

CATALOG

2023-2024

GD ASIAN GROUP CO.,LTD

ROOM 102,BULIDING 7,QINGDAO NETFUND VALLEY,NO 6 HUAZHONG ROAD,
QINGDAO NATIONAL HI-TECH INDUSTRIAL DEVELOPMENT ZONE
www.gdasian.com
info@gdasian.com

GD ASIAN
From China With Passion



COMPANY PROFILE

GD Asian Group limited was established in 2016 and is headquartered in Qingdao, China. We are a private enterprise specializing in manufacturing professional stainless steel refrigeration and catering equipment, with a factory area of more than 25,000 square meters.

The CEO of GD Asian, Giuseppe Dibisceglia, comes from Italy, one of the most productive regions in Europe, and contributes daily to the development of the hospitality industry.

Choosing GD Asian means relying on first class Italian quality, but produced at Chinese costs. All our products are manufactured according to the principles of quality, energy saving and environmental protection. Moreover, our Chinese team provides a comprehensive logistic service, after-sales service and the necessary certificates from CE, Rosh, SASO, UL, ETL, while the products can achieve the European energy class and the American Energy Star.

We will take care of your business!





CONTENTS

STAINLESS STEEL REFRIGERATION

Upright cabinets	01
GN counters	15
Sandwich counters	20
Pizza counters	21
Blast chillers	22
Saladette	23
Refrigerated topping units	31
Reach-in refrigerators	35
Under counters	39
Pizza prep tables	41
Salad prep tables	43
Chef bases	47

ABS REFRIGERATION

ABS line	49
Aluminium line	51

DRINKS

Minibars	53
Backbar cooler	55
Condiment center	63
Slush machine	67
Juice dispenser	71

DISPLAYS

Beverage cooler	75
Four side glass showcase	85
Milk refrigerator	89
Wine cooler	90
Ice cream display	92
Chocolate showcase	93
Cake showcase	94

FREEZER

Chest freezer	95
---------------	----

ICE MAKER

Bullet ice maker	101
Cube ice maker	103
Compact ice maker	104

STAINLESS STEEL FURNITURE

Work table	105
Work cabinet	109
Wall cabinet	113
Bill holder	114
Storgae rack	114

Wall shelf	115
Tableware cabinet	117
Drawer set	118
Serving trolley	119
Tray trolley	123
Stainless steel sinks	127
Sink accessories	130
Hand washbasin	137
Garbage bin	138
Gastronorm Pan	139
Heavy duty wire shelving	155

BAKERY EQUIPMENT

Spiral mixer	163
Planetary mixer	169
Dough divider	171
Electric proofer	172
Pizza oven	172
Pizza accessories	177

FOOD PROCESSING EQUIPMENT

Meat slicer	179
Kebab slicer	181
Vegetable cutter	181
Sausage slicer	182
Meat mincer	182
Cutting mixer	183
Hamburger machine	184
Tomato cutter	184
Immersion blender	185

COOKING EQUIPMENT

Hot plates	187
Gas griddles	191
Gas charbroilers	193
Gas stock pot stoves	195
Gas ranges	197
Electric crepe maker	203
Electric salamander	205
Electric griddle	206
Electric contact grill	207
Electric waffle maker	209
Sous vide cooker	213
Electric fryer	214
Electric toaster	215
Induction cooker	217
Rice cooker	220
Popcorn machine	221
Candy floss machine	222
Water boiler	223
Coffee percolator	224
Electric Warmer	225

STAINLESS STEEL REFRIGERATION





UPRIGHT CABINETS
PREMIUM LINE



Standard Features:

- The independent cassette unit increases the versatility of the enclosure and facilitates after-sale maintenance.
- Energy consumption class A for chiller.
- Energy consumption class B for freezer.
- Three layers of gray coated shelves per door as standard.
- The internal replaceable heating cable prevents condensation.
- The ventilated cooling system, high cooling efficiency, even temperature distribution.
- The solid core dryer provides better cleaning and high efficiency of the system.
- Magnetic sealing strip keeps the cold air inside. Easy to remove without tools.
- CFC free 80 mm foaming thickness.
- High quality compressor: Danfoss, Embraco.
- Digital thermostat: Carel, Dixell.
- Cooling system with automatic defrost.
- Compatible with GN2/1 shelves.
- With lock and key.
- LED light.

Optional:

- Adjustable feet or casters.
- Touch screen thermostat.
- Stainless steel look or paint spray look.
- Color: Black, White, Silver.



PL-610TN



PL-1300TN

Ventilated system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PL-610TN	726*864*2150	605	2~+8	Embraco	Carel	R290	39
PL-610BT	726*864*2150	605	-18~-22	Embraco	Carel	R290	39
PL-1300TN	1410*864*2150	1337	2~+8	Embraco	Carel	R290	21
PL-1300BT	1410*864*2150	1337	-18~-22	Embraco	Carel	R290	21

UPRIGHT CABINETS


MONOBLOCK LINE

Standard Features:

- Monoblock style refrigerators and freezers.
- AISI 201 stainless steel interior and exterior for high-quality products.
- Reversible doors that close automatically when opening less than 90°.
- Rounded inner edges for easy cleaning.
- Magnetic sealing strip keeps the cold air inside. Easy to remove without tools.
- The digital thermostat.
- High-quality compressor: Scope, Embraco.
- Compatible with GN2/1 shelves.
- Cooling system with automatic defrost.
- CFC-free with 60mm super thickness.
- Three layers of gray-coated shelves per door as standard.
- With lock and key.
- LED light.

Optional:

- Adjustable feet or casters.

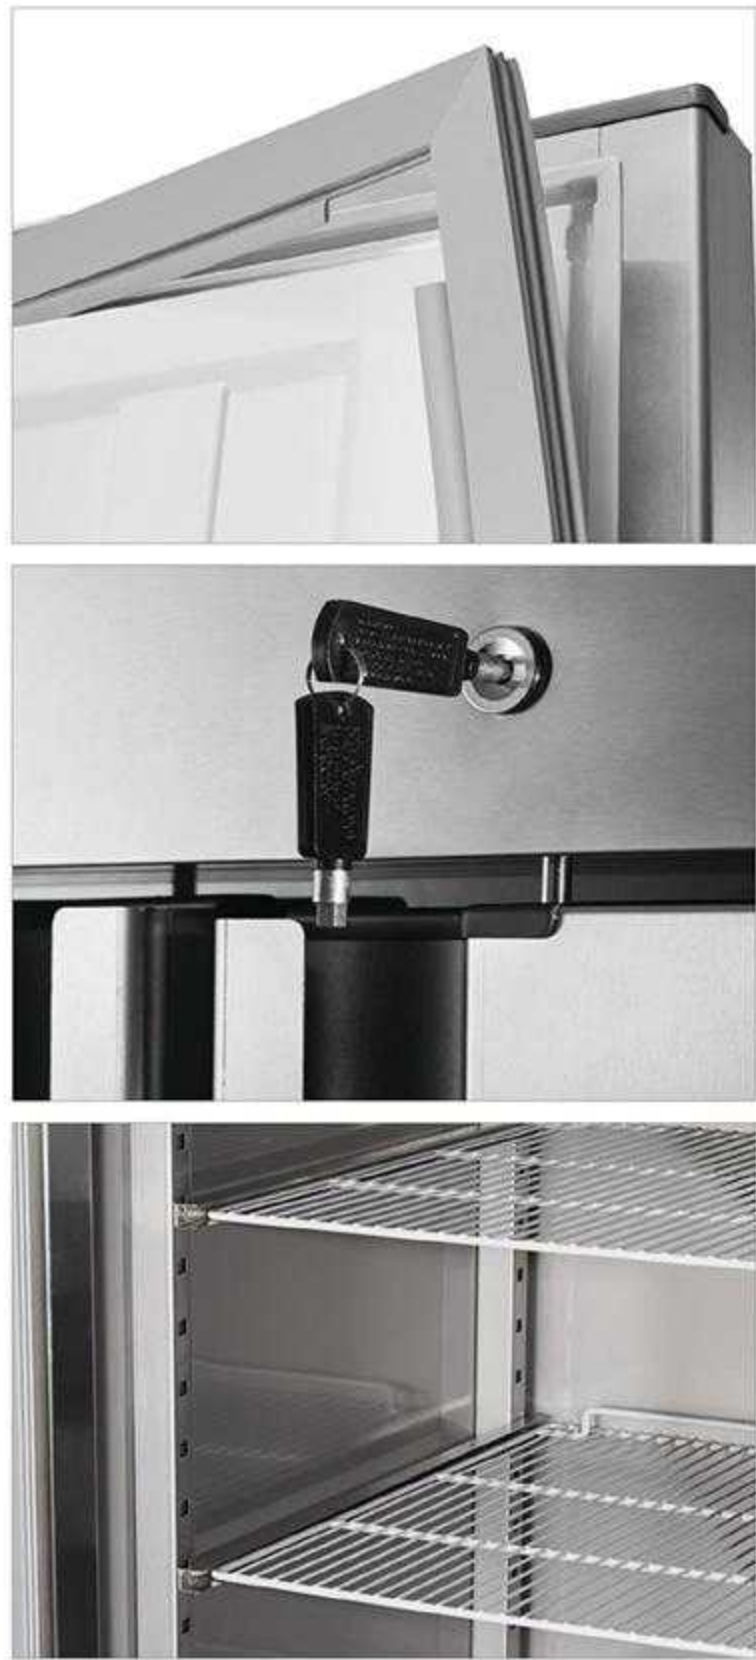

GN650TN-MN

Ventilated system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN650TN-MN	740*830*2010	650	2~+8	Cubigel	touch screen	R290	40
GN650TNG-MN	740*830*2010	650	2~+8	Cubigel	touch screen	R290	40
GN650BT-MN	740*830*2010	650	-18~-22	Cubigel	touch screen	R290	40
GN650BTG-MN	740*830*2010	650	-18~-22	Cubigel	touch screen	R290	40



Standard Features:

- Monoblock style refrigerators and freezers.
- Two full-size S/S door cabinet chillers & freezers.
- Stainless steel 201 interior and exterior.
- Revisable, self-closing door.
- Full-length stainless steel handle.
- Digital thermostat.
- Ventilated cooling.
- 6 adjustable GN2/1 shelves.
- CFC-free with 60mm super thickness.
- With lock and key.
- LED light.

Optional:

- Adjustable feet or casters.



GN1400TN-MN

Ventilated system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN1400TN-MN	1480*830*2010	1300	2~+8	Cubigel	touch screen	R290	15
GN1400TNG-MN	1480*830*2010	1300	2~+8	Cubigel	touch screen	R290	15
GN1400BT-MN	1480*830*2010	1300	-18~-22	Cubigel	touch screen	R290	15
GN1400BTG-MN	1480*830*2010	1300	-18~-22	Cubigel	touch screen	R290	15



UPRIGHT CABINETS GN650

STANDARD LINE

Standard Features:

- European fashion style refrigerators and freezers.
- AISI304 or 201 stainless steel interior and exterior for high-quality products.
- Reversible doors that close automatically when opening less than 90°.
- Rounded inner edges for easy cleaning.
- Magnetic sealing strip keeps the cold air inside. Easy to remove without tools.
- The digital thermostat of well-known brands Dixell, Carel, Eliwell.
- High-quality compressor: Danfoss, Embraco.
- Well-known brand fans from EBM.
- Compatible with GN2/1 shelves.
- Cooling system with automatic defrost.
- Replaceable door center sill with heating elements.
- CFC-free with 60mm super thickness.
- Three layers of gray-coated shelves per door as standard.
- With lock and key.
- LED light.

Optional:

- Adjustable feet or casters.
- Heating element for door frame.



GN650TN



GN650TNG



Ventilated system								
Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity	
GN650TN	740*830*2010	650	2~+8	Secop	Dixell / Carel	R600a	40	
GN650TNG	740*830*2010	650	2~+8	Secop	Dixell / Carel	R600a	40	
GN650TNM	740*830*2010	650	2~+8	Secop	Dixell / Carel	R600a	40	
GN650BT	740*830*2010	650	-18~-22	Secop	Dixell / Carel	R290	40	
GN650BTG	740*830*2010	650	-18~-22	Secop	Dixell / Carel	R290	40	
GN650BTM	740*830*2010	650	-18~-22	Secop	Dixell / Carel	R290	40	



UPRIGHT CABINETS GN1410 SERIES

STANDARD LINE

Standard Features:

- Two full-size S/S door cabinet chillers & freezers.
- Stainless steel interior and exterior.
- Revisable, self-closing door.
- Full-length stainless steel handle.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.
- 6 adjustable GN2/1 shelves.
- CFC free foaming.
- With lock and key.
- LED light.

Optional:

- Adjustable feet or casters.
- Heating element for door frame.



GN1410TN



GN1410TNG



Ventilated system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN1410TN	1480*830*2010	1300	2~+8	Secop	Dixell / Carel	R600a	15
GN1410TNG	1480*830*2010	1300	2~+8	Secop	Dixell / Carel	R600a	15
GN1410TNM	1480*830*2010	1300	2~+8	Secop	Dixell / Carel	R600a	15
GN1410BT	1480*830*2010	1300	-18~-22	Secop	Dixell / Carel	R290	15
GN1410BTG	1480*830*2010	1300	-18~-22	Secop	Dixell / Carel	R290	15
GN1410BTM	1480*830*2010	1300	-18~-22	Secop	Dixell / Carel	R290	15



UPRIGHT CABINETS GN600 SERIES

STANDARD LINE

Standard Features:

- Stainless steel interior and exterior.
- Full-length stainless steel handle.
- Fan cooling system.
- 3 adjustable shelves.
- 60mm insulation thickness CFC free foaming.
- Digital thermostat.
- With lock and key.
- LED light.

Optional:

- Adjustable feet or casters.
- Heating element for door frame.



GN600TN



GN600TNM



GN600TNG



GN600TNF

Static system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN600TNF	680*810*2010	600	0~+10	ZEL	Dixell / Carel	R600a	42
GN600TN	680*810*2010	600	0~+10	ZEL	Dixell / Carel	R600a	42
GN600TNG	680*810*2010	600	0~+10	ZEL	Dixell / Carel	R600a	42
GN600TNM	680*810*2010	600	0~+10	ZEL	Dixell / Carel	R600a	42

Ventilated system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN600TNV	680*810*2010	600	0~+10	ZEL	Dixell / Carel	R600a	42
GN600TNVG	680*810*2010	600	0~+10	ZEL	Dixell / Carel	R600a	42
GN600TNVM	680*810*2010	600	0~+10	ZEL	Dixell / Carel	R600a	42
GN600BTV	680*810*2010	600	-18~-22	Embraco	Dixell / Carel	R290	42
GN600BTVG	680*810*2010	600	-18~-22	Embraco	Dixell / Carel	R290	42
GN600BTVM	680*810*2010	600	-18~-22	Embraco	Dixell / Carel	R290	42

UPRIGHT CABINETS GN1200 SERIES

STANDARD LINE

Standard Features:

- Stainless steel interior and exterior.
- Full-length stainless steel handle.
- Fan cooling system.
- 3 adjustable shelves.
- 60mm insulation thickness CFC free foaming.
- Digital thermostat.
- With lock and key.
- LED light.

Optional:

- Adjustable feet or casters.
- Heating element for door frame.



GN1200TN



GN1200TNM



GN1200TNG

Static system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN1200TN	1340*810*2010	1200	0~+10	Secop	Dixell / Carel	R600a	22
GN1200TNG	1340*810*2010	1200	0~+10	Secop	Dixell / Carel	R600a	22
GN1200TNM	1340*810*2010	1200	0~+10	Secop	Dixell / Carel	R600a	22

Ventilated system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN1200TNV	1340*810*2010	1200	0~+10	Secop	Dixell / Carel	R600a	22
GN1200TNVG	1340*810*2010	1200	0~+10	Secop	Dixell / Carel	R600a	22
GN1200TNVM	1340*810*2010	1200	0~+10	Secop	Dixell / Carel	R600a	22
GN1200BTV	1340*810*2010	1200	-18~-22	Secop	Dixell / Carel	R290	22
GN1200BTVG	1340*810*2010	1200	-18~-22	Secop	Dixell / Carel	R290	22
GN1200BTVM	1340*810*2010	1200	-18~-22	Secop	Dixell / Carel	R290	22



UPRIGHT CABINETS SNACK400 SERIES

STANDARD LINE

Standard Features:

- Stainless steel interior and exterior.
- Full-length stainless steel handle.
- Fan cooling system.
- 3 adjustable shelves.
- 60mm insulation thickness CFC free foaming.
- Digital thermostat.
- With lock and key.
- LED light.

Optional:

- Adjustable feet or casters.
- Heating element for door frame.



SNACK400TN



SNACK400TNM



SNACK400TNG

Static system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SNACK400TN	680*710*2010	429	0~+10	ZEL	Dixell / Carel	R600a	48
SNACK400TNG	680*710*2010	429	0~+10	ZEL	Dixell / Carel	R600a	48
SNACK400TNM	680*710*2010	429	0~+10	ZEL	Dixell / Carel	R600a	48

Ventilated system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SNACK400TNV	680*710*2010	429	0~+10	ZEL	Dixell / Carel	R600a	48
SNACK400TNVG	680*710*2010	429	0~+10	ZEL	Dixell / Carel	R600a	48
SNACK400TNVM	680*710*2010	429	0~+10	ZEL	Dixell / Carel	R600a	48
SNACK400BTV	680*710*2010	429	-18~-22	Embraco	Dixell / Carel	R290	48
SNACK400BTVG	680*710*2010	429	-18~-22	Embraco	Dixell / Carel	R290	48
SNACK400BTVM	680*710*2010	429	-18~-22	Embraco	Dixell / Carel	R290	48

UPRIGHT CABINETS SNACK800 SERIES

STANDARD LINE

Standard Features:

- Stainless steel interior and exterior.
- Full-length stainless steel handle.
- Fan cooling system.
- 3 adjustable shelves.
- 60mm insulation thickness CFC free foaming.
- Digital thermostat.
- With lock and key.
- LED light.

Optional:

- Adjustable feet or casters.
- Heating element for door frame.



SNACK800TN



SNACK800TNM



SNACK800TNG

Static system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SNACK800TN	1340*710*2010	1065	0~+10	Secop	Dixell / Carel	R600a	25
SNACK800TNG	1340*710*2010	1065	0~+10	Secop	Dixell / Carel	R600a	25
SNACK800TNM	1340*710*2010	1065	0~+10	Secop	Dixell / Carel	R600a	25

Ventilated system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SNACK800TNV	1340*710*2010	1065	0~+10	Secop	Dixell / Carel	R600a	25
SNACK800TNVG	1340*710*2010	1065	0~+10	Secop	Dixell / Carel	R600a	25
SNACK800TNVM	1340*710*2010	1065	0~+10	Secop	Dixell / Carel	R600a	25
SNACK800BTV	1340*710*2010	1065	-18~-22	Secop	Dixell / Carel	R290	25
SNACK800BTVG	1340*710*2010	1065	-18~-22	Secop	Dixell / Carel	R290	25
SNACK800BTVM	1340*710*2010	1065	-18~-22	Secop	Dixell / Carel	R290	25



UPRIGHT CABINETS BAKERY SERIES

STANDARD LINE



Standard Features:

- A full S / S solid door bakery cabinet freezer.
- Stainless steel interior and exterior.
- Revisable self-closing door.
- Stainless steel full-length handle.
- 10 adjustable baking trays 600*800, no GN pans.
- CFC-free foam 60mm insulation thickness.
- Digital thermostat.
- Automatic defrost.
- With lock and key.
- LED light.

Optional:

- Adjustable feet or castors.
- Heating element for door frame.



Ventilated system

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PA-800TN	740*990*2010	737	0~+10	Secop	Dixell / Carel	R600a	33
PA-800BT	740*990*2010	737	-18~-22	Secop	Dixell / Carel	R290	33
GE-800TN	740*990*2010	737	0~+10	Secop	Dixell / Carel	R600a	33
GE-800BT	740*990*2010	737	-18~-22	Secop	Dixell / Carel	R290	33





GN COUNTERS

STANDARD LINE

Standard Features:

- Stainless steel interior and exterior.
- Reversible self-closing door.
- Full-length stainless steel handle.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.

Optional:

- Adjustable feet or castors.
- With GN1/3,GN2/3,GN1/2 drawers.
- Interior lighting LED.



SOLID DOOR without backsplash

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN2100TN	1360*700*850	282	2~+8	Zel	Carel	R600a	48
GN2100BT	1360*700*850	282	-18~-22	Secop	Carel	R290	48
GN3100TN	1795*700*850	417	2~+8	Zel	Carel	R600a	38
GN3100BT	1795*700*850	417	-18~-22	Secop	Carel	R290	38
GN4100TN	2230*700*850	553	2~+8	Zel	Carel	R600a	32
GN4100BT	2230*700*850	553	-18~-22	Secop	Carel	R290	32



SOLID DOOR with backsplash

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN2200TN	1360*700*950	282	2~+8	Zel	Carel	R600a	48
GN2200BT	1360*700*950	282	-18~-22	Secop	Carel	R290	48
GN3200TN	1795*700*950	417	2~+8	Zel	Carel	R600a	38
GN3200BT	1795*700*950	417	-18~-22	Secop	Carel	R290	38
GN4200TN	2230*700*950	553	2~+8	Zel	Carel	R600a	32
GN4200BT	2230*700*950	553	-18~-22	Secop	Carel	R290	32



GLASS DOOR without backsplash

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN2100TNG	1360*700*850	282	2~+8	Zel	Carel	R600a	48
GN2100BTG	1360*700*850	282	-18~-22	Secop	Carel	R290	48
GN3100TNG	1795*700*850	417	2~+8	Zel	Carel	R600a	38
GN3100BTG	1795*700*850	417	-18~-22	Secop	Carel	R290	38
GN4100TNG	2230*700*850	553	2~+8	Zel	Carel	R600a	32
GN4100BTG	2230*700*850	553	-18~-22	Secop	Carel	R290	32



GLASS DOOR with backsplash

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN2200TNG	1360*700*950	282	2~+8	Zel	Carel	R600a	48
GN2200BTG	1360*700*950	282	-18~-22	Secop	Carel	R290	48
GN3200TNG	1795*700*950	417	2~+8	Zel	Carel	R600a	38
GN3200BTG	1795*700*950	417	-18~-22	Secop	Carel	R290	38
GN4200TNG	2230*700*950	553	2~+8	Zel	Carel	R600a	32
GN4200BTG	2230*700*950	553	-18~-22	Secop	Carel	R290	32



GN COUNTERS

STANDARD LINE

Standard Features:

- Stainless steel interior and exterior.
- Reversible self-closing door.
- Full-length stainless steel handle.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.

Optional:

- Adjustable feet or castors.
- With GN1/3,GN2/3,GN1/2 drawers.
- Interior lighting LED.



1 door + 2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN2120TN	1360*700*850	282	2~+8	Zel	Carel	R600a	48



4 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN2140TN	1360*700*850	282	2~+8	Zel	Carel	R600a	48



2 doors + 2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN3120TN	1795*700*850	417	2~+8	Zel	Carel	R600a	38



1 door + 4 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN3140TN	1795*700*850	417	2~+8	Zel	Carel	R600a	38



1 door + 4 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN3160TN	1795*700*850	417	2~+8	Zel	Carel	R600a	38



3 doors + 2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN4120TN	2230*700*850	553	2~+8	Zel	Carel	R600a	32



2 doors + 4 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN4140TN	2230*700*950	553	2~+8	Zel	Carel	R600a	32



1 doors + 6 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN4160TN	2230*700*950	553	2~+8	Zel	Carel	R600a	32



8 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
GN4180TN	2230*700*950	553	2~+8	Zel	Carel	R600a	32



UNDERCOUNTERS

STANDARD LINE



Standard Features:

- Undercounter unit with 650mm height.
- Stainless steel interior and exterior.
- Reversible self-closing door.
- Full-length stainless steel handle.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.

Optional:

- Adjustable feet or castors.

BAKERY COUNTERS

STANDARD LINE

Standard Features:

- Two S/S solid door PA refrigerated counter.
- PA bakery counter with 800mm depth.
- Stainless steel interior and exterior.
- Reversible self-closing door.
- Stainless steel full-length handle.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.
- 2 adjustable shelves.

Optional:

- Adjustable feet or castors.
- Internal LED lighting.
- Lock and key.



Undercounters

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
U-GN2100TN	1360*700*650	214	2~+8	Zel	Carel	R600a	72
U-GN2100BT	1360*700*650	214	-18~-22	Secop	Carel	R600a	72
U-GN3100TN	1795*700*650	317	2~+8	Zel	Carel	R600a	54
U-GN3100BT	1795*700*650	317	-18~-22	Secop	Carel	R600a	54
U-GN4100TN	2230*700*650	420	2~+8	Zel	Carel	R290	48
U-GN4100BT	2230*700*650	420	-18~-22	Secop	Carel	R290	48

Bakery counters

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PA2100TN	1510*800*850	390	2~+8	Zel	Carel	R600a	30
PA3100TN	2020*800*850	580	2~+8	Zel	Carel	R290	28

SANDWICH COUNTERS

STANDARD LINE



Standard Features:

- Top-mounted coolers with 700 mm and 800 mm depths.
- Compatible GN1/3 pans on Prep-Top.
- Stainless steel interior and exterior.
- Reversible, self-closing door.
- Full-length stainless steel handle.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.

Optional:

- Adjustable feet or casters.
- Internal LED lighting.
- Lock and way.
- GN1/4, GN1/6 pans on Pre-top.



Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SH2000/700	1360*700*1085	282	2~+8	Zel	Carel	R600a	48
SH2000/800	1510*800*1085	390	2~+8	Zel	Carel	R600a	30



Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SH3000/700	1795*700*1085	417	2~+8	Zel	Carel	R290	38
SH3000/800	2020*800*1085	580	2~+8	Zel	Carel	R290	28



PIZZA COUNTERS

STANDARD LINE

Standard Features:

- Pizza counter with VRX on the top.
- Marble worktop.
- With 7 sets of multifunctional drawers.
- Stainless steel interior and exterior.
- Reversible self-closing door.
- Continuous stainless steel handle.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.

Optional:

- Adjustable feet or castors.
- Internal LED lighting.
- Lock and key.



Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PZ-2600TN	1510*800*1000	390	2~+8	Zel	Carel	R600a	30
VRX-1500/380	1500*395*435	GN1/3 * 5 + GN1/2*1	0~+10	Zel	Carel	R600a	261



Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PZ-1610TN	1510*800*1000	390	2~+8	Zel	Carel	R600a	30
VRX-1500/380	1500*395*435	GN1/3*5 + GN1/2*1	0~+10	Zel	Carel	R600a	261



Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PZ-3600TN	2020*800*1000	580	2~+8	Secop	Carel	R290	28
VRX-2000/380	2000*395*435	GN1/3*9	0~+10	Zel	Carel	R600a	196



Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PZ-2610TN	2025*800*1000	580	2~+8	Secop	Carel	R290	28
VRX-2000/380	2000*395*435	GN1/3*9	0~+10	Zel	Carel	R600a	196

BLAST CHILLER

Standard Features:

- Enlarged evaporator with fan cooling.
- European brand compressor.
- Static.
- Automatic defrost.
- Dixell digital thermostat.
- Compatible for 3 GN tray, 5 GN tray , 10 GN tray.

Optional:

- Adjustable feet or lockable castors.



Static system | 80mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Temperature(°C)	Compressor	Thermostat	Coolant	40"loading Quantity
Blast-3	750*740*730	75	+80°C/0°C In 50 min	Secop	Dixell/Carel	R290	135
Blast-5	750*740*870	110	0°C/-18°C In 85 min	Secop	Dixell/Carel	R290	90
Blast-10	800*815*1625	245		Secop	Dixell/Carel	R290	28

SALADETTE



Standard Features:

- European standard Saladette.
- AISI304 stainless steel interior and exterior.
- Rounded inner edges for easy cleaning.
- Magnetic sealing strip keeps the cold air inside.
- Easy to remove without tools.
- Digital thermostat of famous Italian brand Dixell, Carel.
- High quality famous compressor: Embraco, Zanussi.
- Compatible for GN1/1 pans and GN1/6 pans.
- Fan cooling system.
- CFC free foaming.

Optional:

- Ventilated cooling system/glass doors/SS201 material.
- Adjustable feet or small swivel casters.



S-450



S-900



S-903

Static with fan cooling

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
S-450	450*700*850	108	0~+10	Zel	Carel	R600a	150
S-900	900*700*850	240	0~+10	Zel	Carel	R600a	72
S-903	1365*700*850	368	0~+10	Zel	Carel	R290	48



Standard Features:

- Saladette with stainless steel tabletop.
- Inside and outside are made of stainless steel AISI304.
- Rounded inner edges for easy cleaning.
- Magnetic sealing strip keeps the cold air inside.
- Easy to remove without the use of tools.
- The digital thermostat of the famous Italian brand Dixell, Carel.
- High-quality famous compressor: Embraco, Zanussi.
- GN1/1 shelves+GN1/2 drawer.
- Fan-assisted cooling system.
- CFC free foaming.

Optional:

- Ventilated cooling system/glass doors/SS201 material.
- Adjustable feet or small casters.



S-901



S-901 2D



S-901 4D

Static with fan cooling

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
S-901	900*700*850	240	0~+10	Zel	Carel	R600a	72
S-901 2D	900*700*850	230	0~+10	Zel	Carel	R600a	72
S-901 4D	900*700*850	220	0~+10	Zel	Carel	R600a	72



SALADETTE



Standard Features:

- Saladette with solid door and granite top.
- Refrigerated topping well for GN1/6 pans.
- Interior and exterior in AISI304 stainless steel.
- Rounded inner edges for easy cleaning.
- Magnetic sealing strip keeps the cold air inside. Easy to remove without tools.
- Digital thermostat of the famous Italian brand Dixell, Carel, Eliwell.
- High quality famous compressor: Embraco, Zanussi 2*GN1/1 shelves.
- Fan assisted cooling system.

Optional:

- Ventilated cooling system/glass doors/SS201 material/R290 new refrigerant.



Static with fan cooling

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PS-900	900*700*1075	240	0~+10	Zel	carel	R600a	72



Static with fan cooling

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PS-903	1365*700*1075	402	0~+10	Secop	Carel	R600a	48



Static with fan cooling

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PS-200	900*700*970	240	0~+10	Zel	Carel	R600a	72



Static with fan cooling

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
PS-300	1365*700*970	392	0~+10	Zel	Carel	R600a	48



SALADETTE



Standard Features:

- Saladette with three solid doors and square glass cover.
- Suitable for 4*GN1/1 pans.
- Interior and exterior made of AISI304 stainless steel.
- Rounded inner edges for easy handling.
- Magnetic sealing strip keeps the cold air inside.
- Easy to remove without the use of tools.
- Digital thermostat Italian famous brand.
- High-quality famous compressor: Embraco, Zanussi.
- Fan-assisted cooling system.

Optional:

- Ventilated cooling system.
- Glass doors/SS201 material.
- R290 new refrigerant.



Standard Features:

- Saladette with three solid stainless steel doors and granite top.
- The Interior and exterior are made of stainless steel AISI304.
- Inner box curved edges for easy cleaning.
- Magnetic sealing strip keeps the cold air inside.
- Easy to remove without tools.
- Digital thermostat: Carel, Eliwell.
- High-quality famous compressor: Embraco, Zanussi.
- Fan-assisted cooling system.
- CFC-free foaming.
- Adjustable feet or small casters.

Optional:

- Ventilated cooling system.
- Glass doors/SS201 material.
- R290 new refrigerant.



Static with fan cooling

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
S-900CG	900*700*850	240	0~+10	Zel	Carel	R600a	72
S-903CG	1365*700*850	368	0~+10	Secop	Carel	R290	48



Static with fan cooling

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
S-900SQ	900*700*850	240	0~+10	Zel	Carel	R600a	72
S-903SQ	1365*700*850	368	0~+10	Secop	Carel	R290	48



Static with fan cooling

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
S-903PZ	1400*700*1020	368	0~+10	Secop	Carel	R600a	48
VRX-1400/330	1400*335*435	GN1/4*6	0~+10	Zel	Carel	R600a	343



SALADETTE



Standard Features:

- Saladette with three solid doors and stainless steel tabletop.
- Inside and outside made of stainless steel AISI304.
- Rounded inner edges for easy cleaning.
- Magnetic sealing strip keeps the cold air inside.
- Easy to remove without tools.
- Digital thermostat : Dixell, Carel, Eliwell.
- High-quality famous compressor: Embraco, Zanussi.
- Fan-assisted cooling system.

Optional:

- Ventilated cooling system.
- Glass doors/SS201 material.
- R290 new refrigerant.



S-903 S/S TOP



S-903-6D




Static with fan cooling

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
S-903 S/S TOP	1365*700*850	368	0~+10	Secop	Carel	R290	48
S-903-6D	1365*700*850	368	0~+10	Secop	Carel	R290	48





REFRIGERATED TOPPING UNITS

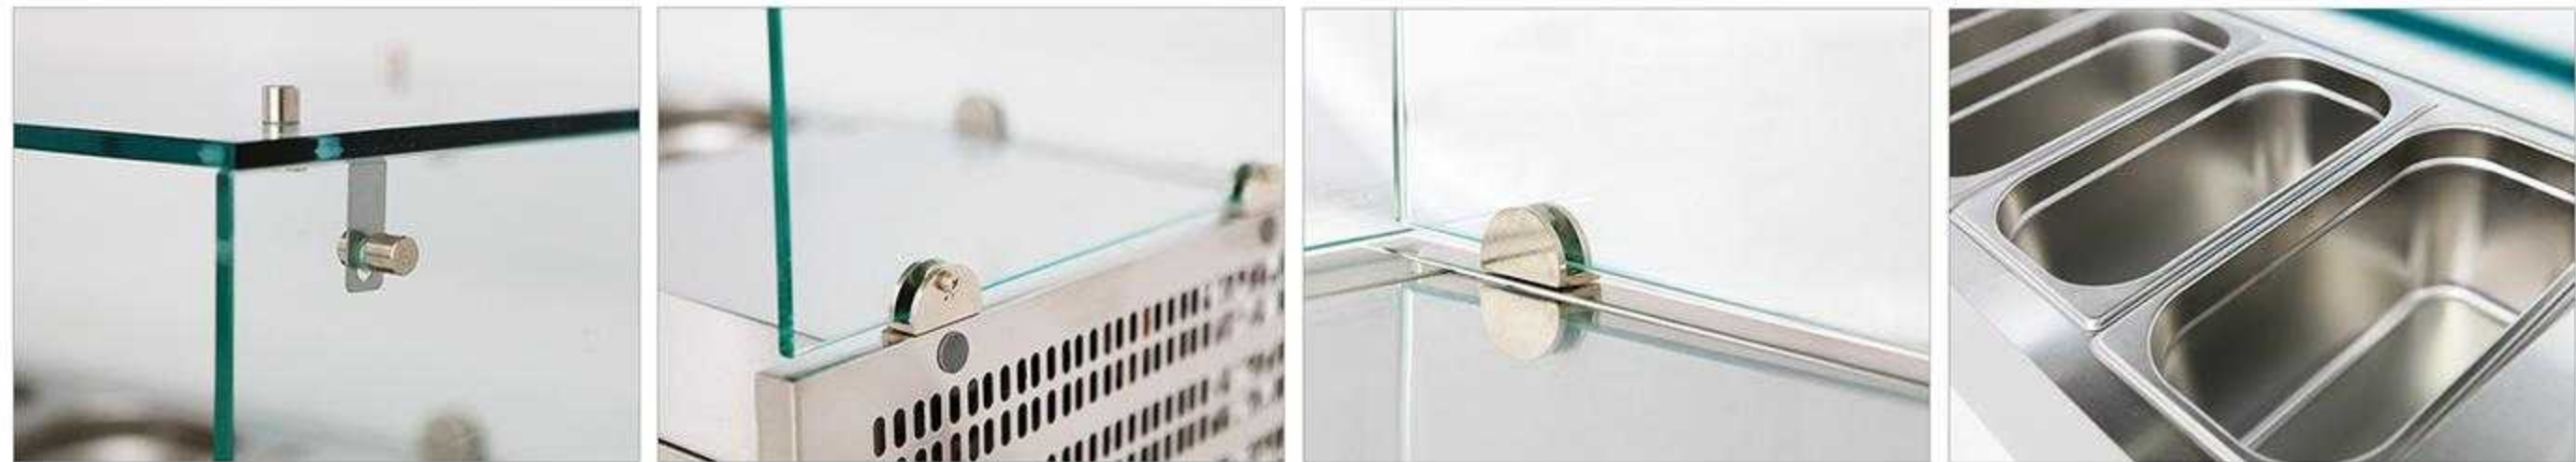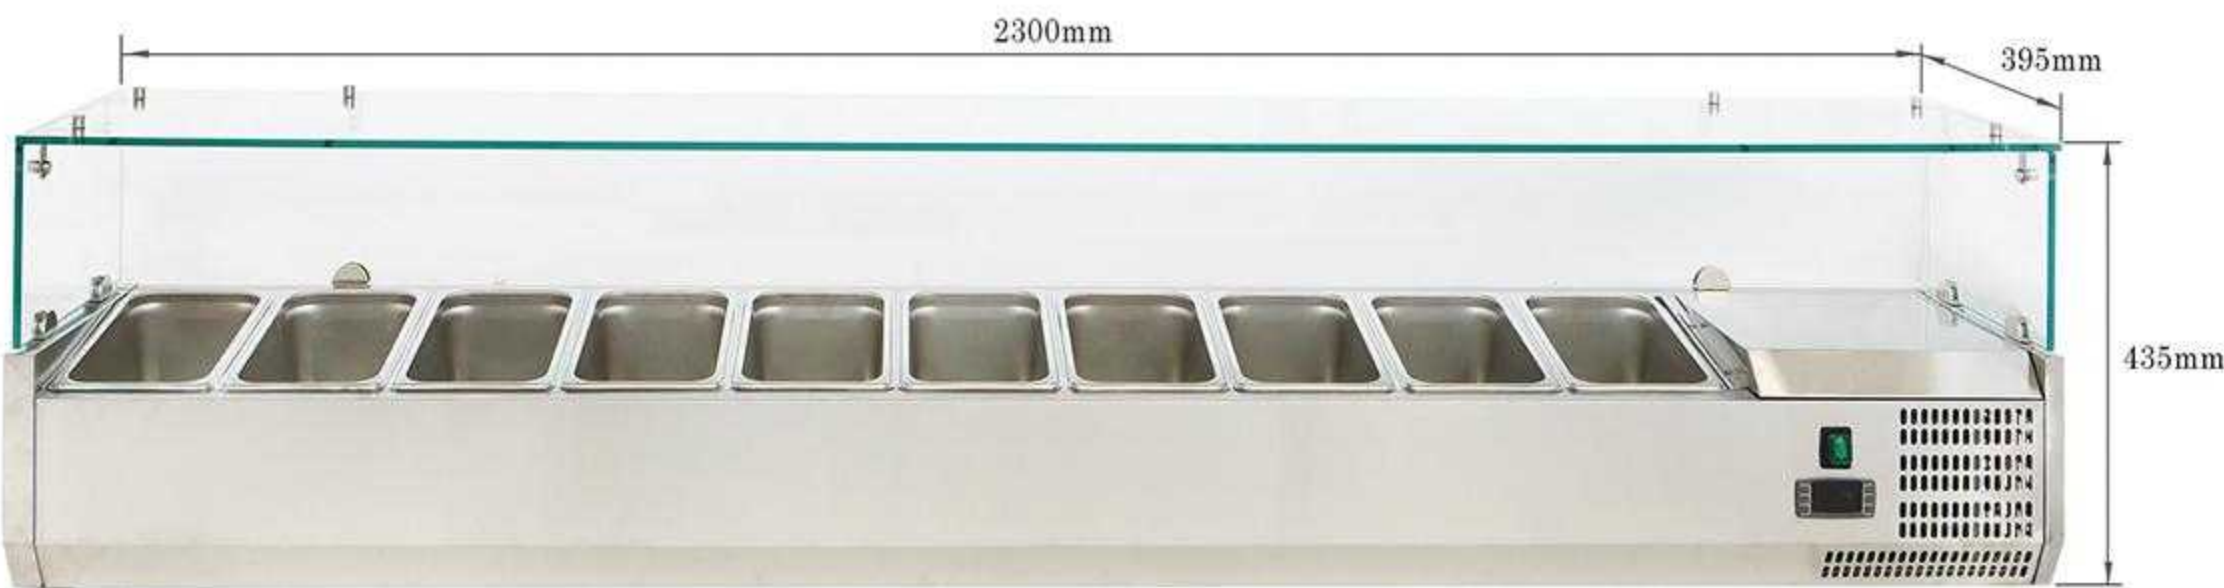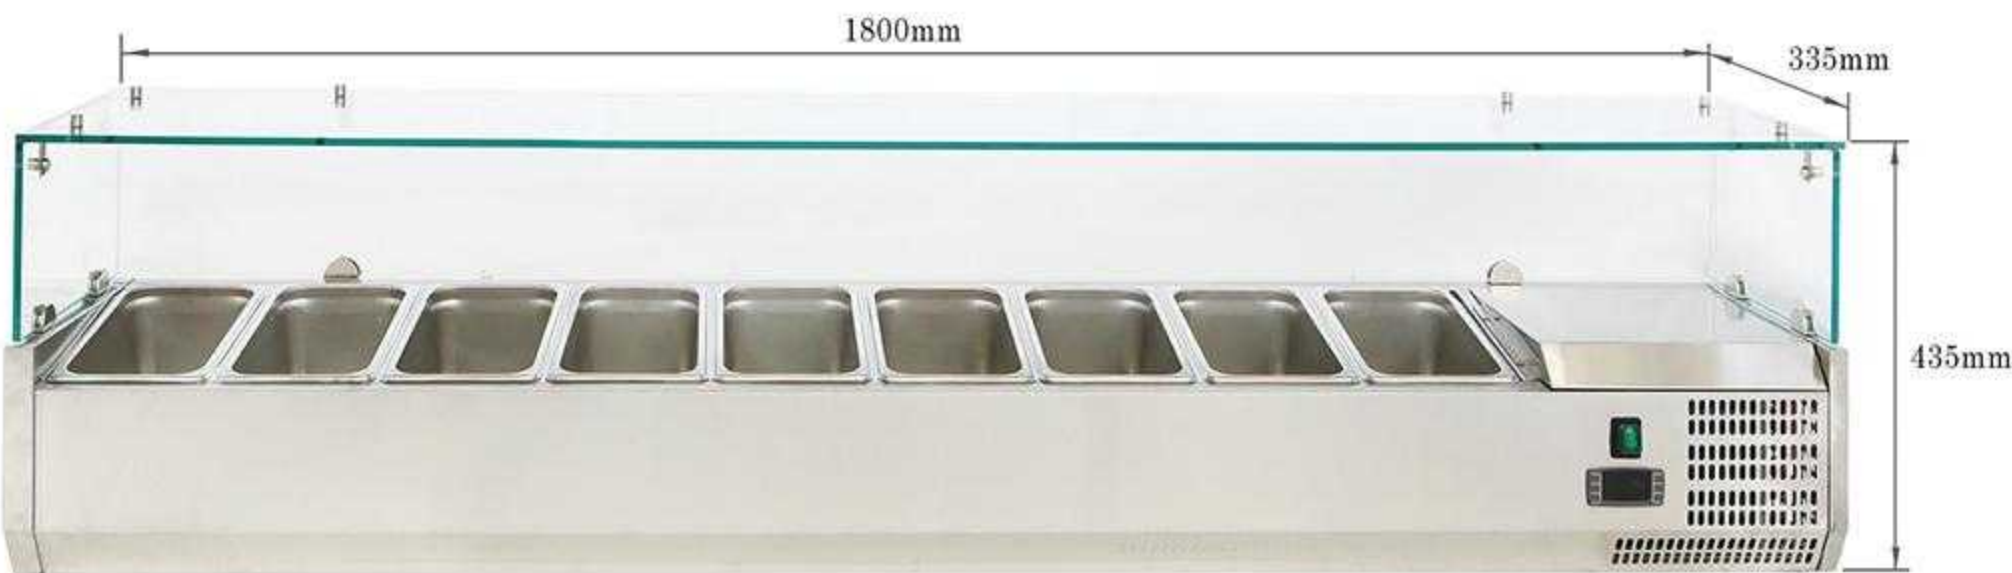

Standard Features:


- Top glass cover.
- Interior and exterior stainless steel AISI304 material for high level product.
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell.
- High quality famous compressor: Embraco, Zanussi.
- Accept GN1/4 pans for 30 range and GN1/3 pans for 380 range.
- CFC free foaming.
- R134a/R600a.
- Adjustable feet.

Optional:

- Top stainless steel cover/SS201 material.


Static System

Model no	VRX-1200/330	VRX-1400/330	VRX-1500/330	VRX-1600/330	VRX-1800/330	VRX-2000/330
Dimensions (mm)	1200*335*435	1400*335*435	1500*335*435	1600*335*435	1800*335*435	2000*335*435
Net capacity(L)	GN1/4*5	GN1/4*6	GN1/4*7	GN1/4*8	GN1/4*9	GN1/4*10
Temperature (°C)	0~+10	0~+10	0~+10	0~+10	0~+10	0~+10
Compressor	ZEL	ZEL	ZEL	ZEL	ZEL	ZEL
Digital thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R600a	R600a	R600a	R600a	R600a	R600a
40 ' loading quantity	386	336	310	294	260	242

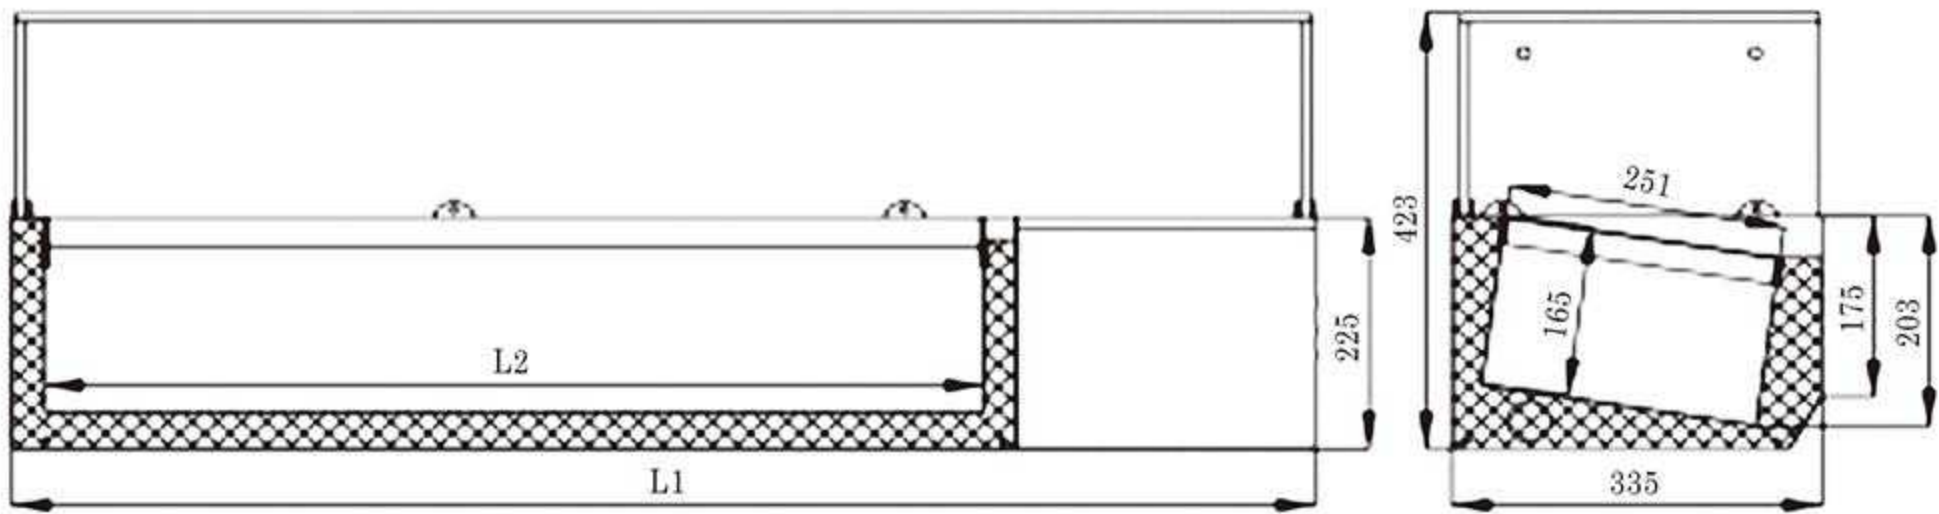


Static System

Model no	VRX-1200/380	VRX-1400/380	VRX-1500/380	VRX-1600/380	VRX-1800/380	VRX-2000/380
Dimensions (mm)	1200*395*435	1400*395*435	1500*395*435	1600*395*435	1800*395*435	1800*395*435
Net capacity(L)	GN1/3*3+GN1/2*1	GN1/3*4+GN1/2*1	GN1/3*5+GN1/2*1	GN1/3*7	GN1/3*8	GN1/3*8
Temperature (°C)	0~+10	0~+10	0~+10	0~+10	0~+10	0~+10
Compressor	ZEL	ZEL	ZEL	ZEL	ZEL	ZEL
Digital thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R600a	R600a	R600a	R600a	R600a	R600a
40 ' loading quantity	323	280	261	247	218	218

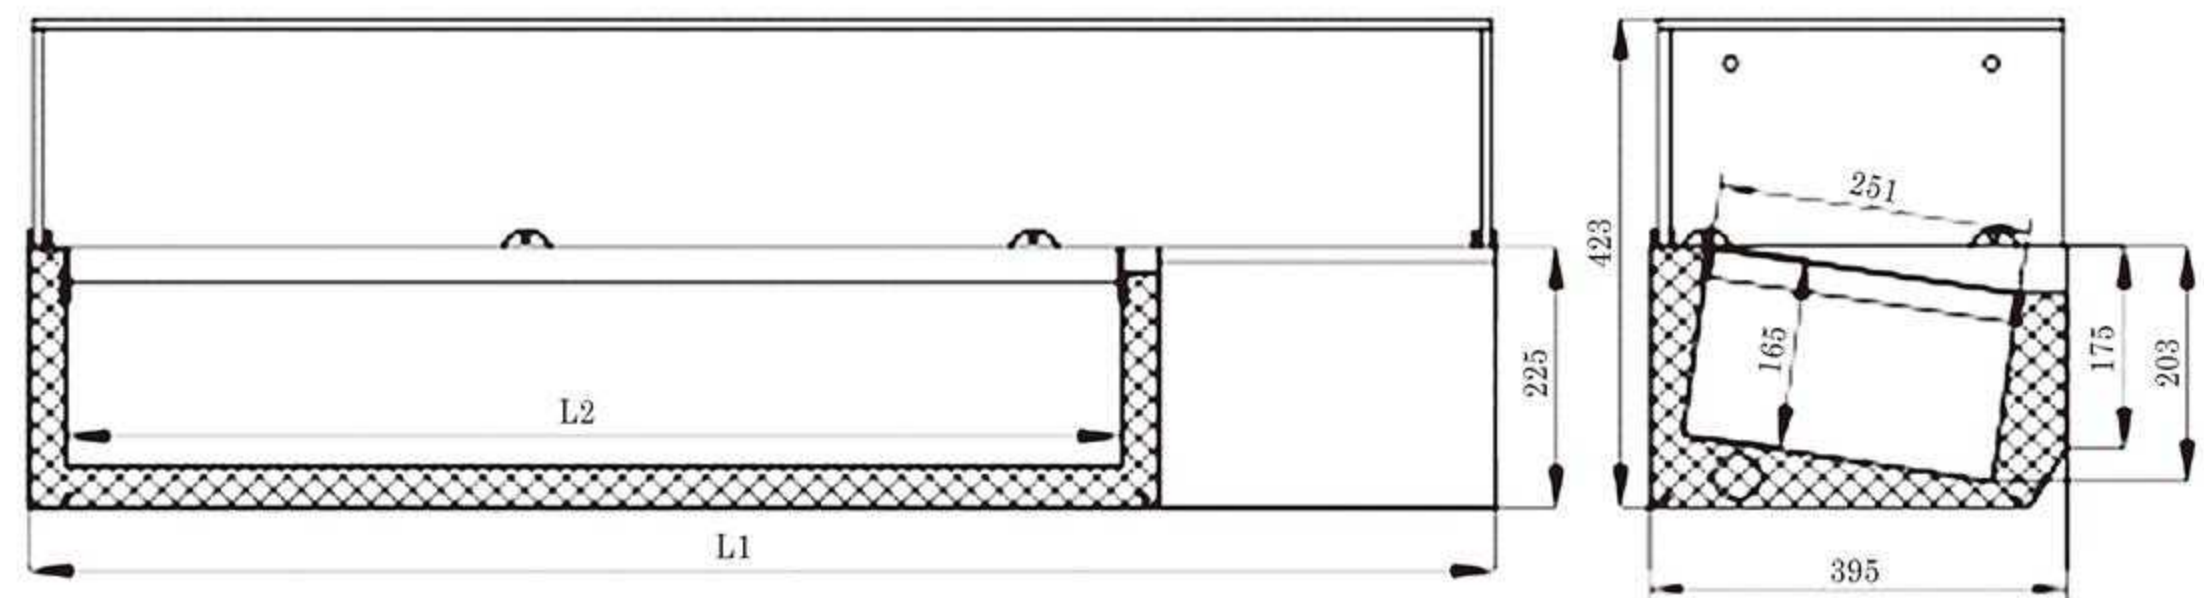



REFRIGERATED TOPPING UNITS

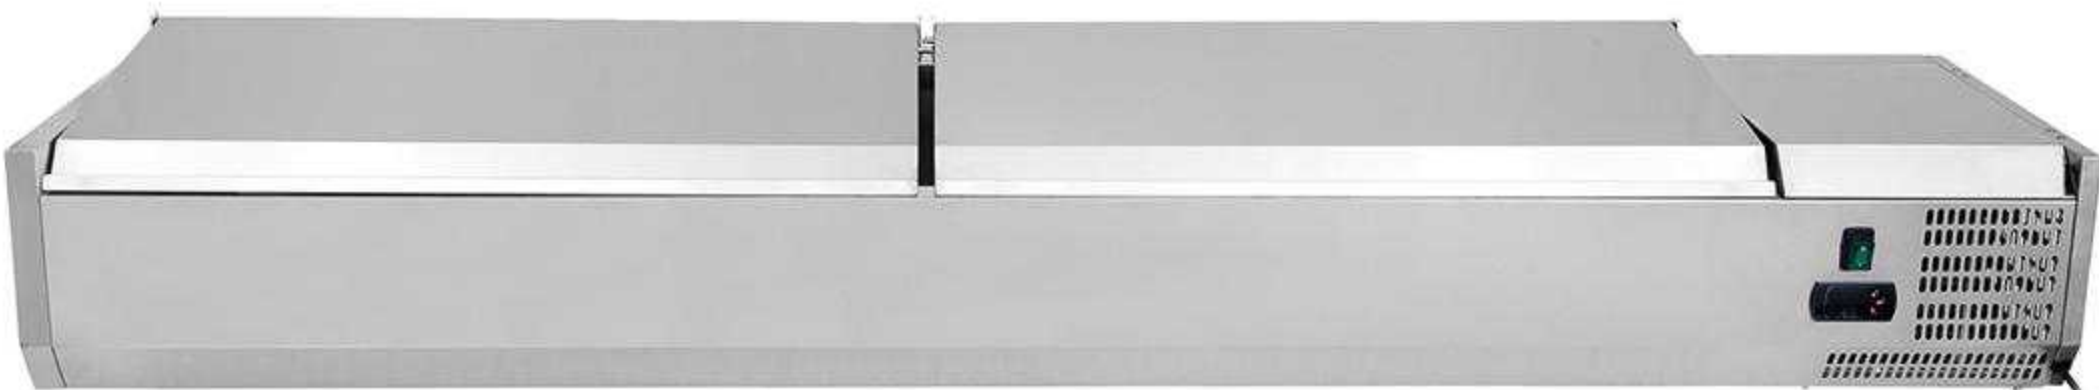

Standard Features:


- Top stainless steel cover.
- Interior and exterior stainless steel AISI304 material for high level product.
- Digital thermostat Italian famous brand Dixell, Carel,Eliwell.
- High quality famous compressor: Embraco,Zanussi.
- Accept GN1/4 pans for 30 range and GN1/3 pans for 380 range.
- CFC free foaming.
- R134a/R600a.
- Adjustable feet.

Optional:

- SS201 material/R290 new refrigerant.


Static System

Model no	VRX-1200/330S	VRX-1400/330S	VRX-1500/330S	VRX-1600/330S	VRX-1800/330S	VRX-2000/330S
Dimensions (mm)	1200*335*281	1400*335*281	1500*335*281	1600*335*281	1800*335*281	2000*335*281
Net capacity(L)	GN1/4*5	GN1/4*6	GN1/4*7	GN1/4*8	GN1/4*9	GN1/4*10
Temperature (°C)	0~+10	0~+10	0~+10	0~+10	0~+10	0~+10
Compressor	ZEL	ZEL	ZEL	ZEL	ZEL	ZEL
Digital thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R600a	R600a	R600a	R600a	R600a	R600a
40 ' loading quantity	386	336	310	294	260	242

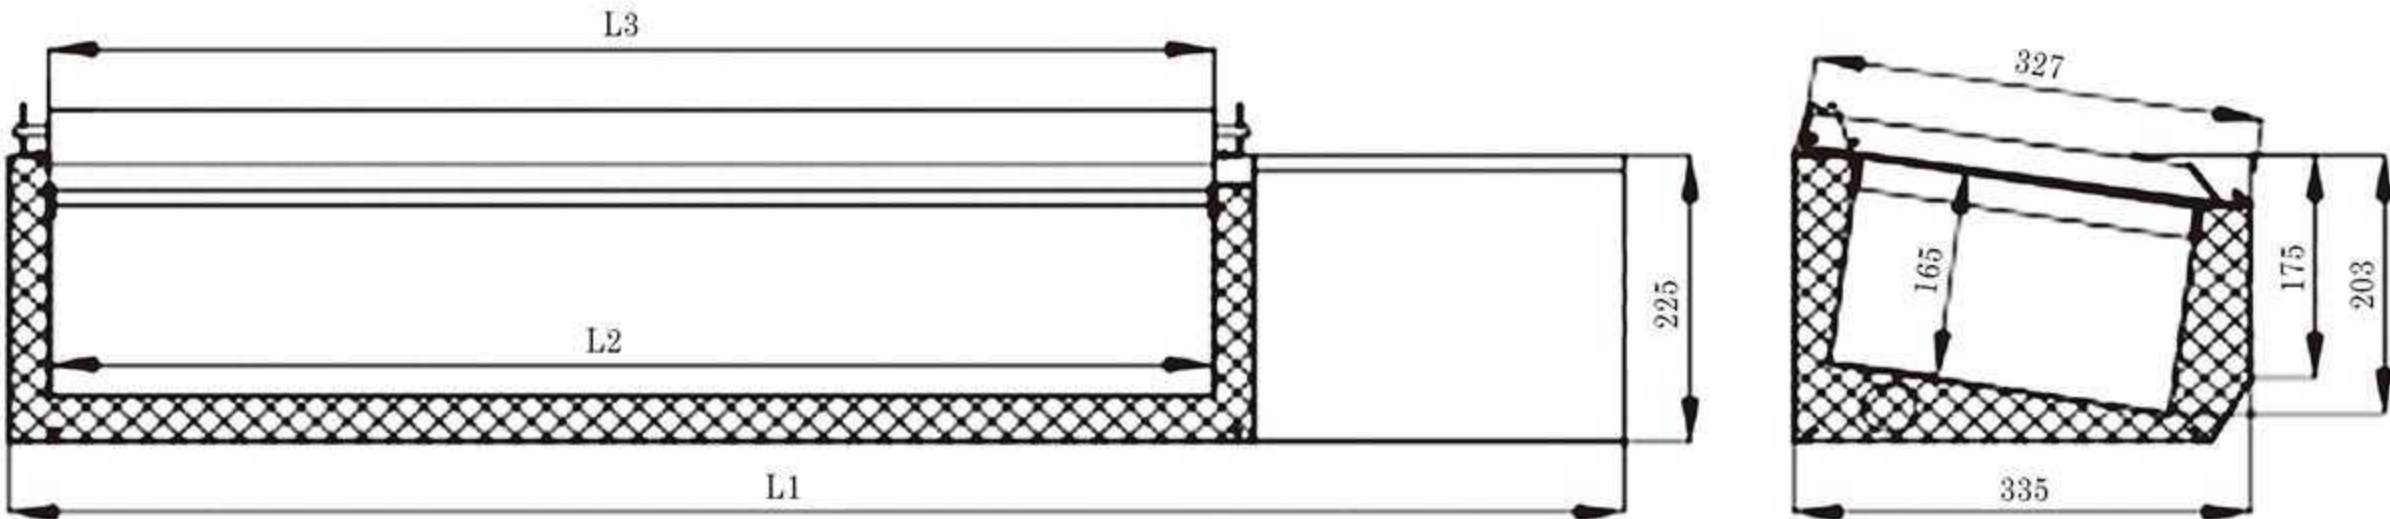

Static System

Model no	VRX-1200/380S	VRX-1400/380S	VRX-1500/380S	VRX-1600/380S	VRX-1800/380S	VRX-2000/380S
Dimensions (mm)	1200*395*281	1400*395*281	1500*395*281	1600*395*281	1800*395*281	2000*395*281
Net capacity(L)	GN1/3*3+GN1/2*1	GN1/3*4+GN1/2*1	GN1/3*5+GN1/2*1	GN1/3*7	GN1/4*8	GN1/4*9
Temperature (°C)	0~+10	0~+10	0~+10	0~+10	0~+10	0~+10
Compressor	ZEL	ZEL	ZEL	ZEL	ZEL	ZEL
Digital thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Kind of coolant	R600a	R600a	R600a	R600a	R600a	R600a
40 ' loading quantity	323	280	261	247	218	196

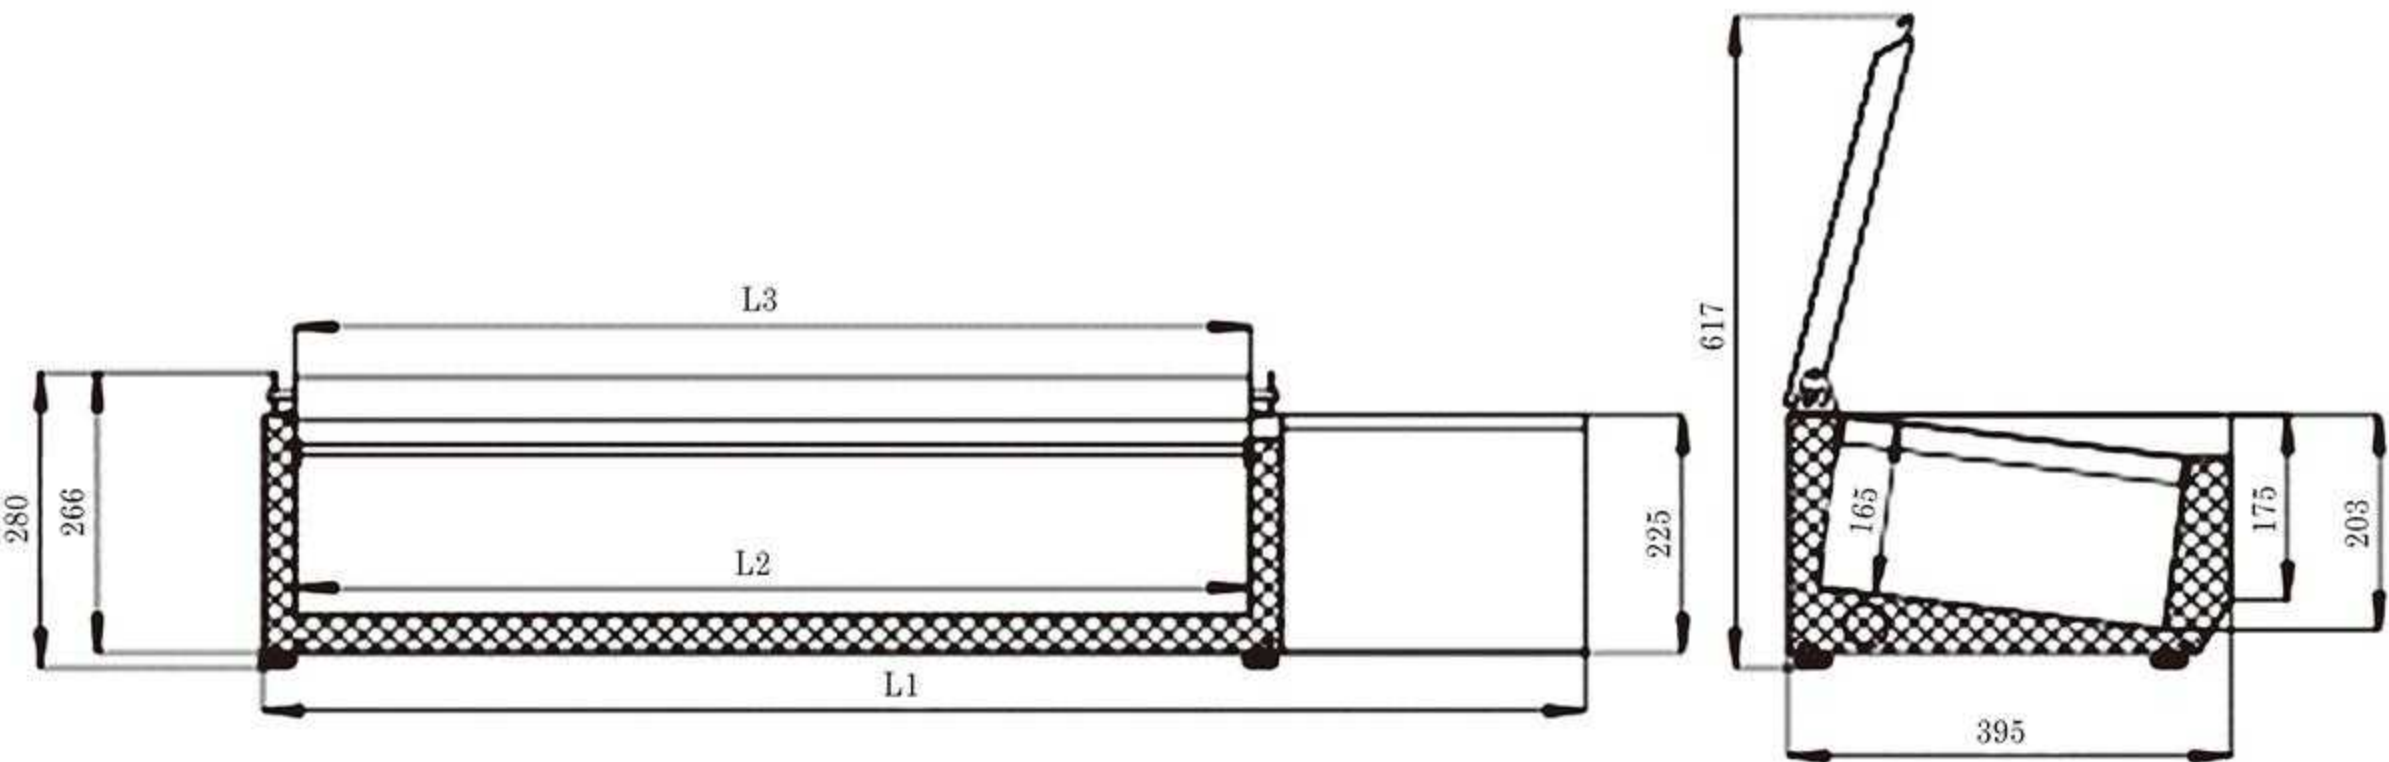

REACH-IN REFRIGERATOR

SOLID DOOR

Standard Features:


- Internal LED light.
- Stainless steel exterior & interior.
- Inner box curved edges for easy cleaning.
- Door lock and key standard for all refrigerators.
- Magnetic door gasket(s) standard for positive door seal.
- Reversible and automatically self close door when less than 90° open.
- Refrigerator climate class : N.
- Door handle can be customized with recessed door handles.
- Ventilated system, down duct refrigeration to ensure even distribution of air.
- Embraco compressor units with environmentally friendly R290 refrigerant.
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell.

Optional:


- Extra shelves: includes 4 shelf clips per shelf.
- Middle shelf.
- Adjustable feet.




GD-23BR

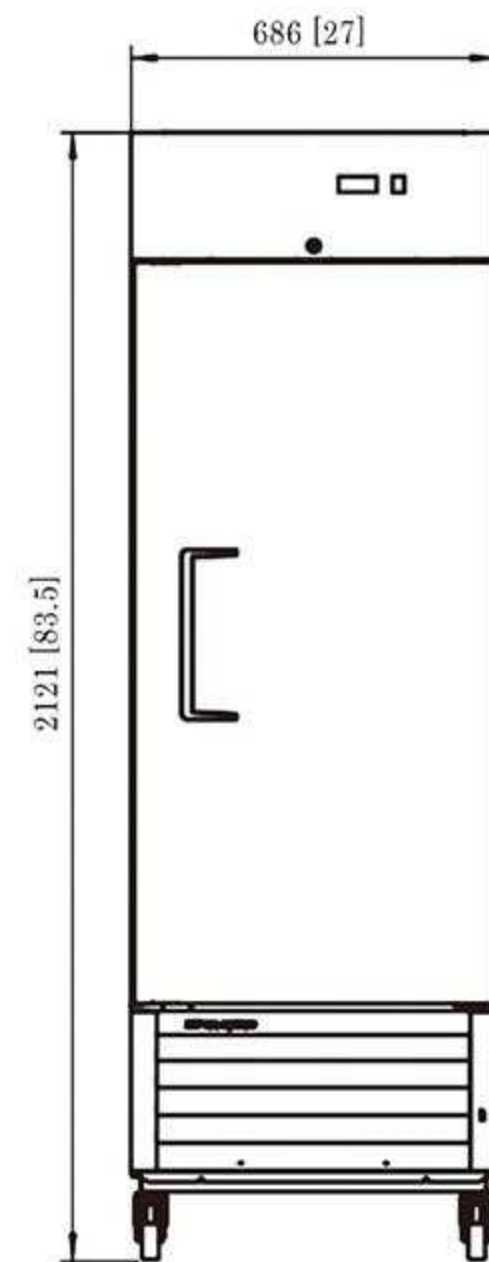

Front view

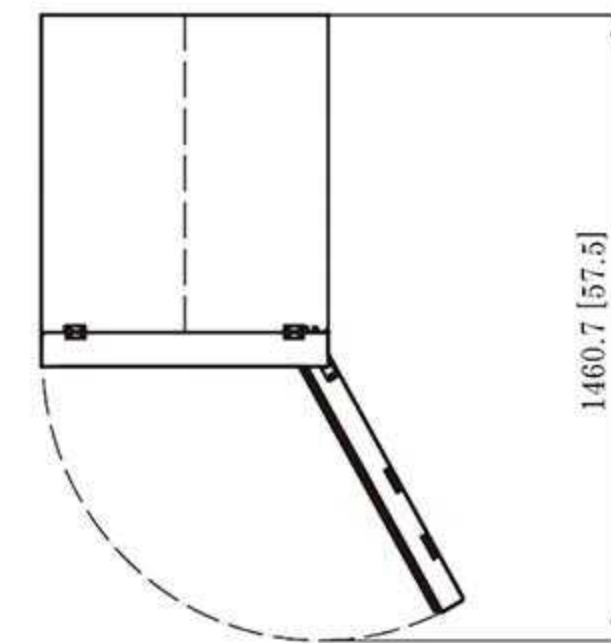

Door open size

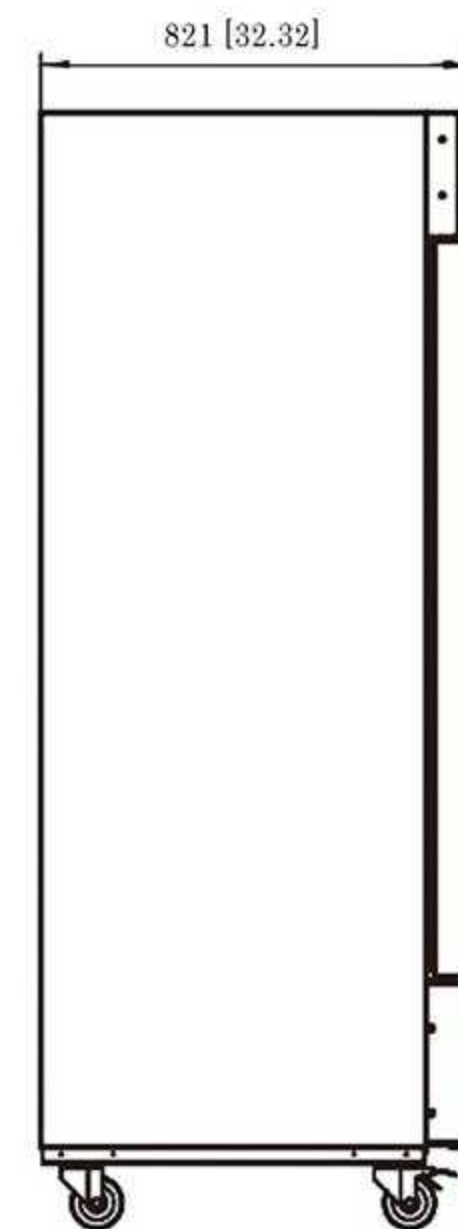


Side view


Model no	Product Dimensions WxDxH (inch)	Inside Dimensions WxDxH (inch)	Net Capacity (Cu.Ft.)	Voltage (V/Hz)	Temperature (°F)	Gross Weight (lb)	40"loading Quantity
GD-23BR	27*32*83.5	22.2*26.8*50.8	21	115/60	+33~+41	282	39
GD-23BF	27*32*83.5	22.2*26.*50.8	21	115/60	-10~+10	298	39



GD-49BR

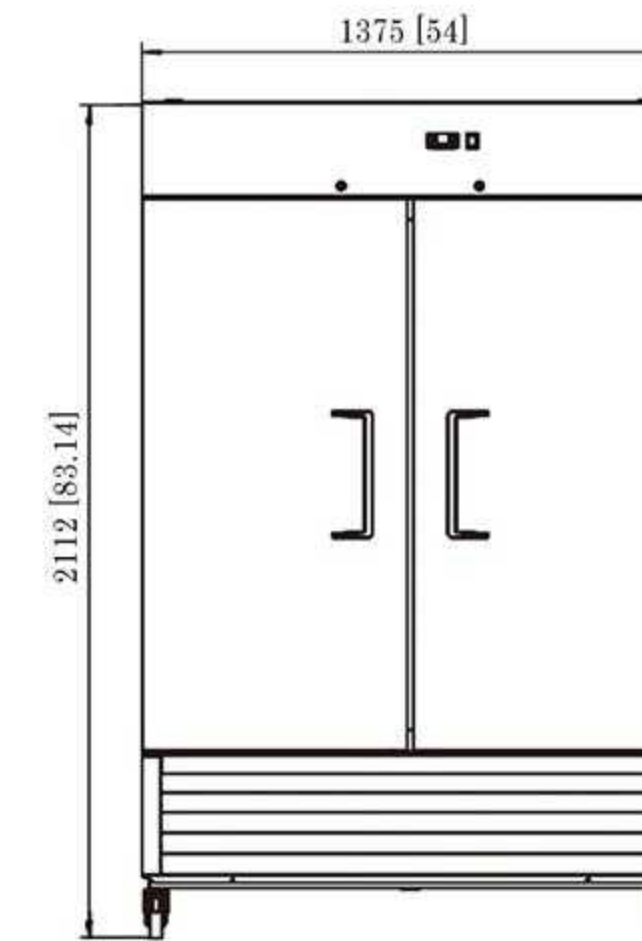


Front view

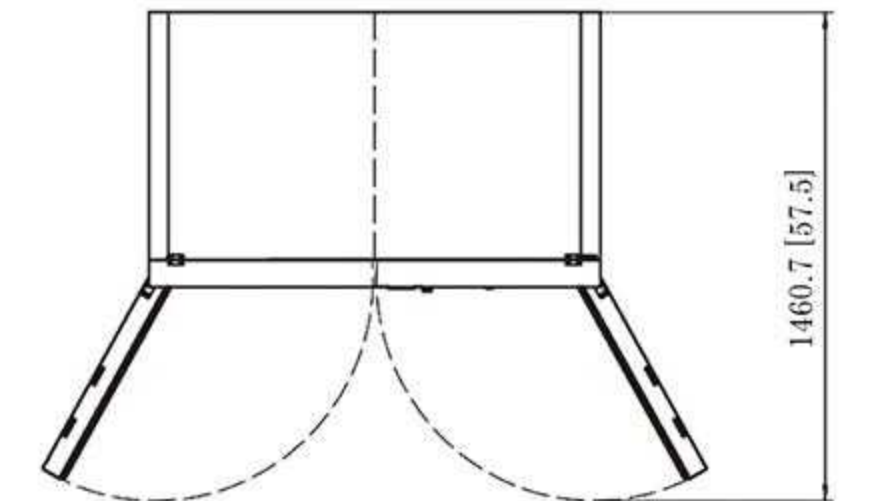


Door open size



GD-72BR

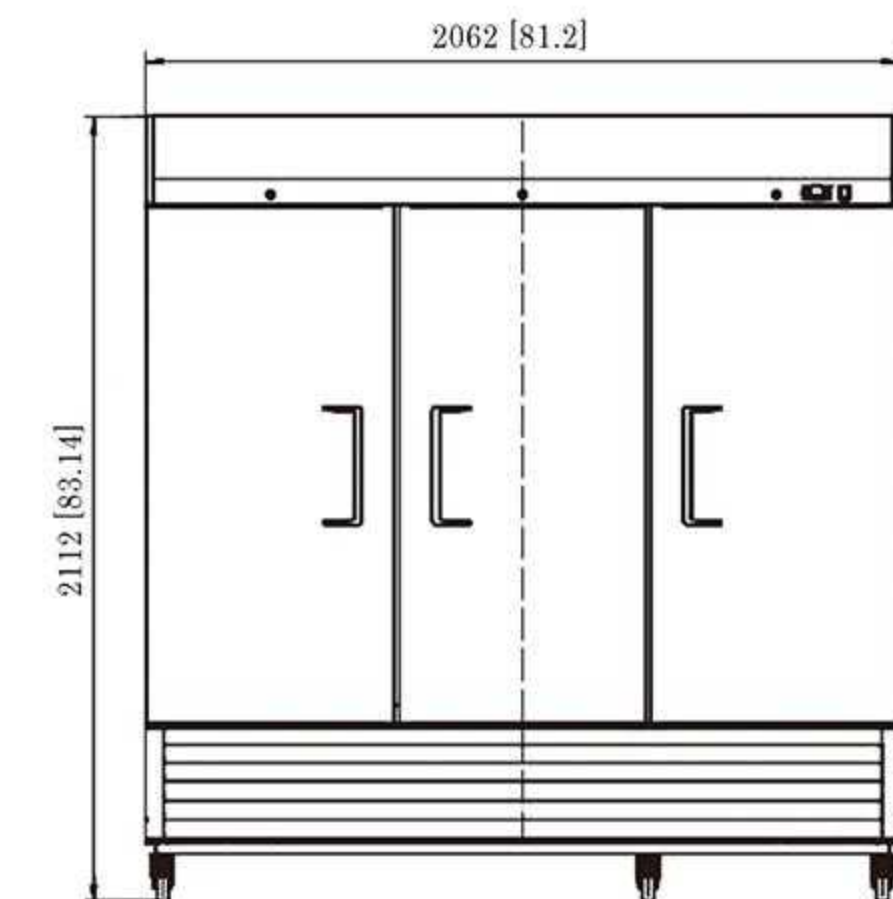

Front view

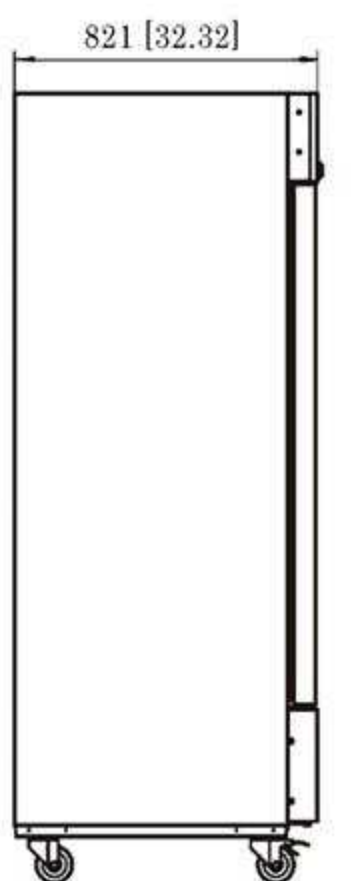

Side view

Model no	Product Dimensions WxDxH (inch)	Inside Dimensions WxDxH (inch)	Net Capacity (Cu.Ft.)	Voltage (V/Hz)	Temperature (°F)	Gross Weight (lb)	40"loading Quantity
GD-49BR	54.1*32*83.5	49.4*26.8*50.8	47	115/60	+33~+41	452	21
GD-49BF	54.1*32*83.5	49.4*26.8*50.8	47	115/60	-10~+10	465	21
GD-72BR	81.2*32.1*83.3	76.5*26.5*60.4	72	115/60	+33~+41	615	13
GD-72BF	81.2*32.1*83.3	76.5*26.5*60.4	72	115/60	-10~+10	628	13



REACH-IN REFRIGERATOR

GLASS DOOR

Standard Features:


- Internal LED light.
- Stainless steel exterior & interior.
- Inner box curved edges for easy cleaning.
- Door lock and key standard for all refrigerators.
- Magnetic door gasket(s) standard for positive door seal.
- Automatically self close door when less than 90° open.
- Refrigerator climate class : N.
- Door handled can be customized.
- Ventilated system, down duct refrigeration to ensure even distribution of air.
- Embraco compressor units with environmentally friendly R290 refrigerant.
- Digital thermostat Italian famous brand Dixell, Carel, Eliwell.

Optional:


- Extra shelves: includes 4 shelf clips per shelf.
- Middle shelf.
- Adjustable feet.



GD-23BRG

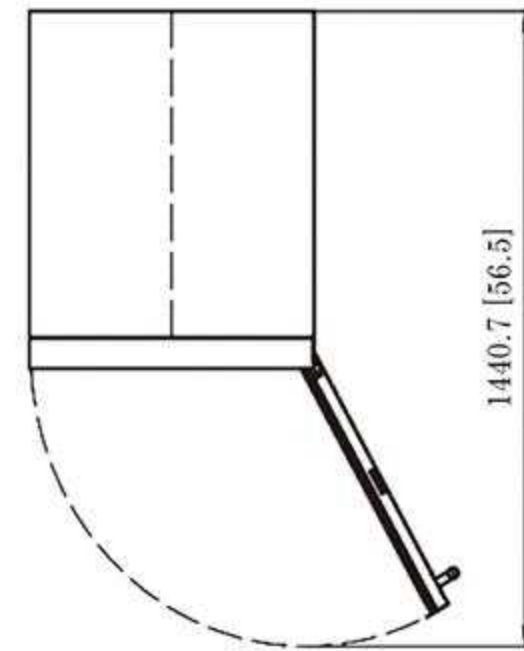

Door open size

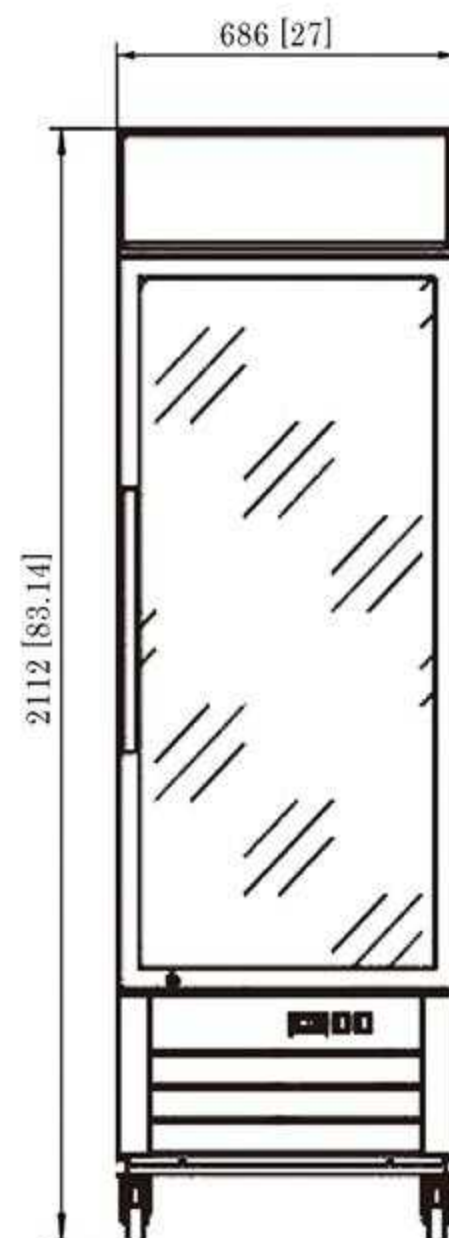

Front view




Side view


Model no	Product Dimensions WxDxH (inch)	Inside Dimensions WxDxH (inch)	Net Capacity (Cu.Ft.)	Voltage (V/Hz)	Temperature (°F)	Gross Weight (lb)	40"loading Quantity
GD-23BRG	27*32*83.5	22.2*26.8*50.8	21	115/60	+33~+41	382	39
GD-23BFG	27*32*83.5	22.2*26.*50.8	21	115/60	-10~+10	398	39



GD-49BRG

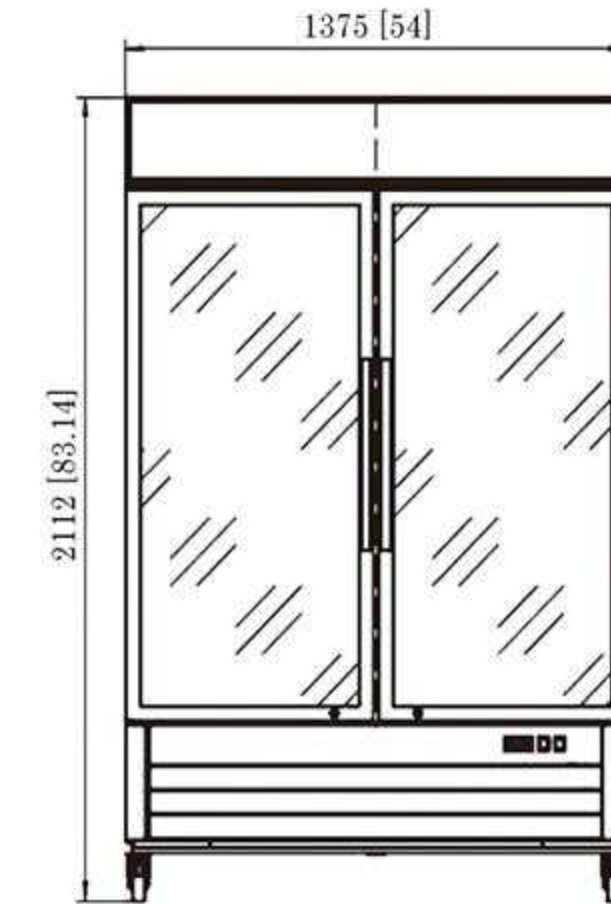


Front view

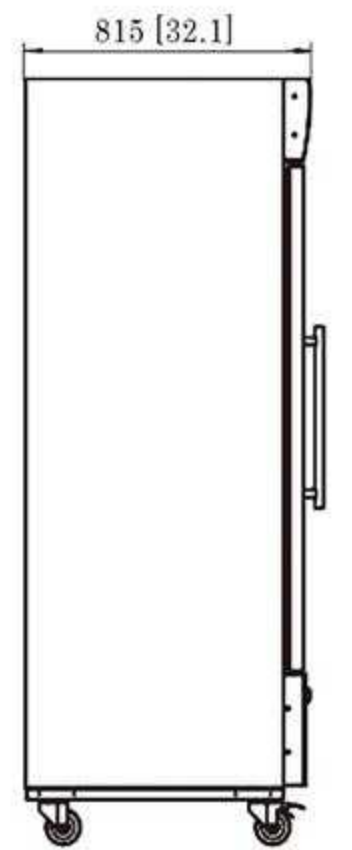


Side view



GD-72BRG

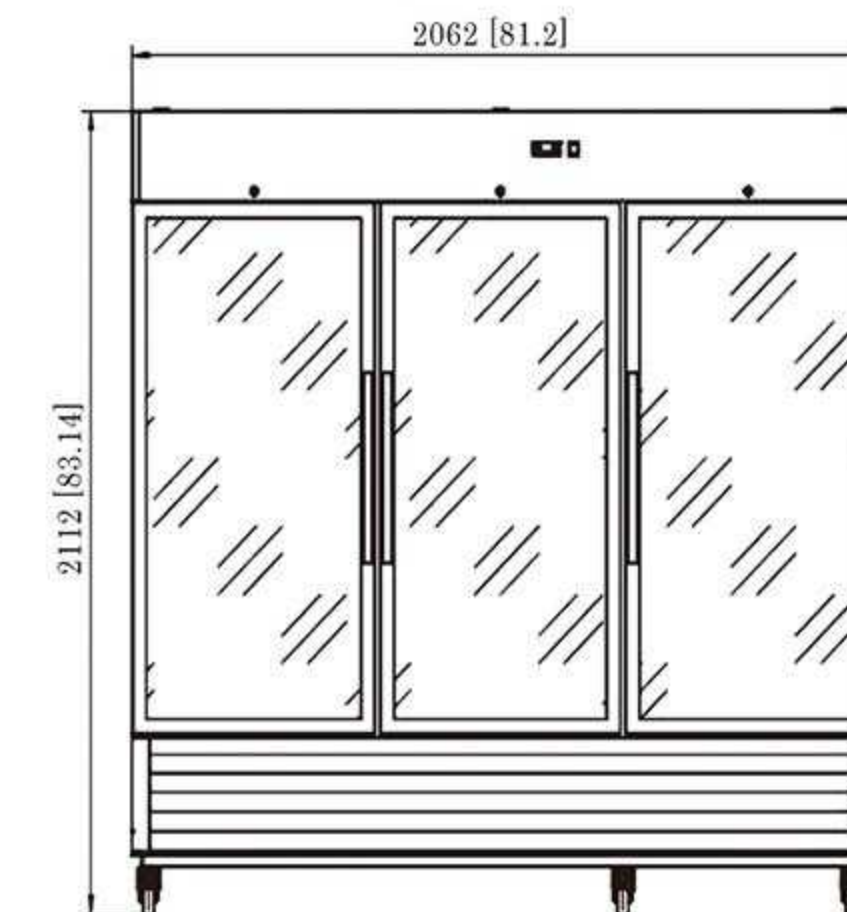

Front view

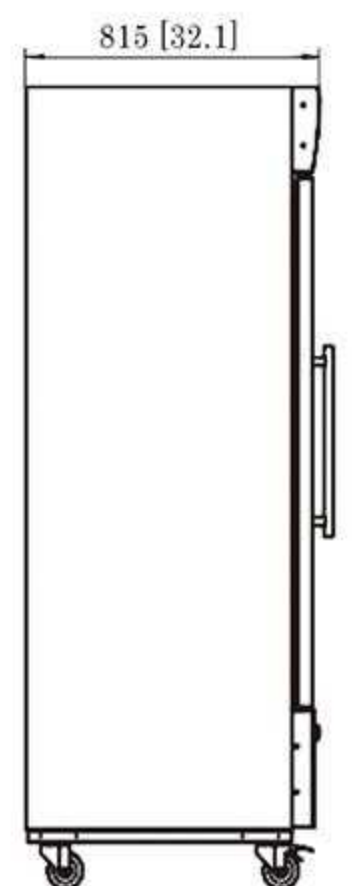

Side view



Model no	Product Dimensions WxDxH (inch)	Inside Dimensions WxDxH (inch)	Net Capacity (Cu.Ft.)	Voltage (V/Hz)	Temperature (°F)	Gross Weight (lb)	40"loading Quantity
GD-49BRG	54.1*32*83.5	49.4*26.8*50.8	47	115/60	+33~+41	626	21
GD-49BFG	54.1*32*83.5	49.4*26.8*50.8	47	115/60	-10~+10	642	21
GD-72BRG	81.2*32.1*83.3	76.5*26.5*60.4	72	115/60	+33~+41	937	13
GD-72BFG	81.2*32.1*83.3	76.5*26.5*60.4	72	115/60	-10~+10	953	13

UNDER COUNTER



SOLID DOOR

Standard Features:



- Stainless steel interior and exterior, Floors and rounded cabinet corners for easy cleaning.
- Door lock and key standard for all refrigerators , door handle can be customized.
- Includes 1 adjustable and removable wire shelf per section,heavy duty shelves.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Reversible doors and automatically self close when less than 90°open.
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools.
- Ventilated system, down duct refrigeration to ensure even distribution of air.
- Embraco compressor units with environmentally friendly R290 refrigerant.

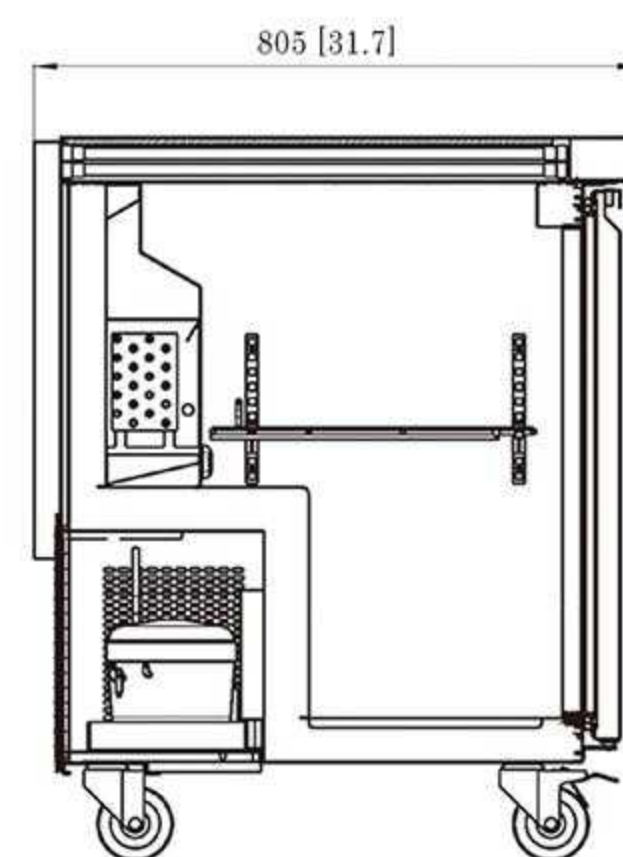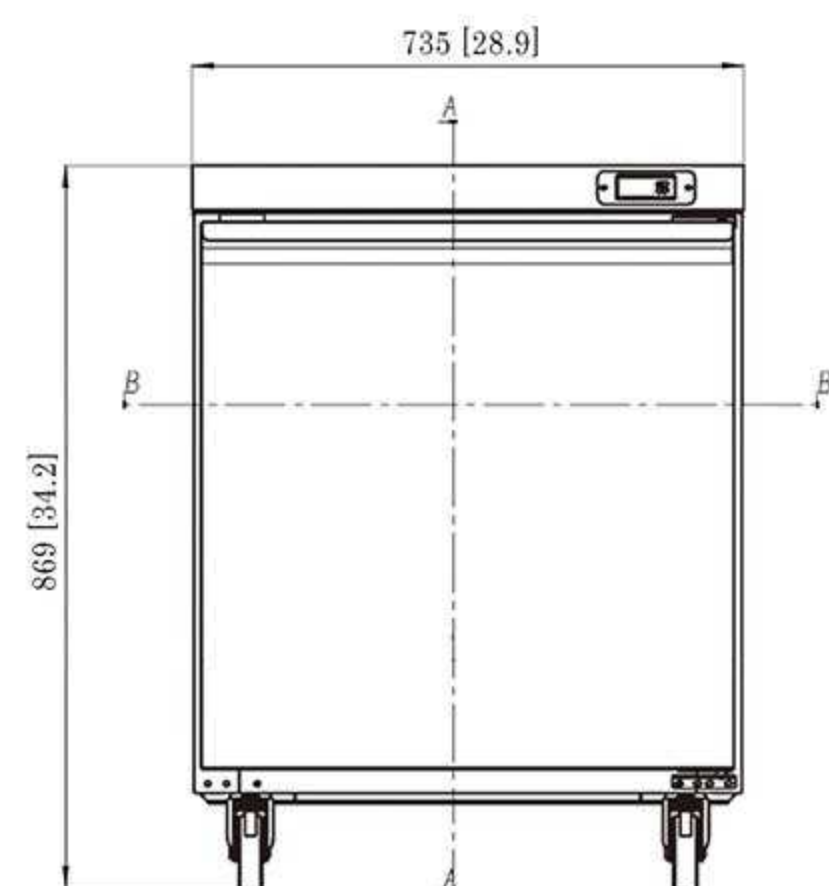



TUC-29R

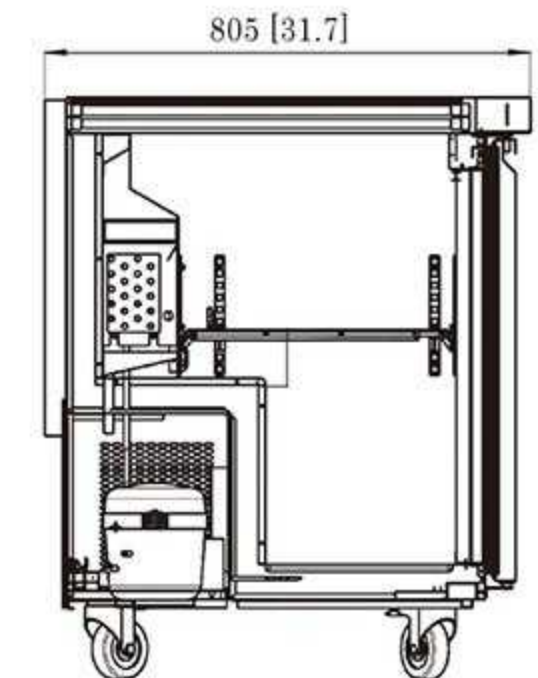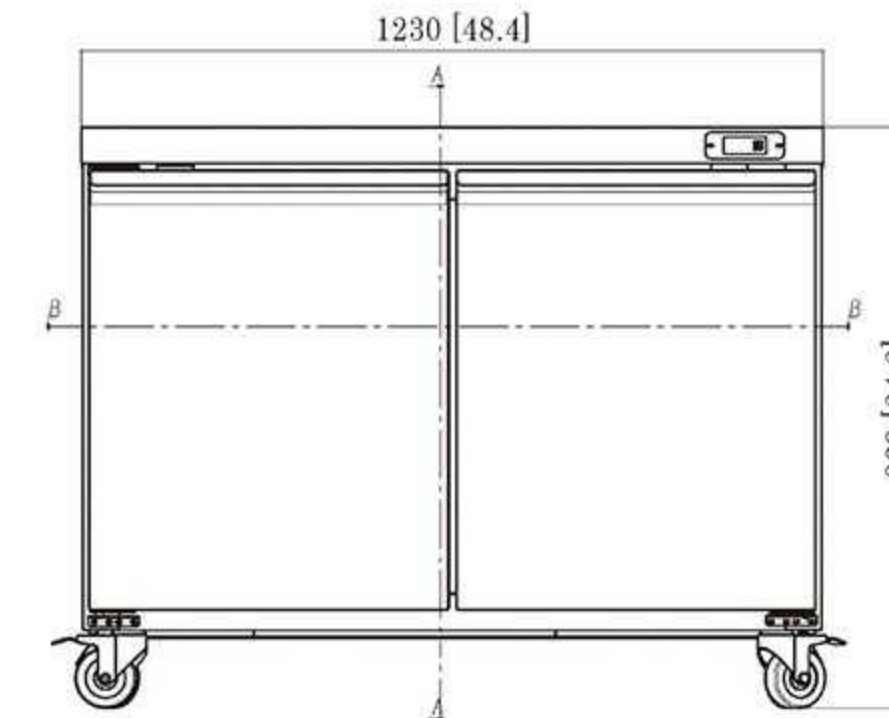

TUC-48R

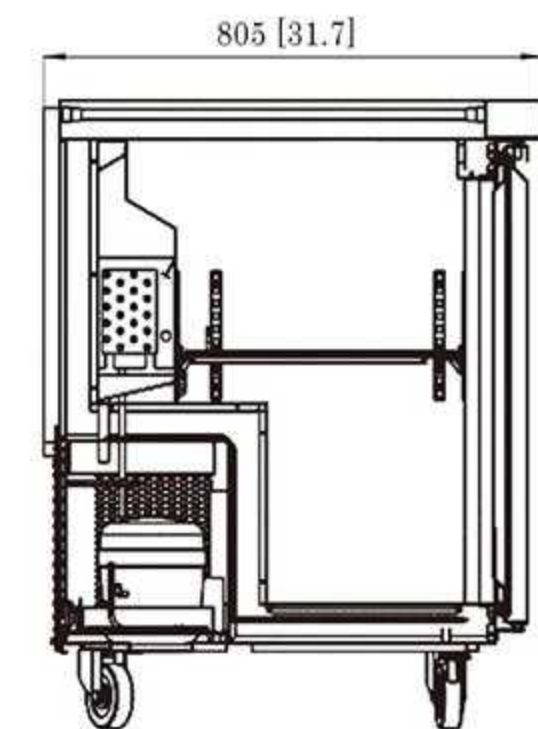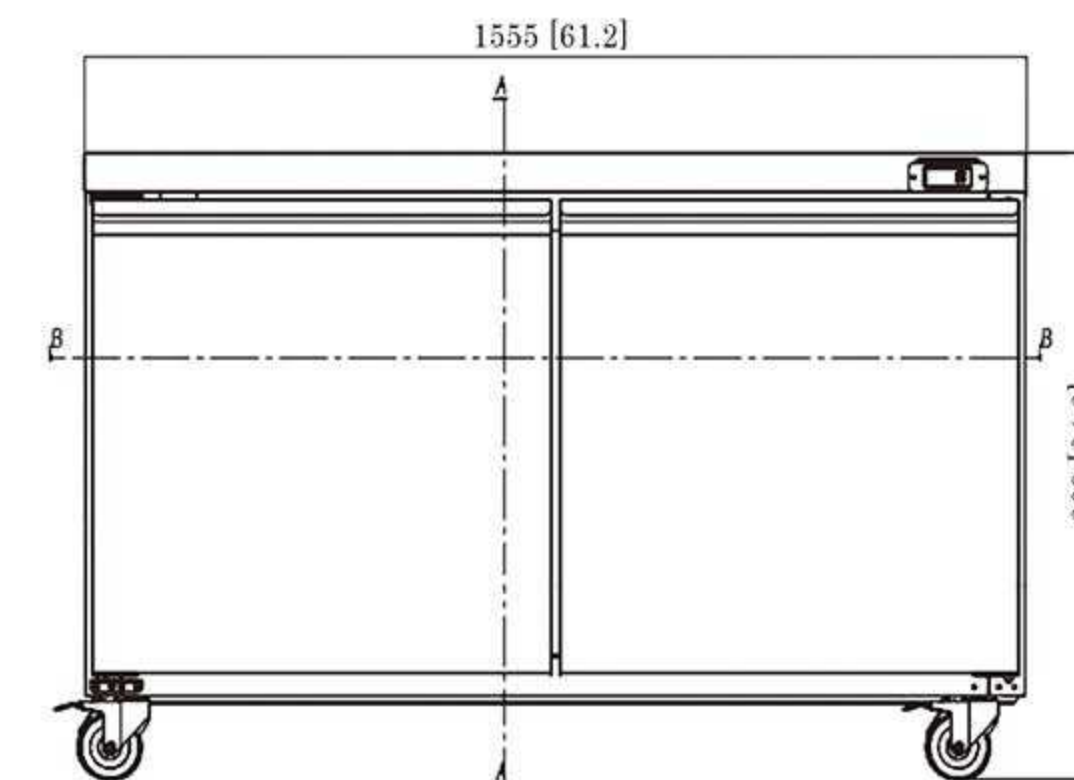

TUC-60R

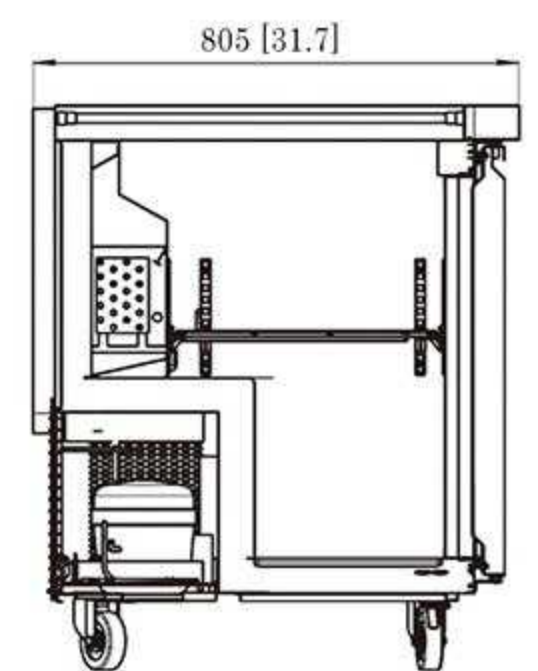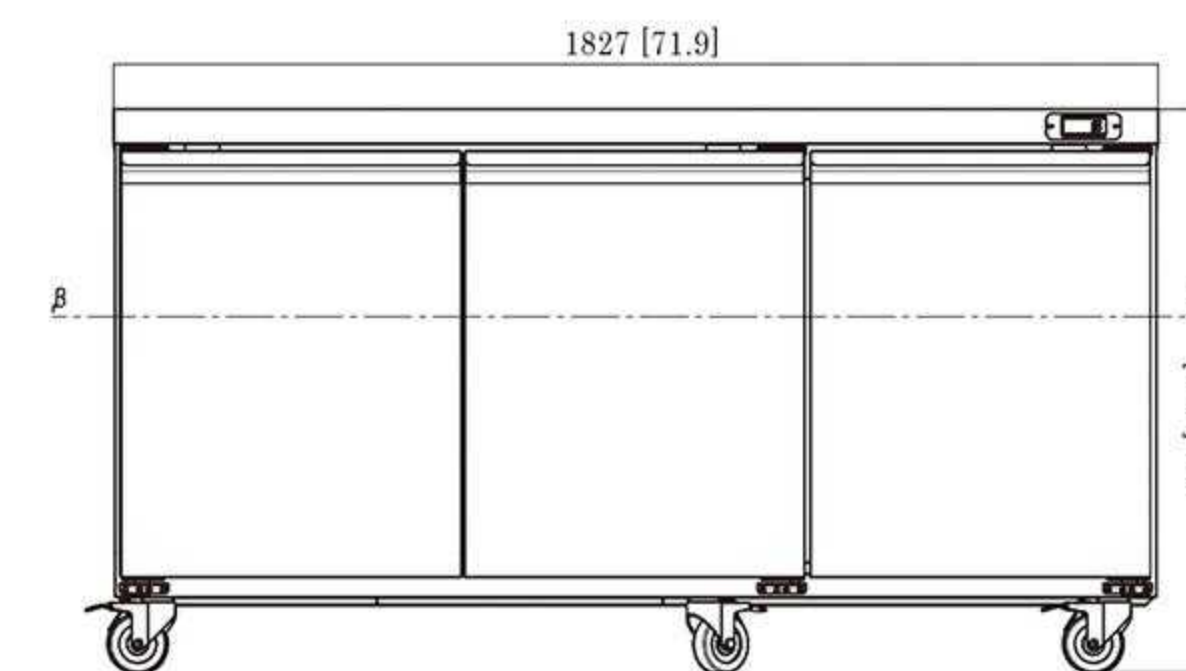

TUC-72R

Model no	Product Dimensions WxDxH (inch)	Net Capacity (Cu.Ft.)	Voltage (V/Hz)	Temperature (°F)	Doors	Gross Weight (lb)	40"loading Quantity
TUC-29R	29*31.7*34.2	6.7	115/60	+33~+41	1	172	60
TUC-48R	48*31.7*34.2	11.1	115/60	+33~+41	2	231	44
TUC-60R	61*31.7*34.2	14.1	115/60	+33~+41	2	265	28
TUC-72R	72*31.7*34.2	16.6	115/60	+33~+41	3	315	26

Model no	Product Dimensions WxDxH (inch)	Net Capacity (Cu.Ft.)	Voltage (V/Hz)	Temperature (°F)	Doors	Gross Weight (lb)	40"loading Quantity
TUC-29F	29*31.7*34.2	6.7	115/60	-10~+10	1	179	60
TUC-48F	48*31.7*34.2	11.1	115/60	-10~+10	2	245	44
TUC-60F	61*31.7*34.2	14.1	115/60	-10~+10	2	280	28
TUC-72F	72*31.7*34.2	16.6	115/60	-10~+10	3	330	26



PIZZA PREP TABLE


SOLID DOOR

Standard Features:


- American fanshionable style Pizza table.
- Stainless steel interior and exterior.
- Reversible doors and automatically self close when less than 90°open.
- Inner box curved edges for easy cleaning.
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools.
- Door lock and key standard for all refrigerators , door handle can be customized.
- Digital thermostat Italian famous brand Dixell,Carel,Eliwell.
- High quality famous compressor: Embraco.

Optional:


- Fans: Germany Well-known brand EBM fans.
- Automatic defrost cooling system.
- Adjustable stainless steel feet or lockable casters.

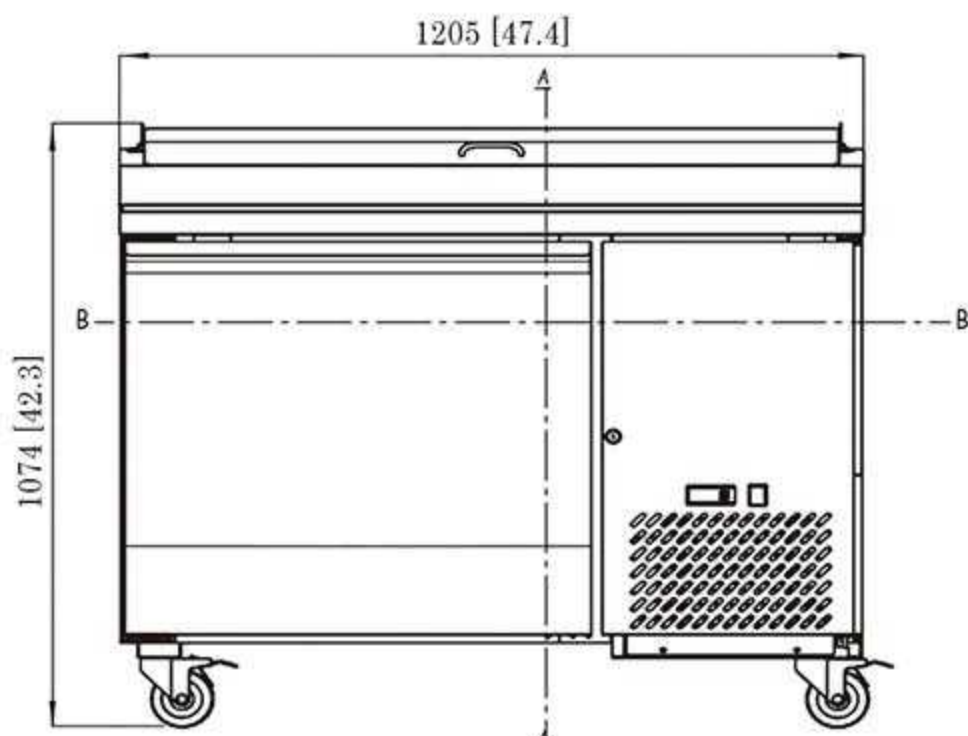


Front view

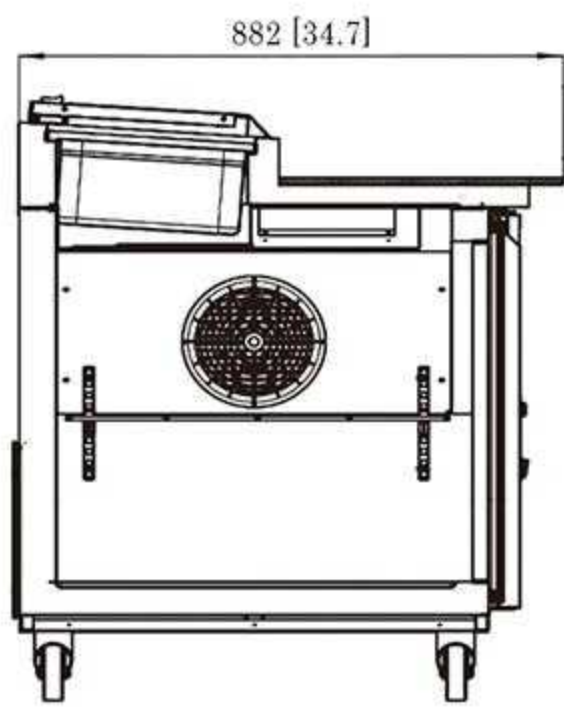

Side view




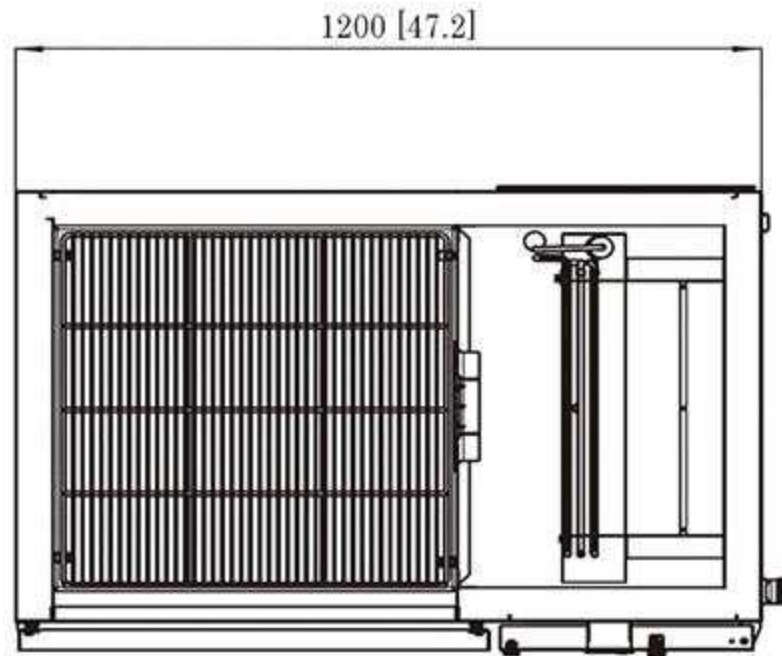


Back view




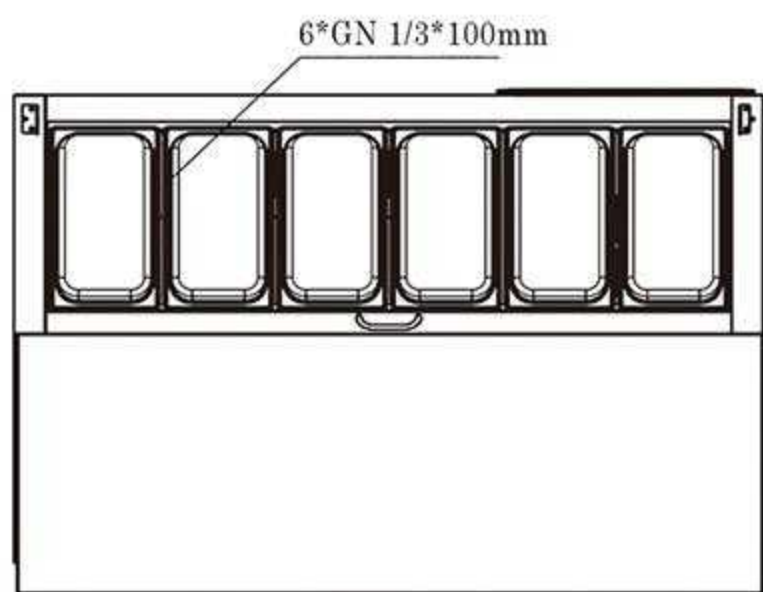


Top view

TPP-47

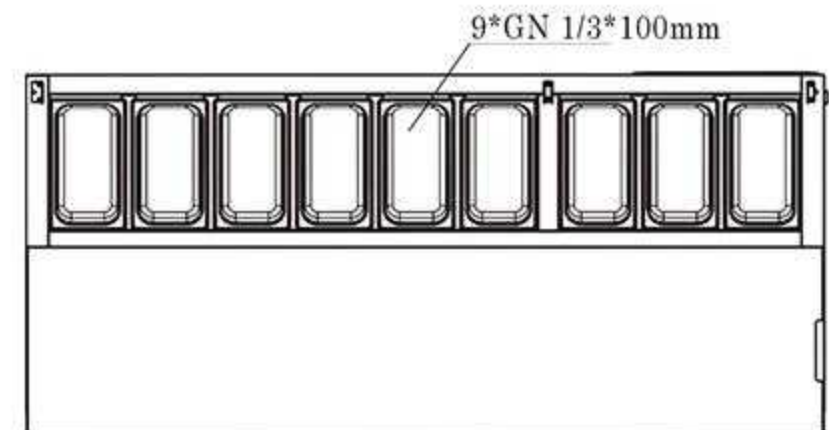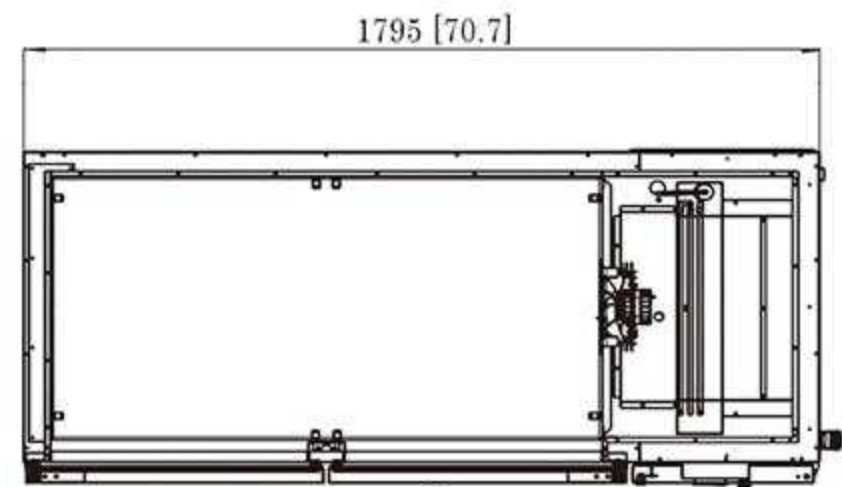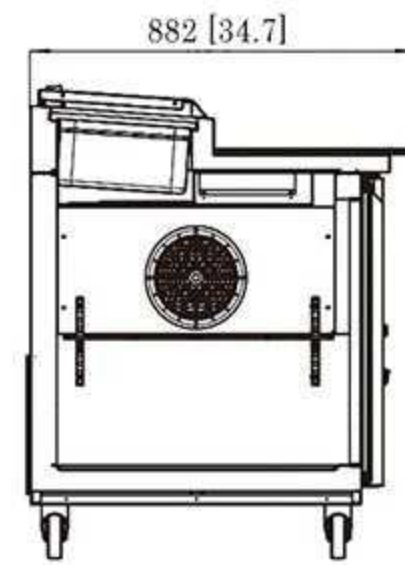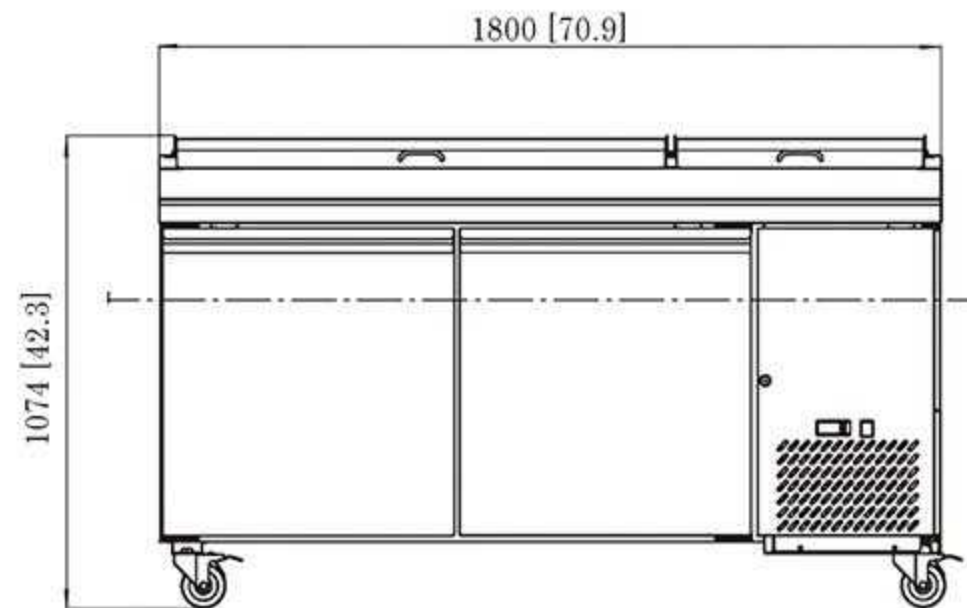

TPP-67

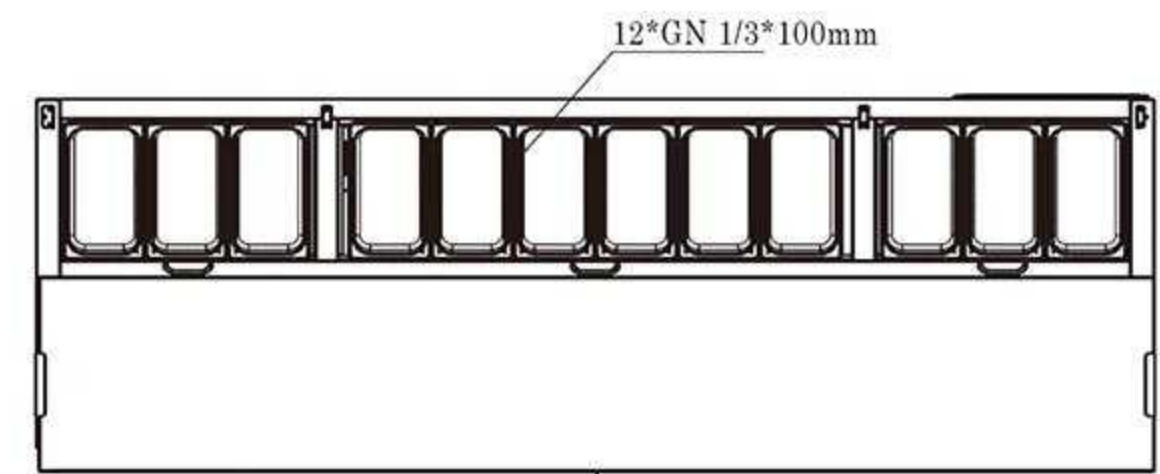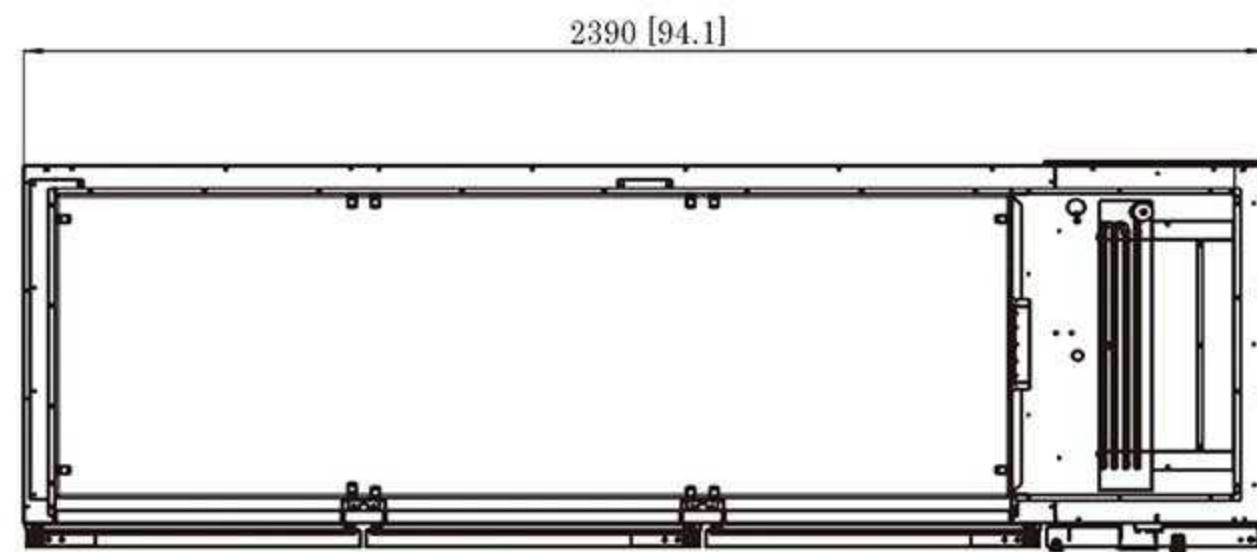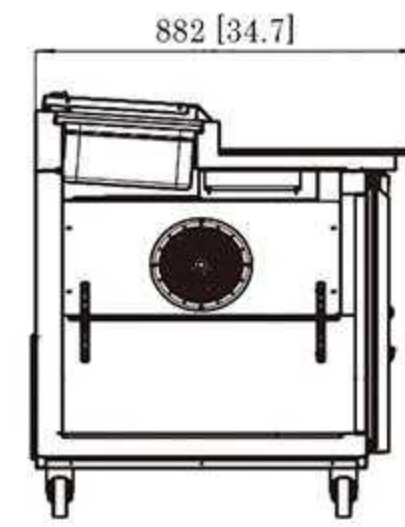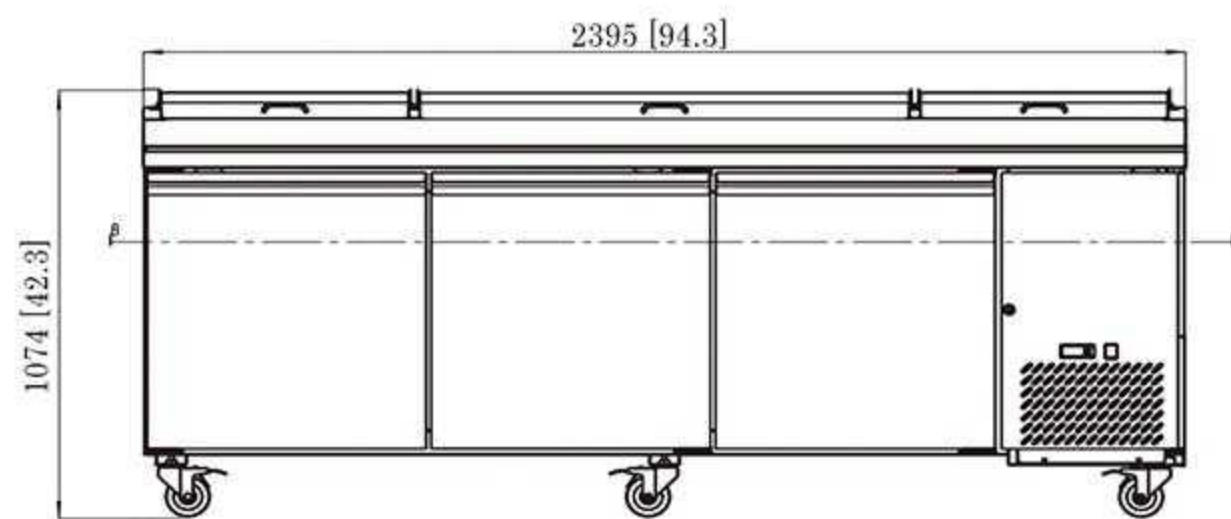

TPP-94

Model no	Product Dimensions WxDxH (inch)	Net Capacity (Cu.Ft.)	Voltage (V/Hz)	Temperature (°F)	Doors	Gross Weight (lb)	40"loading Quantity
TPP-47	47.4*34.7*42.3	10.95	115/60	+33~+41	1	295	42
TPP-67	70.9*34.7*42.3	20.91	115/60	+33~+41	2	406	24
TPP-94	94.3*34.7*42.3	30.87	115/60	+33~+41	3	527	16

SALAD PREP TABLE



SOLID DOOR

Standard Features:




- American fanstyleable style Saladette.
- Stainless steel interior and exterior.
- Automatically self close when less than 90° open.
- Inner box curved edges for easy cleaning.
- Magnetic sealing strip keeps the cold air inside. Easy to remove without use of tools.
- Door lock and key standard for all refrigerators , door handle can be customized.
- Digital thermostat Italian famous brand Dixell,Carel,Eliwell.
- High quality famous compressor: Embraco.

Optional:




- Fans: Germany Well-known brand EBM fans.
- Automatic defrost cooling system.
- Adjustable stainless steel feet or lockable casters.

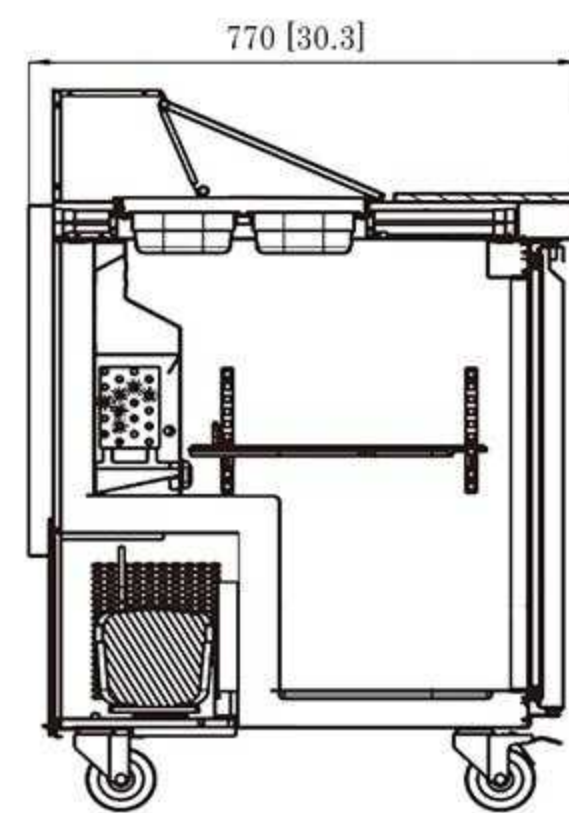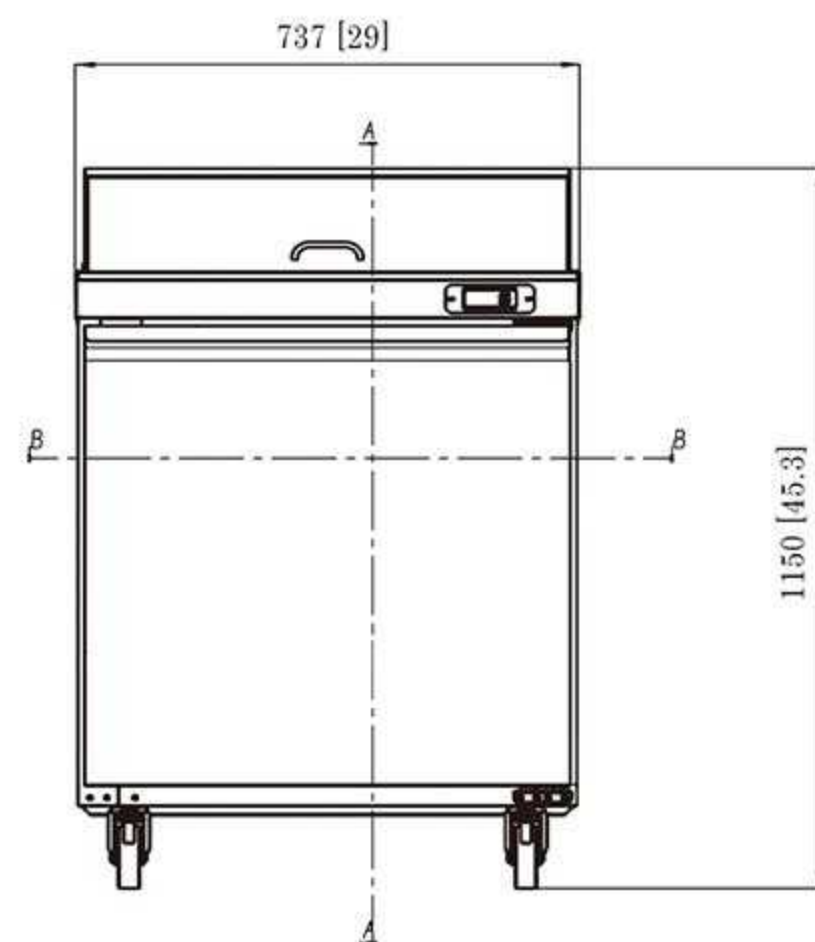




TSSU-29

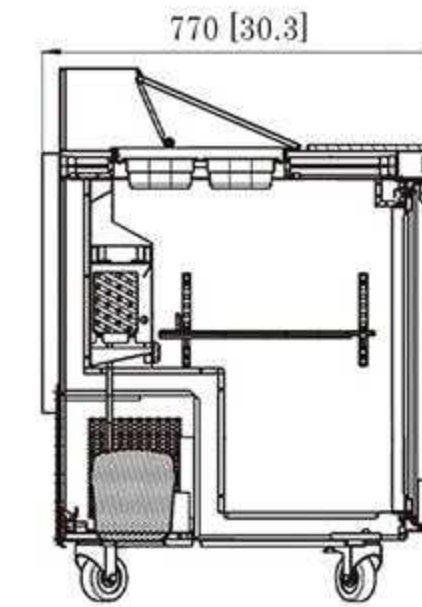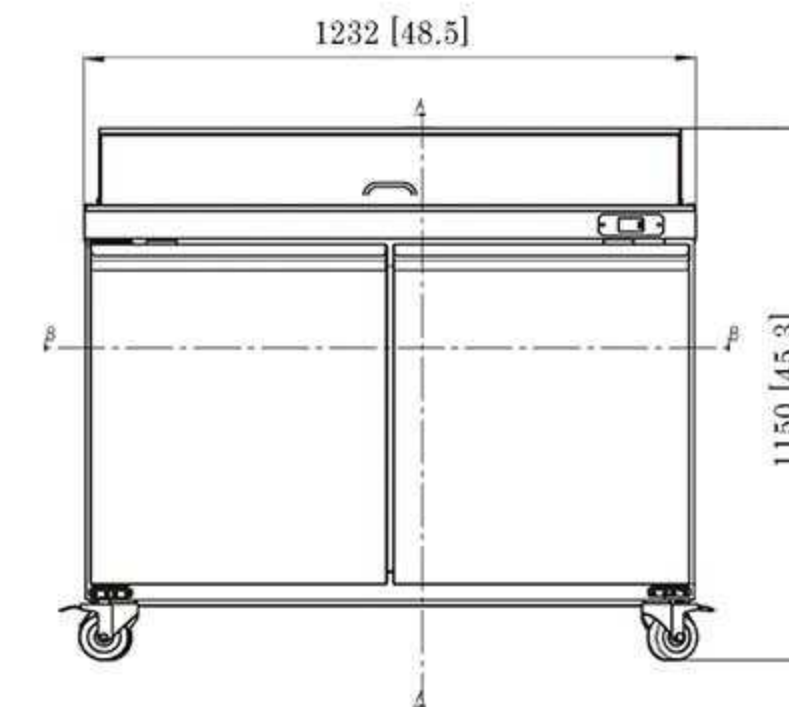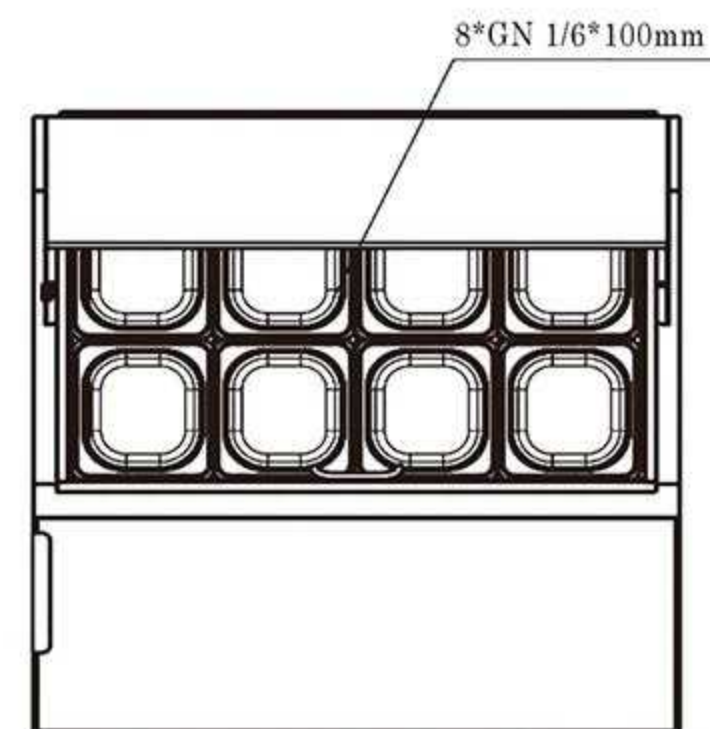


TSSU-48

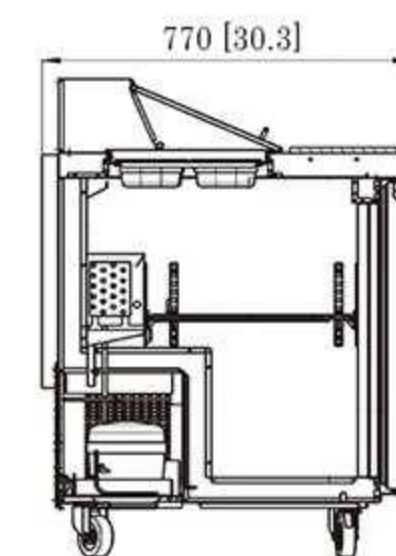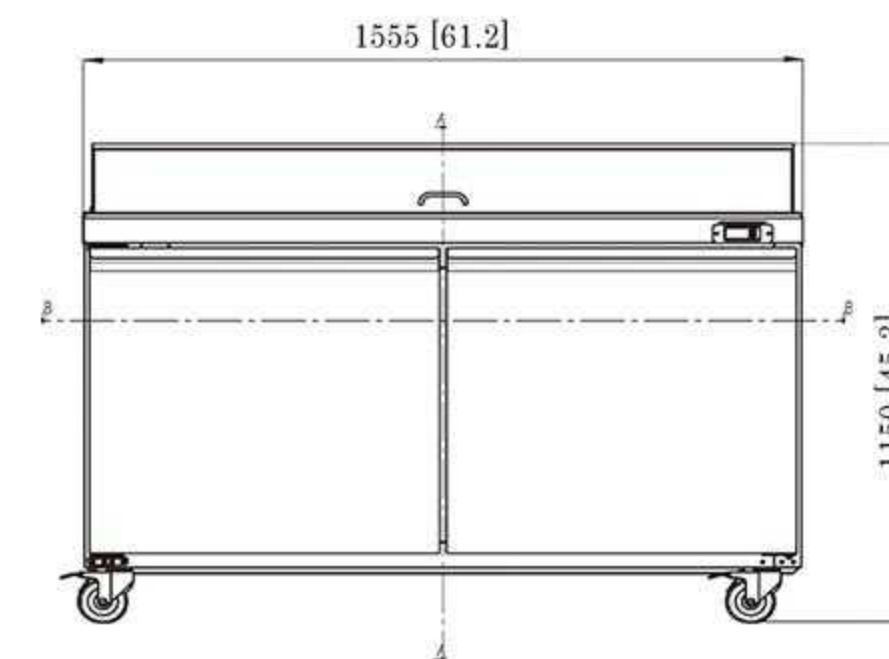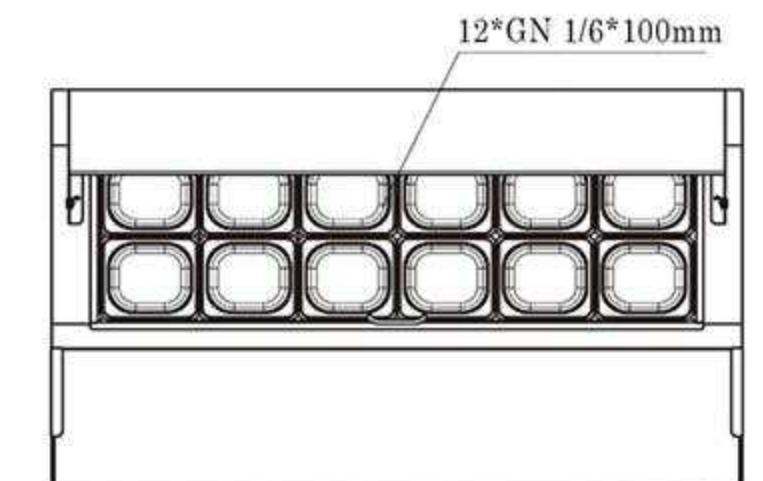

TSSU-60

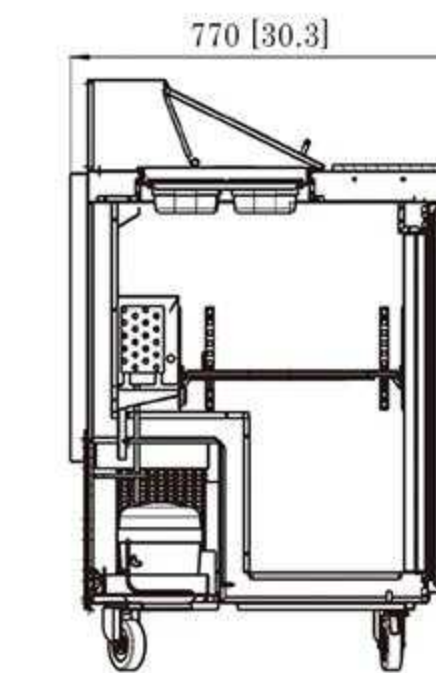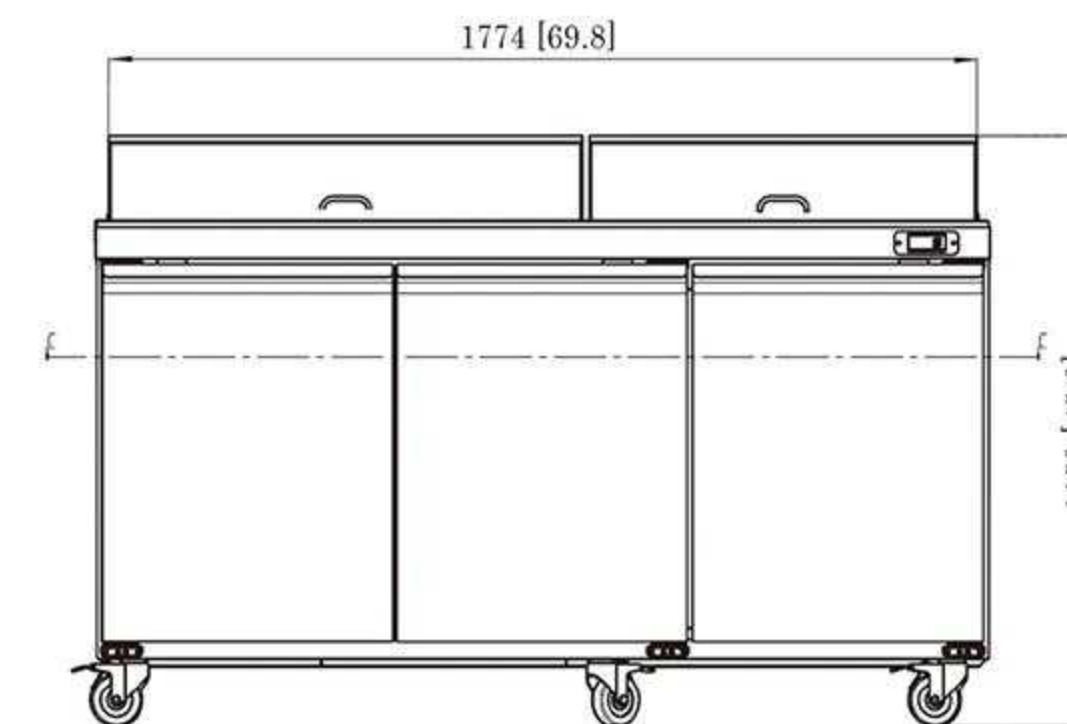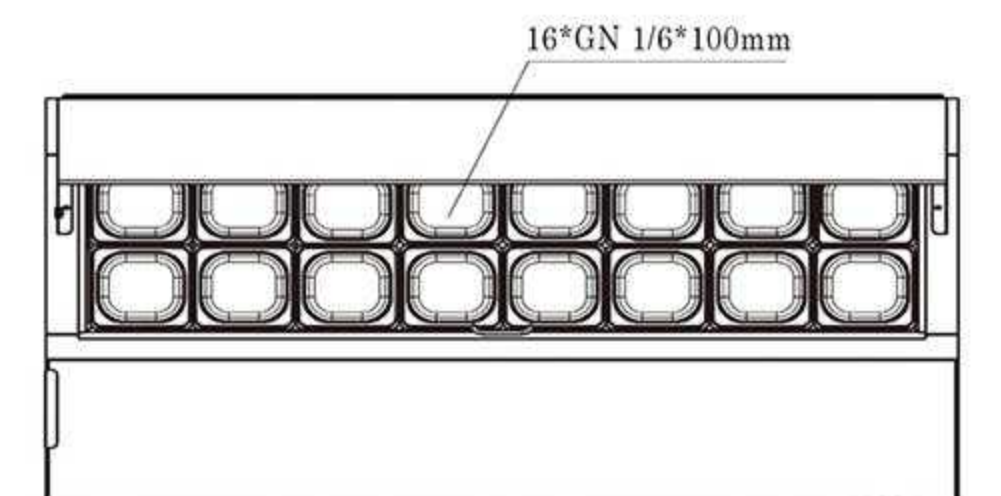

TSSU-72

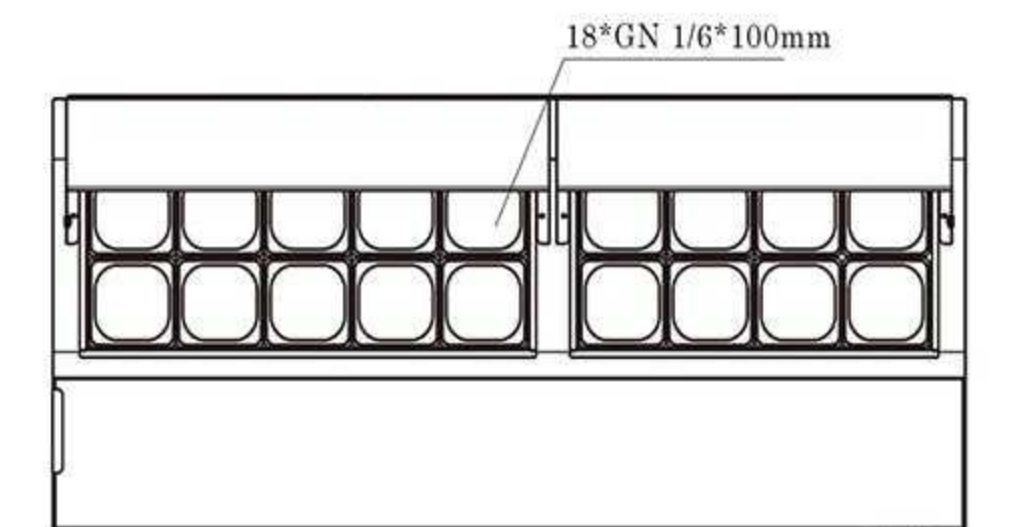


Model no	Product Dimensions WxDxH (inch)	Net Capacity (Cu.Ft.)	Voltage (V/Hz)	Temperature (°F)	Doors	Gross Weight (lb)	40"loading Quantity
TSSU-29	29*30.3*45.3	7.59	115/60	+33~+41	1	196	60
TSSU-48	48.5*30.3*45.3	13.77	115/60	+33~+41	2	276	44
TSSU-60	61.2*30.3*45.3	17.83	115/60	+33~+41	2	320	28
TSSU-72	69.8*30.3*45.3	21.22	115/60	+33~+41	3	379	26





MEGA TOP SANDWICH PREP TABLE

Standard Features:



- Stainless steel exterior & interior.
- Dixell / Carel digital controller.
- 10" cutting board.
- Automatically slef close when less than 90° open.
- Magnetic door gaskets standard for door seal.
- One pre-installed shelf per section.

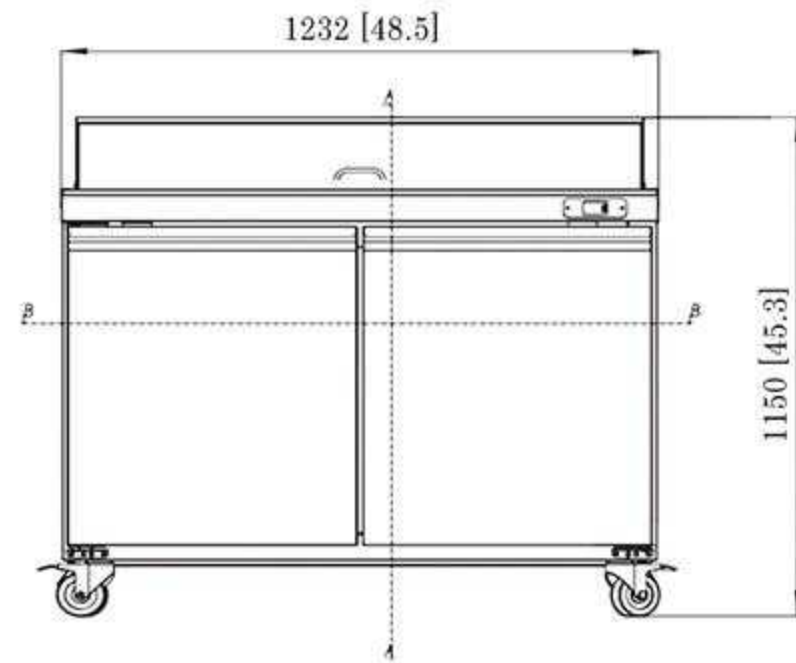



TSSU-40MT

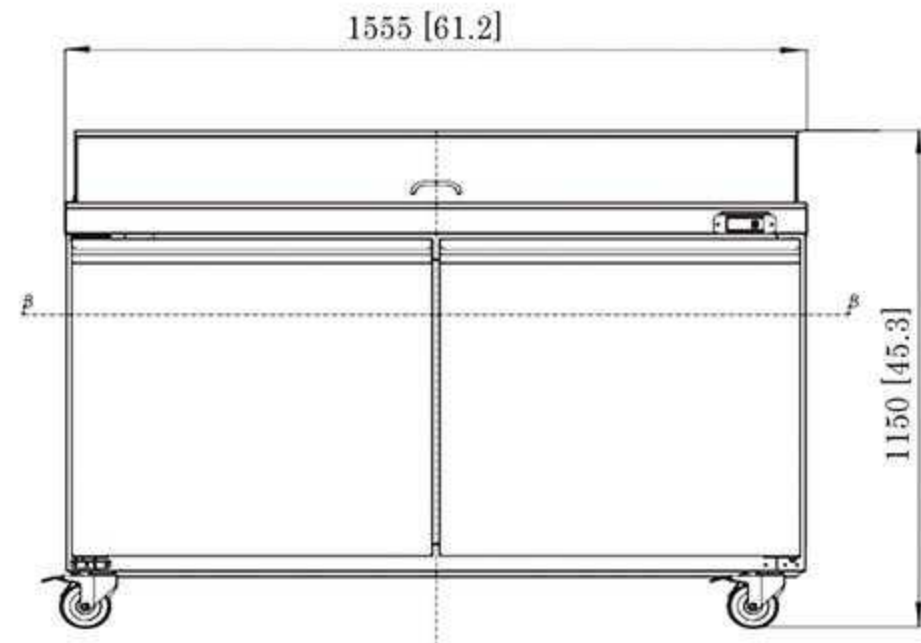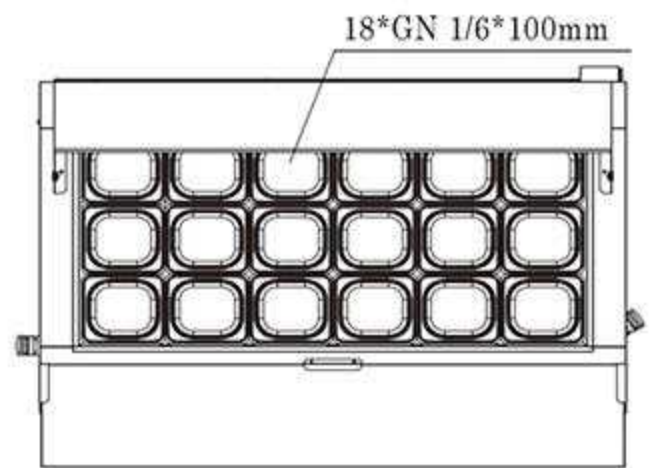



TSSU-60MT

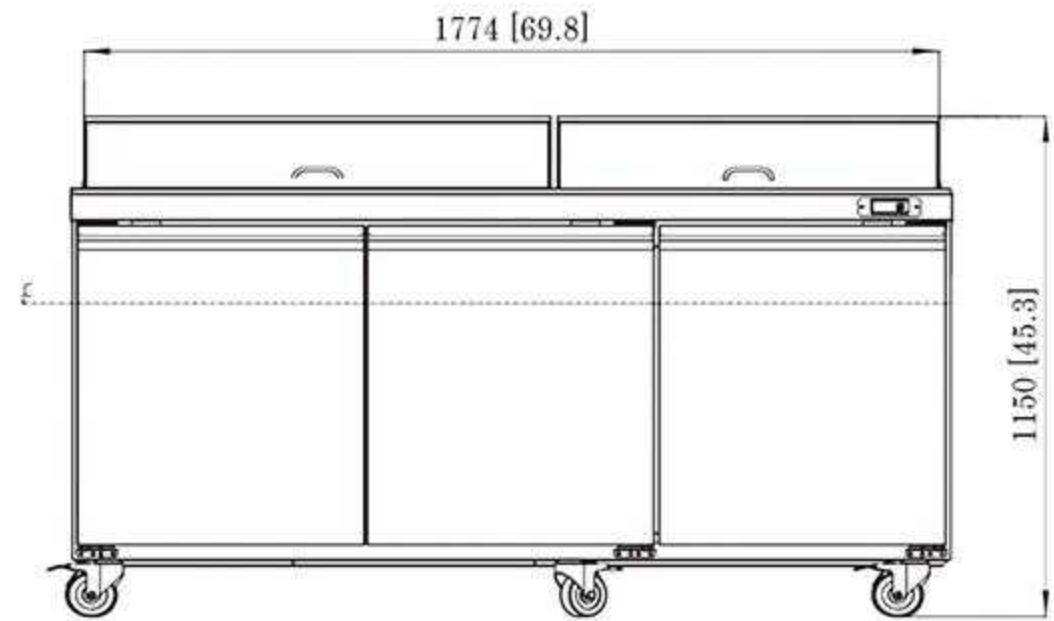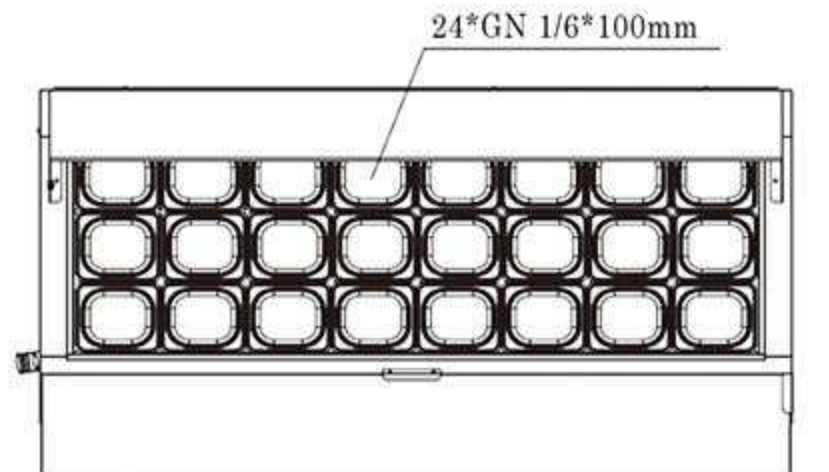

TSSU-72MT

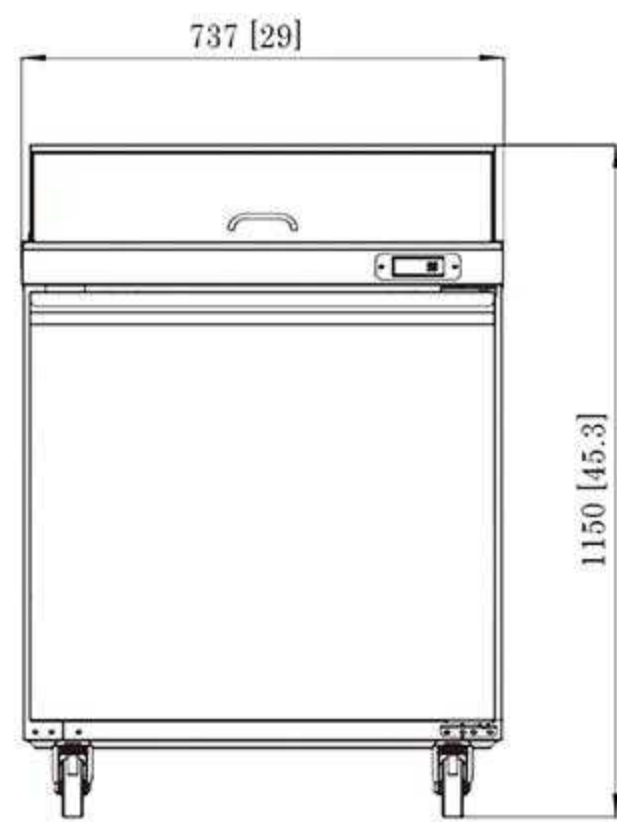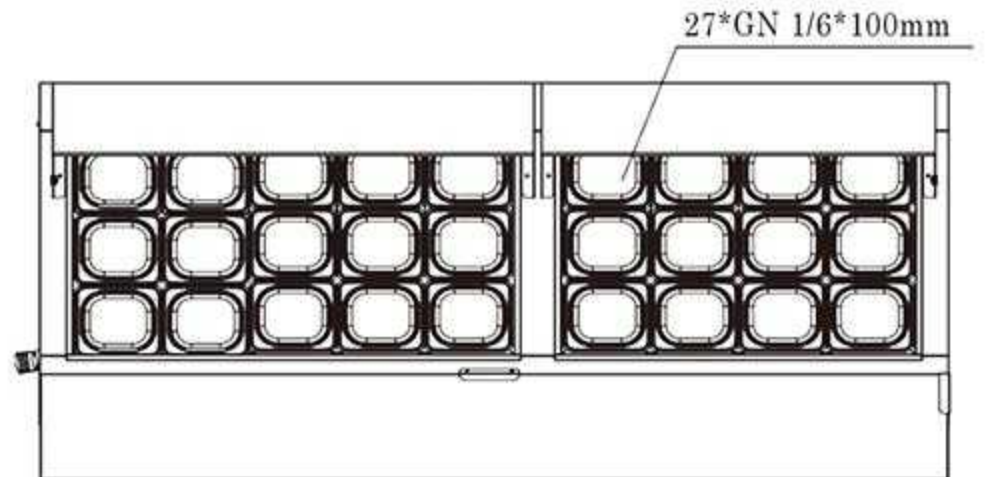

TSSU-29MT

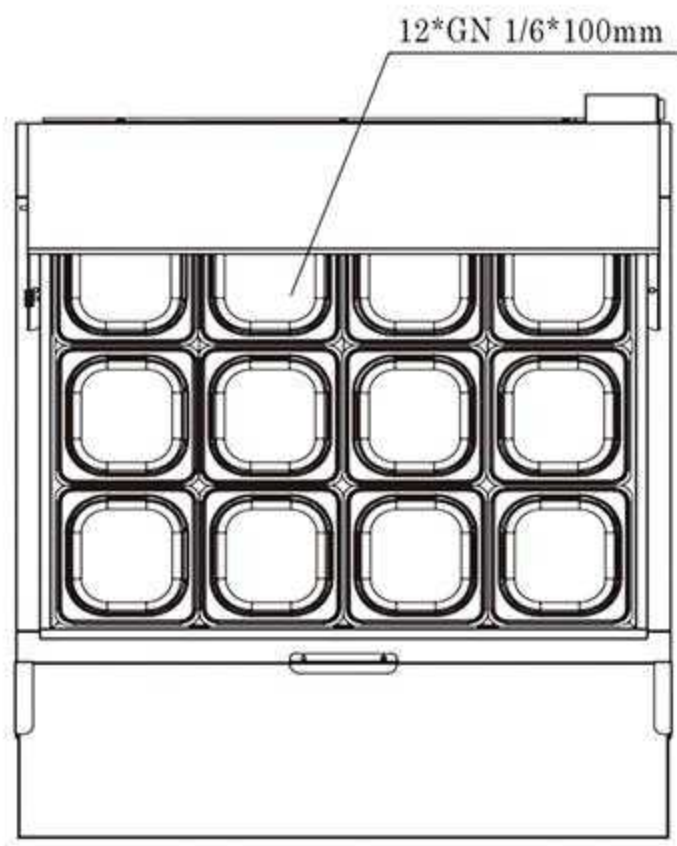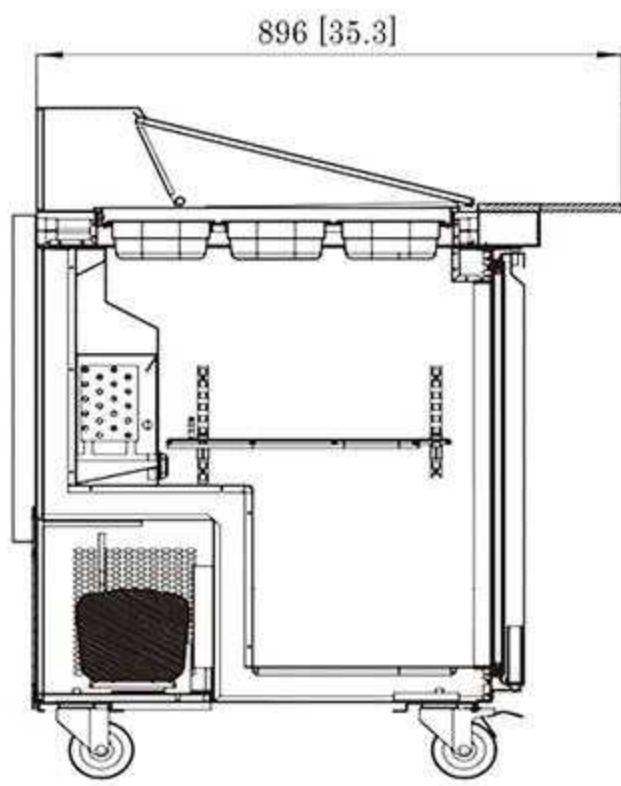

Model no	Product Dimensions WxDxH (inch)	Net Capacity (Cu.Ft.)	Voltage (V/Hz)	Temperature (°F)	Doors	Gross Weight (lb)	40"loading Quantity
TSSU-29MT	29*35.3*45.3	7.59	115/60	+33~+41	1	207	60
TSSU-48MT	48.5*35.3*45.3	13.77	115/60	+33~+41	2	288	44
TSSU-60MT	61.2*35.3*45.3	17.83	115/60	+33~+41	2	333	28
TSSU-72MT	69.8*35.3*45.3	21.22	115/60	+33~+41	3	393	26

CHEF BASES



Standard Features:

- Stainless steel exterior and interior.
- Carel digital controller.
- Heavy duty embraco controller with environmentally friendly R290 refrigerant.
- Maintains temperatures between 32°F - 41°F.
- Heavy duty stainless steel drawer slides and rollers.
- Magnetic drawer gaskets.
- Recessed door handles.
- Pre-installed casters.
- Gravity fed self closing drawers.
- Step design on the counter-top.

Optional:

- Stainless steel pan or PC pan.



Model no	Dimensions (inch)	Net capacity (L)	Temperature (°F)	Compressor	Thermostat	Coolant	40"loading Quantity
CB36TN	36.2*32.3*27	72	32~41	Embraco	Carel	R290	78
CB52TN	52.8*32.3*27	131	32~41	Embraco	Carel	R290	48
CB72TN	72.2*32.3*27	178	32~41	Embraco	Carel	R290	39



REFRIGERATED TOPPING UNIT




Standard Features:

- Exterior and interior material: stainless steel.
- Zanussi high quality compressor.
- Suitable for GN 1/6 pans.
- CFC free foaming.
- R600a/ R134a coolant.



RTR-6

Model no	Dimensions (inch)	Net capacity (L)	Temperature (°F)	Compressor	40"loading Quantity
RTR-4	14.9*25.8*9.3	GN1/6 x 4	32~41	Zel	560
RTR-6	34*16*8.3	GN1/6 x 6	32~41	Zel	448

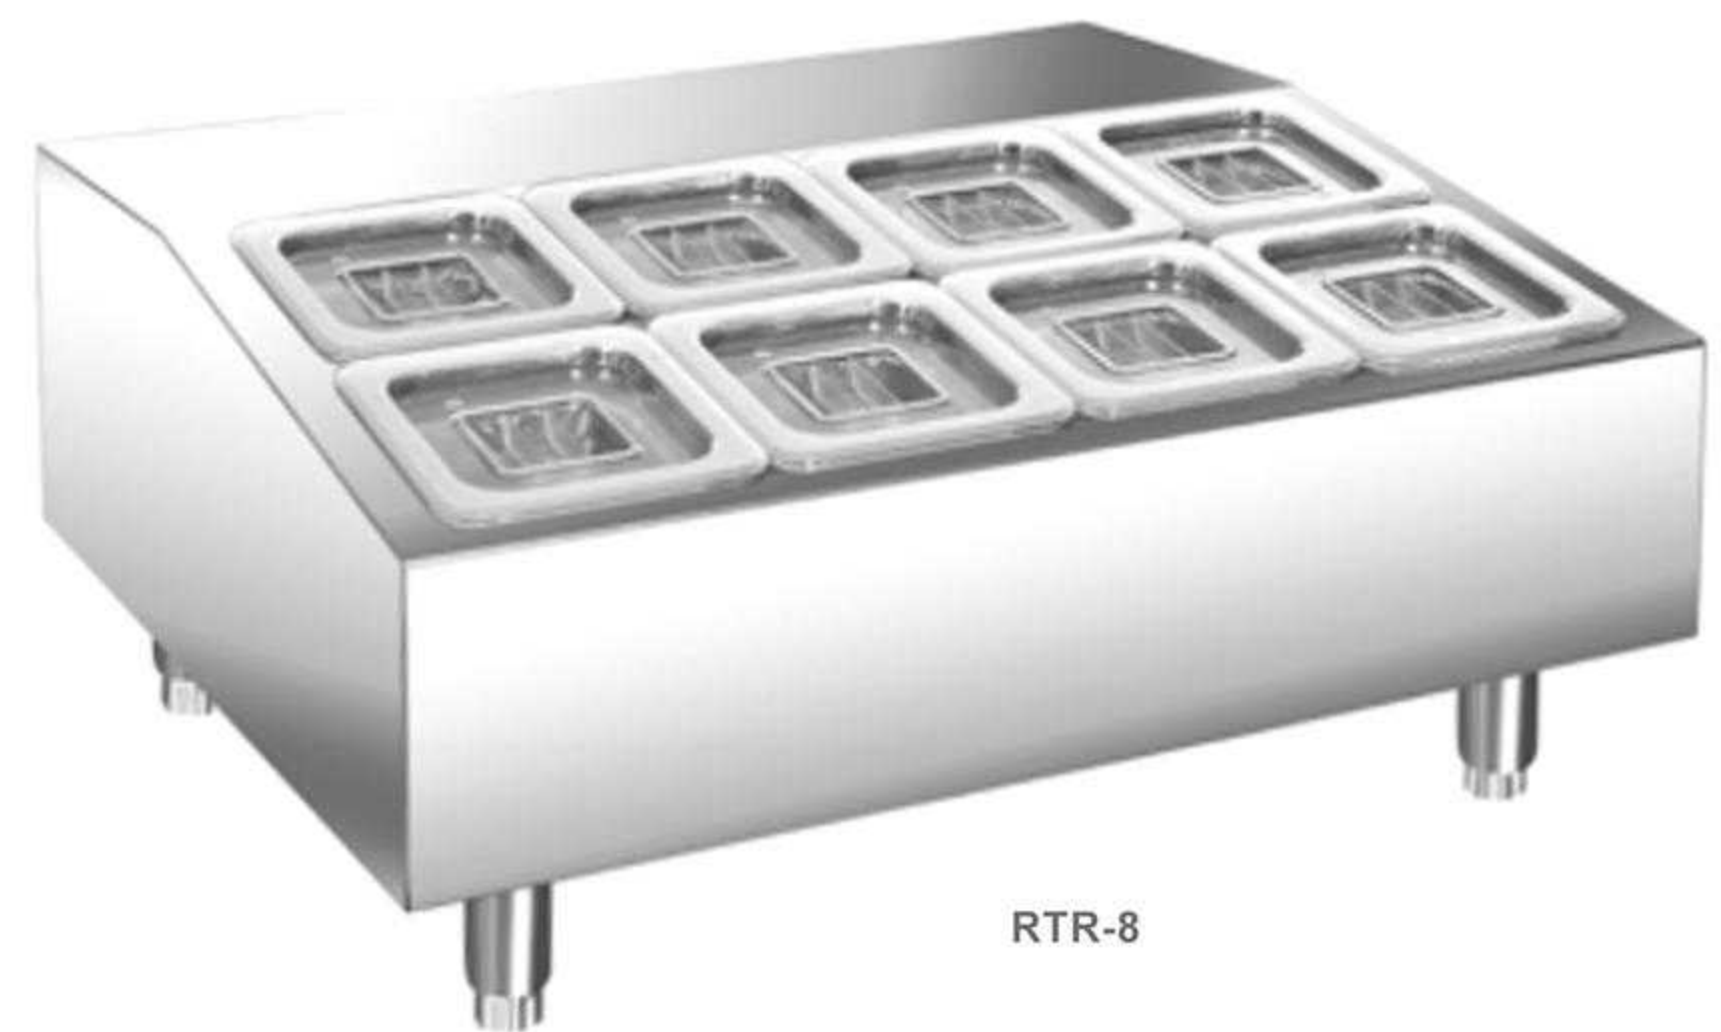

RTR-8

Model no	Dimensions (inch)	Net capacity (L)	Temperature (°F)	Compressor	40"loading Quantity
RTR-8	27.5*25.8*9.3	GN1/6 x 8	32~41	Zel	336

Abs REFRIGERATION





ABS LINE UPRIGHT CHILLER/FREEZER




Standard Features:

- European standard ABS inside upright chiller and freezer.
- Digital thermostat.
- Revisable self-closing door.
- Shelves with narrow distance between wires for better goods stability.
- With Interior light.

Optional:

- White and stainless steel form.
- Glass and solid door.

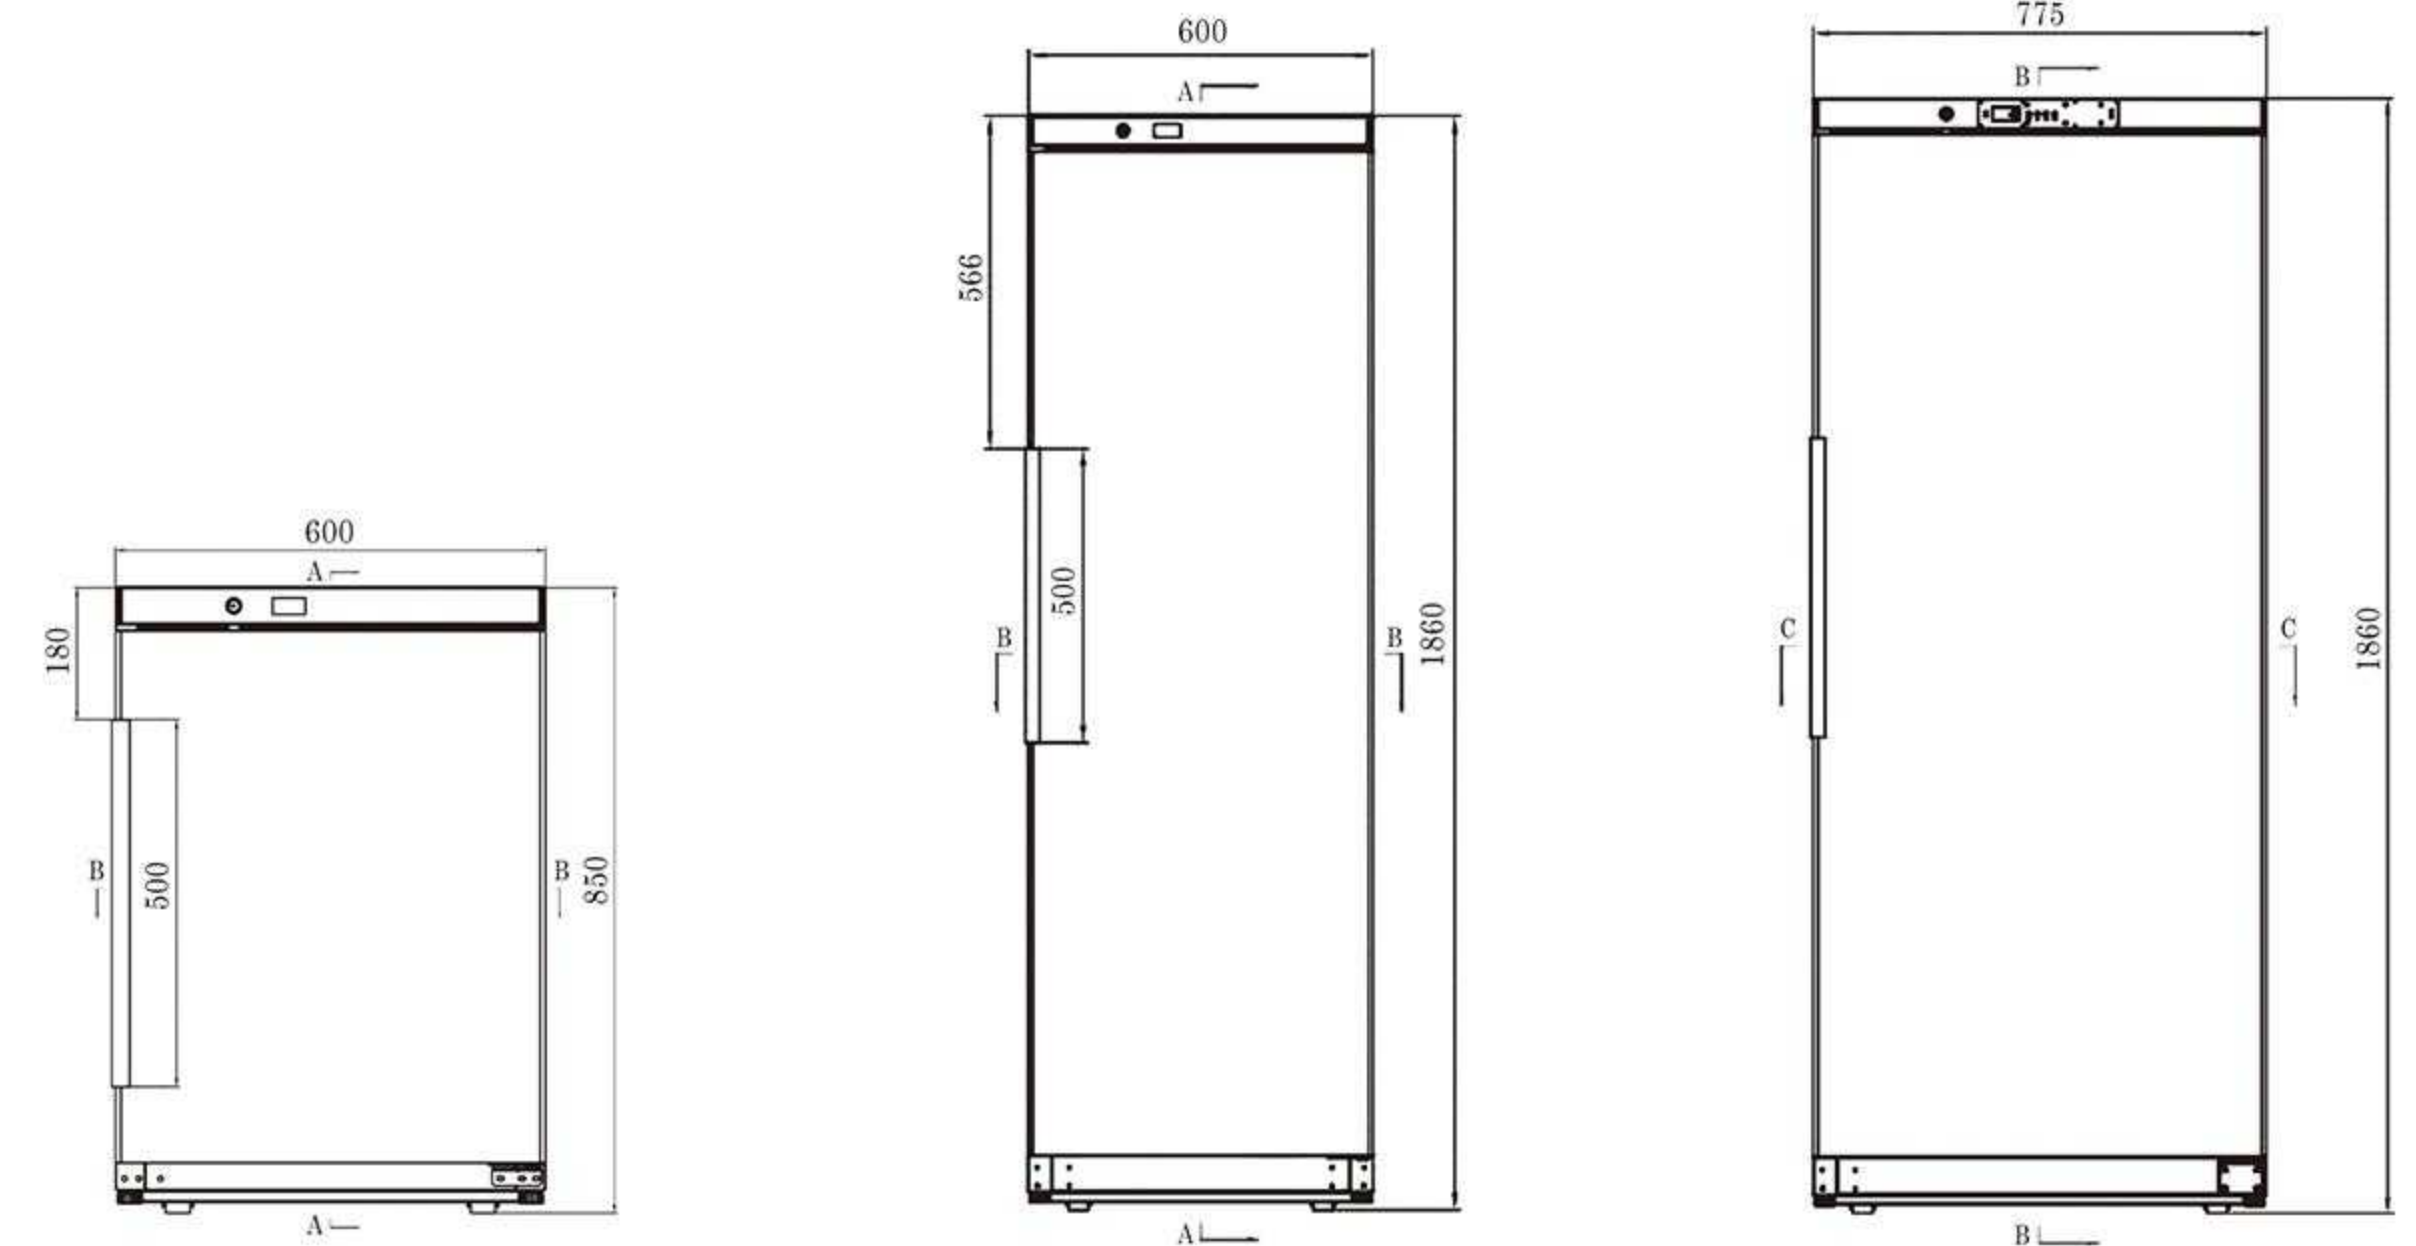

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SR12	600*600*850	120	0~+8	ZEL	Carel	R600a	108
SR12S	600*600*850	120	0~+8	ZEL	Carel	R600a	108
SR12G	600*600*850	120	0~+8	ZEL	Carel	R600a	108
SR12GS	600*600*850	120	0~+8	ZEL	Carel	R600a	108
SF12V	600*600*850	120	-18~-22	ZEL	Carel	R600a	108
SF12VS	600*600*850	120	-18~-22	ZEL	Carel	R600a	108
SF12VG	600*600*850	120	-18~-22	ZEL	Carel	R600a	108
SF12VGS	600*600*850	120	-18~-22	ZEL	Carel	R600a	108

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SR30	600*600*1860	300	0~+8	ZEL	Carel	R600a	57
SR30S	600*600*1860	300	0~+8	ZEL	Carel	R600a	57
SR30G	600*600*1860	300	0~+8	ZEL	Carel	R600a	57
SR30GS	600*600*1860	300	0~+8	ZEL	Carel	R600a	57
SR30V	600*600*1860	300	0~+8	ZEL	Carel	R600a	57
SR30VS	600*600*1860	300	0~+8	ZEL	Carel	R600a	57
SR30VG	600*600*1860	300	0~+8	ZEL	Carel	R600a	57
SR30VGS	600*600*1860	300	0~+8	ZEL	Carel	R600a	57
SF30V	600*600*1860	300	-18~-22	ZEL	Carel	R290	57
SF30VS	600*600*1860	300	-18~-22	ZEL	Carel	R290	57
SF30VG	600*600*1860	300	-18~-22	ZEL	Carel	R290	57
SF30VGS	600*600*1860	300	-18~-22	ZEL	Carel	R290	57

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SR58	775*750*1860	580	0~+8	ZEL	Carel	R600a	42
SR58S	775*750*1860	580	0~+8	ZEL	Carel	R600a	42
SR58G	775*750*1860	580	0~+8	ZEL	Carel	R600a	42
SR58GS	775*750*1860	580	0~+8	ZEL	Carel	R600a	42
SR58V	775*750*1860	580	0~+8	ZEL	Carel	R600a	42
SR58VS	775*750*1860	580	0~+8	ZEL	Carel	R600a	42
SR58VG	775*750*1860	580	0~+8	ZEL	Carel	R600a	42
SR58VGS	775*750*1860	580	0~+8	ZEL	Carel	R600a	42
SF58V	775*750*1860	580	-18~-22	HUAYI	Carel	R290	42
SF58VS	775*750*1860	580	-18~-22	HUAYI	Carel	R290	42
SF58VG	775*750*1860	580	-18~-22	HUAYI	Carel	R290	42
SF58VGS	775*750*1860	580	-18~-22	HUAYI	Carel	R290	42



SR/SF LINE UPRIGHT CHILLER/FREEZER




Standard Features:

- European standard white prepainted solid door upright chiller and freezer.
- Digital thermostat.
- Revisable self-closing door.
- Shelves with narrow distance between wires for better goods stability.
- 7 layer of evaporator as shelves for freezer.
- With Interior light.

Optional:

- White and stainless steel form.
- Glass and solid door.

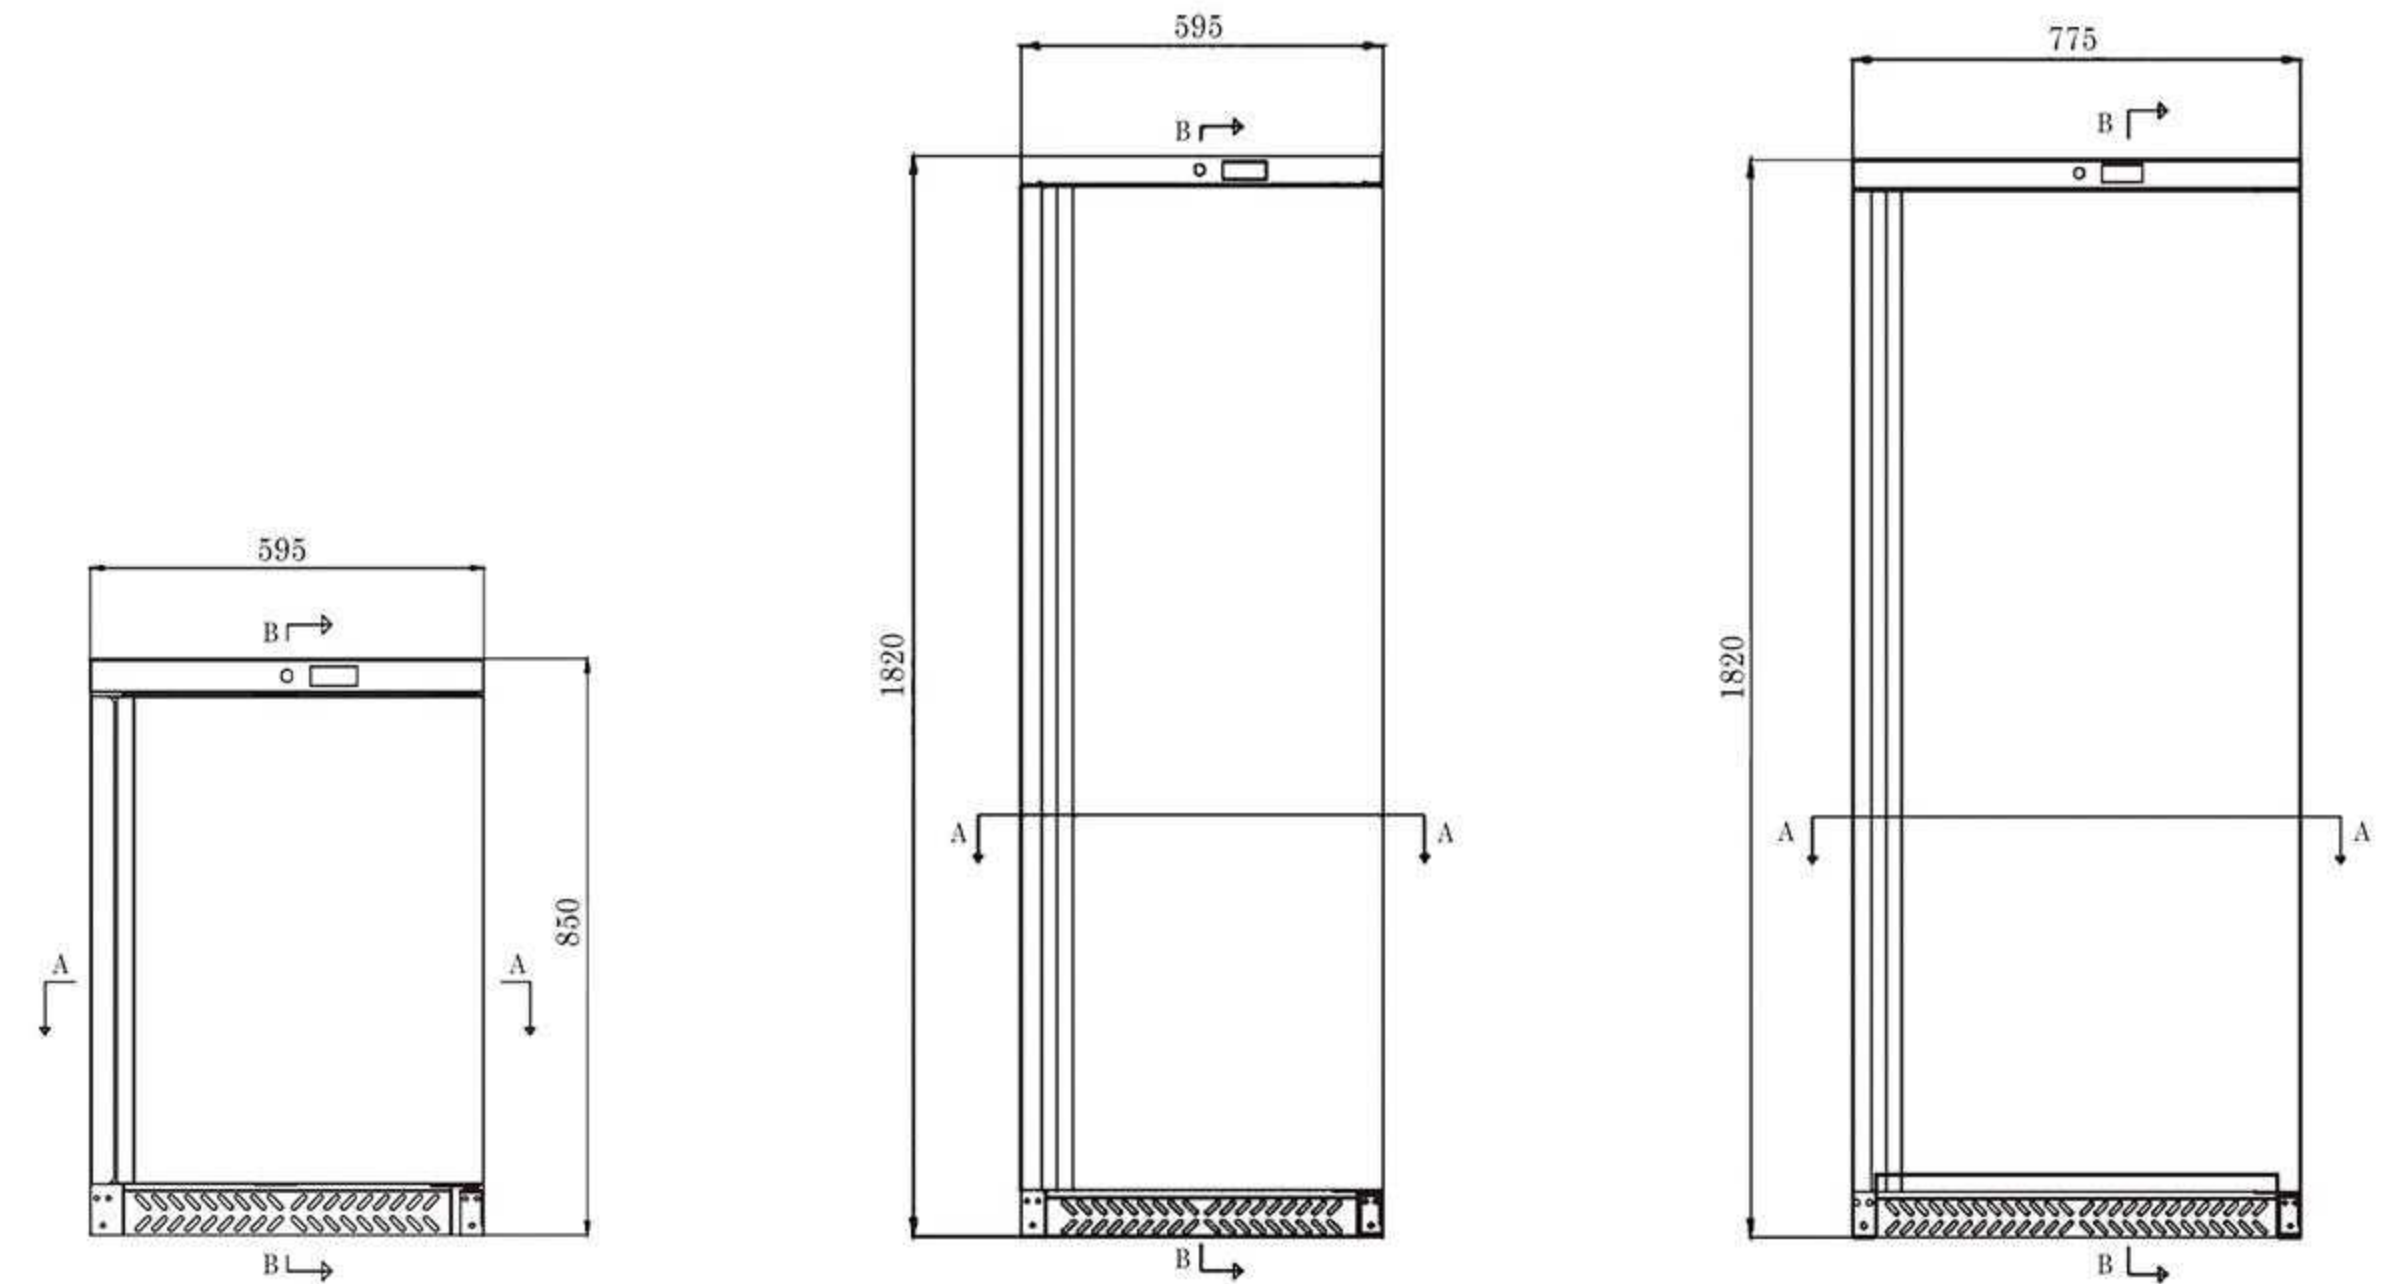

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SR20	595*653*870	170	0~+8	ZEL	Carel	R600a	108
SR20G	595*653*870	170	0~+8	ZEL	Carel	R600a	108
SR20S	595*653*870	170	0~+8	ZEL	Carel	R600a	108
SR20GS	595*653*870	170	0~+8	ZEL	Carel	R600a	108
SF20	595*653*870	170	-18~-22	ZEL	Carel	R600a	108
SF20G	595*653*870	170	-18~-22	ZEL	Carel	R600a	108
SF20S	595*653*870	170	-18~-22	ZEL	Carel	R600a	108

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SR40	595*653*1840	380	0~+8	ZEL	Carel	R600a	54
SR40G	595*653*1840	380	0~+8	ZEL	Carel	R600a	54
SR40S	595*653*1840	380	0~+8	ZEL	Carel	R600a	54
SR40GS	595*653*1840	380	0~+8	ZEL	Carel	R600a	54
SR40V	595*653*1840	380	0~+8	ZEL	Carel	R600a	54
SR40VG	595*653*1840	380	0~+8	ZEL	Carel	R600a	54
SR40VS	595*653*1840	380	0~+8	ZEL	Carel	R600a	54
SR40VGS	595*653*1840	380	0~+8	ZEL	Carel	R600a	54
SF40V	595*653*1840	380	-18~-22	ZEL	Carel	R290	54
SF40VG	595*653*1840	380	-18~-22	ZEL	Carel	R290	54
SF40VS	595*653*1840	380	-18~-22	ZEL	Carel	R290	54
SF40VGS	595*653*1840	380	-18~-22	ZEL	Carel	R290	54

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
SR60	775*723*1840	590	0~+8	ZEL	Carel	R600a	42
SR60G	775*723*1840	590	0~+8	ZEL	Carel	R600a	42
SR60S	775*723*1840	590	0~+8	ZEL	Carel	R600a	42
SR60GS	775*723*1840	590	0~+8	ZEL	Carel	R600a	42
SR60V	775*723*1840	590	0~+8	ZEL	Carel	R600a	42
SR60VG	775*723*1840	590	0~+8	ZEL	Carel	R600a	42
SR60VS	775*723*1840	590	0~+8	ZEL	Carel	R600a	42
SR60VGS	775*723*1840	590	0~+8	ZEL	Carel	R600a	42
SF60V	775*723*1840	590	-18~-22	HUAYI	Carel	R290	42
SF60VS	775*723*1840	590	-18~-22	HUAYI	Carel	R290	42
SF60VG	775*723*1840	590	-18~-22	HUAYI	Carel	R290	42
SF60VGS	775*723*1840	590	-18~-22	HUAYI	Carel	R290	42

DRINKS





HEATPIPE MINIBAR



Standard Features:

- Advance peltier cooling.
- Work with heat pipe.
- Interior led light, shelves and door racks.

Optional:

- Different color.
- Lock and key.



Model no	Dimensions (mm)	Temp.(°C)	Capacity (L)	Noise (db)	N/W	40"loading Quantity
HP-28A	475*385*390	6~12	28	0	10.1	652
HP-30A	475*385*455	6~12	30	0	10.8	626
HP-40A	560*400*425	6~12	40	0	12.5	508

Glass door

Standard Features:

- Advance peltier cooling.
- Work with heat pipe.
- Interior led light, shelves and door racks.

Optional:

- Different color.
- Lock and key.



Model no	Dimensions (mm)	Temp.(°C)	Capacity (L)	Noise (db)	N/W	40"loading Quantity
HP-28BM	475*385*390	6~12	28	0	10.1	652
HP-30BM	475*385*455	6~12	30	0	10.8	626
HP-40BM	560*400*425	6~12	40	0	12.5	508

ABSORPTION MINIBAR



Standard Features:

- Super silent operation.
- Auto defrost.
- LED lamp.
- Adjustable shelves.

Optional:

- Different color.
- Lock and key.
- Reversible door.



Model no	Dimensions (mm)	Temp.(°C)	Capacity (L)	Noise (db)	N/W	40"loading Quantity
AB-30	402*420*500	3~12	30	0	13.5	600
AB-40	402*455*560	3~12	40	0	15.5	484
AB-50	402*455*670	3~12	50	0	17.5	438

Glass door

Standard Features:

- Advance peltier cooling.
- Work with heat pipe.
- Interior led light, shelves and door racks.

Optional:

- Different color.
- Lock and key.



Model no	Dimensions (mm)	Temp.(°C)	Capacity (L)	Noise (db)	N/W	40"loading Quantity
AB-30TE	402*420*500	4~12	30	0	14.5	600
AB-40TE	402*455*560	4~12	40	0	15.5	484
AB-50TE	402*455*670	4~12	50	0	16.5	438

BACKBAR WITH HINGED DOOR



Standard Features:

- Automatic self-closing hinged door.
- Double layers tempered glass.
- Removable digital thermostat.
- 2 adjustable shelves per door.
- Interior LED light.
- Fan assisted cooling.
- Replaceable door gasket.
- Lock and key.



Hinged door with 84mm Height

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
BBS-128H	600*520*840	128	0~+8	ZEL	Carel	R600a	216
BBD-198H	900*520*840	198	0~+8	ZEL	Carel	R600a	144
BBT-320H	1350*520*840	320	0~+8	ZEL	Carel	R600a	99

Hinged door with 90mm Height

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
BBS-130H	600*520*900	138	0~+8	ZEL	Carel	R600a	144
BBD-230H	900*520*900	208	0~+8	ZEL	Carel	R600a	96
BBT-350H	1350*520*900	330	0~+8	ZEL	Carel	R600a	66

BACKBAR WITH SLINDING DOOR



Standard Features:

- Automatic self-closing sliding door.
- Double layers tempered glass.
- Removable digital thermostat.
- 2 adjustable shelves per door.
- Interior LED light.
- Fan assisted cooling.
- Replaceable door gasket.
- Lock and key.



Sliding door with 84mm Height

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
BBD-198S	900*520*840	198	0~+8	ZEL	Carel	R600a	144
BBT-320S	1350*520*840	320	0~+8	ZEL	Carel	R600a	99

Hinged door with 90mm Height

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
BBD-230S	900*520*900	208	0~+8	ZEL	Carel	R600a	96
BBT-350S	1350*520*900	330	0~+8	ZEL	Carel	R600a	66





BACKBAR COUNTER



Standard Features:

- Exterior material : Black powder painted steel.
- Interior material of cabinet :Embossed aluminium.
- Interior material of drawer: SUS 201.
- Reversible self-closing door.
- Copper tube and aluminum finned evaporator.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.

Optional:

- Adjustable feet or castors.
- With GN1/3,GN2/3,GN1/2 drawers.
- Interior lighting LED.



2 doors

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC210	1465*520*840	280	2~+8	Embraco	Carel	R290	54



1 door + 2 * GN1/2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC220	1465*520*840	280	2~+8	Embraco	Carel	R290	54



4 * GN1/2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC240	1465*520*840	280	2~+8	Embraco	Carel	R290	54



Standard Features:

- Exterior material : Black powder painted steel.
- Interior material of cabinet :Embossed aluminium.
- Interior material of drawer: SUS 201.
- Reversible self-closing door.
- Copper tube and aluminum finned evaporator.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.

Optional:

- Adjustable feet or castors.
- With GN1/3,GN2/3,GN1/2 drawers.
- Interior lighting LED.



3 doors

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC310	2005*520*840	425	2~+8	Embraco	Carel	R290	43



2 doors + 2 * GN1/2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC320	2005*520*840	425	2~+8	Embraco	Carel	R290	43



1 door + 2 * GN1/2 drawers + 3*GN1/3 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC350	2005*520*840	425	2~+8	Embraco	Carel	R290	43



6 * GN1/2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC360	2005*520*840	425	2~+8	Embraco	Carel	R290	43





BACKBAR COUNTER



Standard Features:

- Exterior material : Black powder painted steel.
- Interior material of cabinet :Embossed aluminium.
- Interior material of drawer: SUS 201.
- Reversible self-closing door.
- Copper tube and aluminum finned evaporator.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.

Optional:

- Adjustable feet or castors.
- With GN1/3,GN2/3,GN1/2 drawers.
- Interior lighting LED.



4 doors

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC410	2545*520*840	600	2~-8	Embraco	Carel	R290	34



3 doors + 2* GN1/2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC420	2545*520*840	600	2~-8	Embraco	Carel	R290	34



2 doors + 4* GN1/2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC440	2545*520*840	600	2~-8	Embraco	Carel	R290	34



1 door + 6* GN1/2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC460	2545*520*840	600	2~-8	Embraco	Carel	R290	34



8* GN1/2 drawers

Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC480	2545*520*840	600	2~-8	Embraco	Carel	R290	34



BACKBAR COUNTER

GLASS DOOR



Standard Features:

- Exterior material : Black powder painted steel.
- Interior material of cabinet : Embossed aluminium.
- Reversible self-closing door.
- Copper tube and aluminum finned evaporator.
- Digital thermostat.
- Ventilated cooling.
- Automatic defrost.

Optional:

- Adjustable feet or castors.
- Interior lighting LED.
- Stainless steel shelf.
- Touch screen.



Glass Door


Model no	Dimensions (mm)	Net capacity (L)	Temperature (°C)	Compressor	Thermostat	Coolant	40"loading Quantity
DC210G	1465*520*840	280	2~+8	Embraco	Carel	R290	54
DC310G	2005*520*840	425	2~+8	Embraco	Carel	R290	43
DC410G	2545*520*840	600	2~+8	Embraco	Carel	R290	34





CONDIMENT CENTER

Standard Features:

- Designed for bar and beverage stations, various combinations, simple dismounting, applicable to all places.
- Customers can choose inner match and accessories according to their own needs. When using shallow.
- inner box, ice cubes or ice packs can be placed in the space below the box to maintain food freshness.
- Accessory B has a handle shape for convenient use.
- Accessory C can be used for toothpick, fork, coffee companion etc.
- Accessory D may fit two separate boxes together up and down.

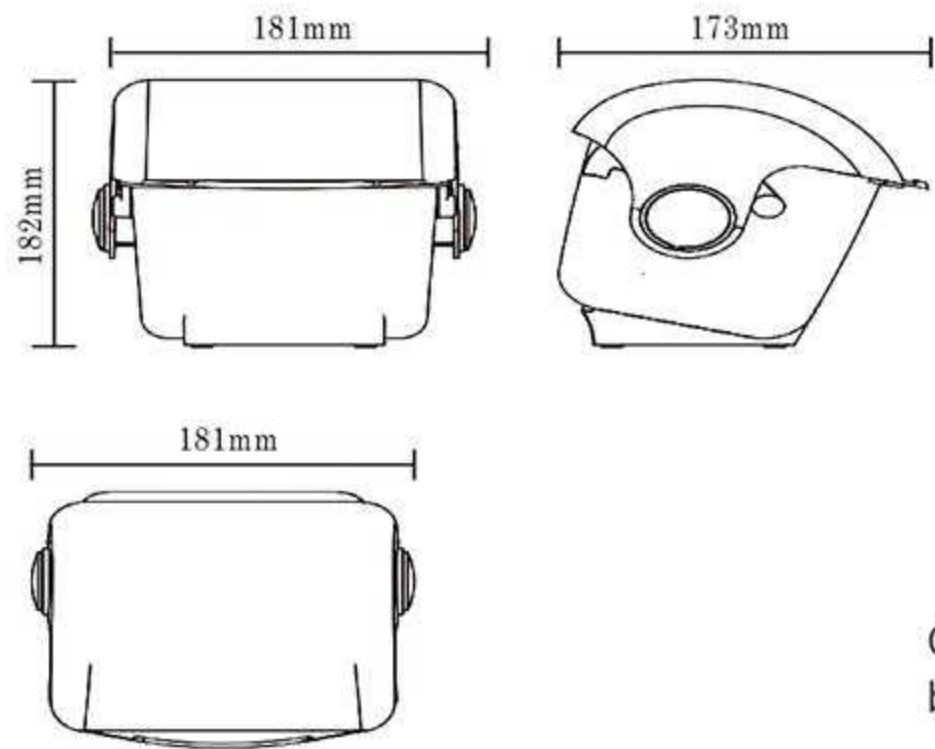

Optional accessories inner box: 1, 2, etc

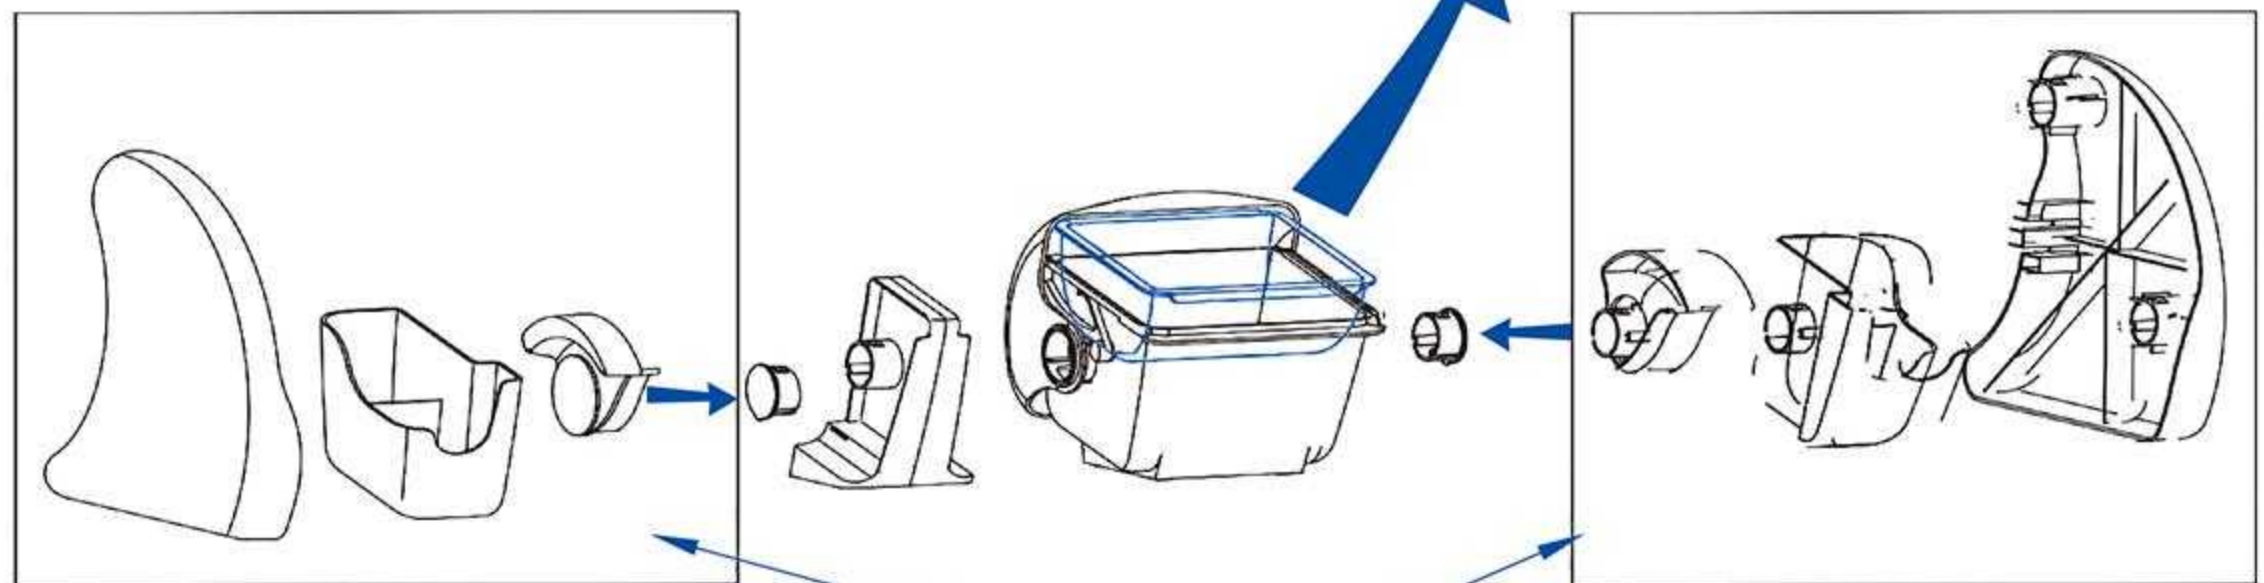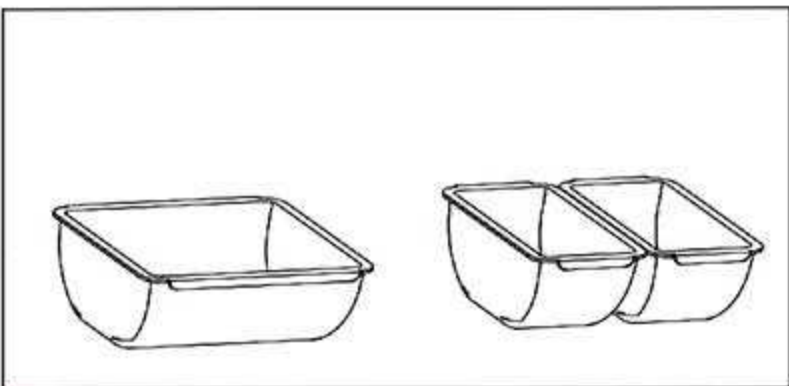


Optional accessories: A, B, C, etc



A STYLE

Model no	Center Includes	Capacity
A001	1 pcs 1 qt.(0.95L) standary tray	1 qt. (0.95L)
A002	1 pcs 2 qt (1.91L) deep tray	2 qt. (1.9L)
A003	2 pcs 1 pt.(0.47L) standard trays	2 pt. (0.95L)
A004	2 pcs 1.5 pt.(0.71L) deep trays	3 pt. (1.4L)

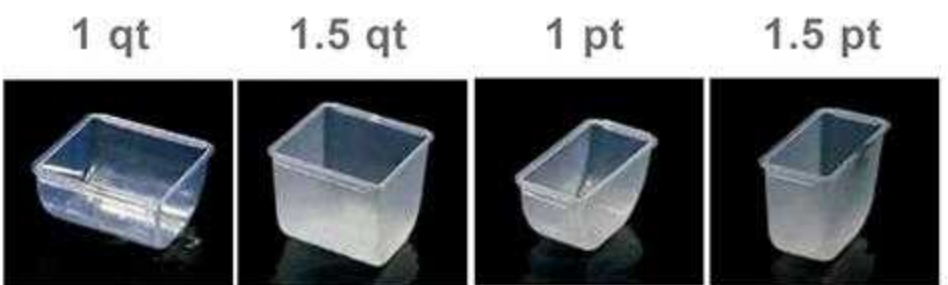

B STYLE

Model no	Description	Capacity
B001	1 pcs 1 qt.(0.95L) standary tray	1 qt. (0.95L)
B002	1 pcs 2 qt (1.91L) deep tray	2 qt. (1.9L)
B003	2 pcs 1 pt.(0.47L) standard trays	2 pt. (0.95L)
B004	2 pcs 1.5 pt.(0.71L) deep trays	3 pt. (1.4L)

C STYLE with right hand caddy

Model no	Description	Capacity
C001	1 pcs 1 qt.(0.95L) standary tray	1 qt. (0.95L)
C002	1 pcs 2 qt (1.91L) deep tray	2 qt. (1.9L)
C003	2 pcs 1 pt.(0.47L) standard trays	2 pt. (0.95L)
C004	2 pcs 1.5 pt.(0.71L) deep trays	3 pt. (1.4L)

D STYLE

Model no	Description	Capacity
D001	2 pcs 1 qt.(0.95L) standary tray	2 qt. (1.9L)
D002	2 pcs 2 qt (1.91L) deep tray	4 qt. (3.8L)
D003	4 pcs 1 pt.(0.47L) standard trays	4 pt. (1.9L)
D004	4 pcs 1.5 pt.(0.71L) deep trays	6 pt. (2.8L)

E STYLE


Model no	Description	Capacity
E001	4 pcs 1 qt.(0.95L) standary tray	4 qt. (3.8L)
E002	4 pcs 2 qt (1.91L) deep tray	8 qt. (7.6L)
E003	8 pcs 1 pt.(0.47L) standard trays	8 pt. (3.8L)
E004	8 pcs 1.5 pt.(0.71L) deep trays	12 pt. (5.6L)



CONDIMENT CENTER

Standard Features:

- Designed for bar and beverage stations,various combinations,simple dismounting,applicable to all places.
- Customers can choose inner match and accessories according to their own needs.When using shallow.
- inner box, ice cubes or ice packs can be placed in the space below the box to maintain food freshness.
- Accessory B has a handle shape for convenient use.
- Accessory C can be used for toothpick, fork, coffee companion etc.
- Accessory D may fit two separate boxes together up and down.

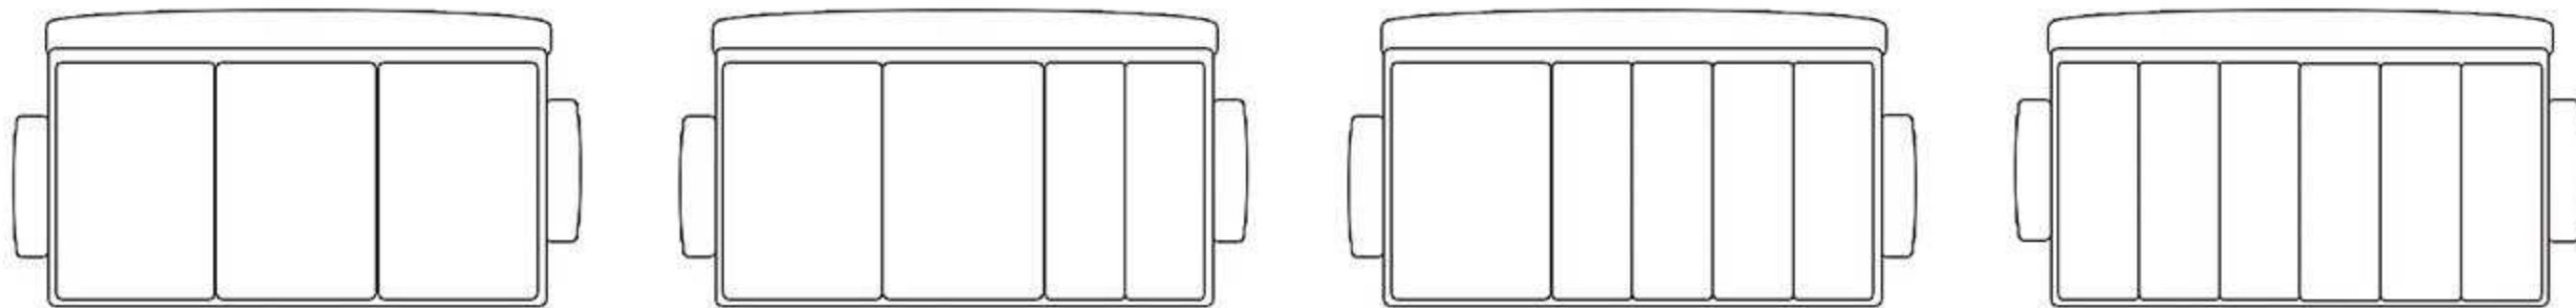

A STYLE		
Model no	Description	Capacity
A011	3 pcs 1 qt.(0.95L) standary tray	3 qt. (2.85L)
A021	2 pcs 1 qt (0.95L) + 2 pcs 1 pt.(0.47L) standard trays	3 qt. (2.85L)
A031	1 pcs 1 qt (0.95L) + 4 pcs 1 pt.(0.47L) standard trays	3 qt. (2.85L)
A041	6 pcs 1 pt.(0.47L) standard trays	3 qt. (2.85L)
A012	3 pcs 2 qt (1.91L) deep tray	6 qt. (5.7L)
A022	2 pcs 2 qt (1.91L) + 2 pcs 1.5 pt.(0.71L) deep trays	5.5 qt. (5.24L)
A032	1 pcs 2 qt (1.91L) + 4 pcs 1.5 pt.(0.71L) deep trays	5 qt. (4.75L)
A042	6 pcs 1.5 pt.(0.71L) deep trays	4.5 qt. (4.275L)



B012



B042

B STYLE		
Model no	Description	Capacity
B011	3 pcs 1 qt.(0.95L) standary tray	3 qt. (2.85L)
B021	2 pcs 1 qt (0.95L) + 2 pcs 1 pt.(0.47L) standard trays	3 qt. (2.85L)
B031	1 pcs 1 qt (0.95L) + 4 pcs 1 pt.(0.47L) standard trays	3 qt. (2.85L)
B041	6 pcs 1 pt.(0.47L) standard trays	3 qt. (2.85L)
B012	3 pcs 2 qt (1.91L) deep tray	6 qt. (5.7L)
B022	2 pcs 2 qt (1.91L) + 2 pcs 1.5 pt.(0.71L) deep trays	5.5 qt. (5.24L)
B032	1 pcs 2 qt (1.91L) + 4 pcs 1.5 pt.(0.71L) deep trays	5 qt. (4.75L)
B042	6 pcs 1.5 pt.(0.71L) deep trays	4.5 qt. (4.275L)



C012



C042

C STYLE with left & right hand caddy		
Model no	Description	Capacity
C011	3 pcs 1 qt.(0.95L) standary tray	3 qt. (2.85L)
C021	2 pcs 1 qt (0.95L) + 2 pcs 1 pt.(0.47L) standard trays	3 qt. (2.85L)
C031	1 pcs 1 qt (0.95L) + 4 pcs 1 pt.(0.47L) standard trays	3 qt. (2.85L)
C041	6 pcs 1 pt.(0.47L) standard trays	3 qt. (2.85L)
C012	3 pcs 2 qt (1.91L) deep tray	6 qt. (5.7L)
C022	2 pcs 2 qt (1.91L) + 2 pcs 1.5 pt.(0.71L) deep trays	5.5 qt. (5.24L)
C032	1 pcs 2 qt (1.91L) + 4 pcs 1.5 pt.(0.71L) deep trays	5 qt. (4.75L)
C042	6 pcs 1.5 pt.(0.71L) deep trays	4.5 qt. (4.275L)



F012



F042

F STYLE		
Model no	Description	Capacity
F011	6 pcs 1 qt.(0.95L) standary tray	6 qt. (5.7L)
F021	4 pcs 1 qt (0.95L) + 4 pcs 1 pt.(0.47L) standard trays	6 qt. (5.7L)
F031	2 pcs 1 qt (0.95L) + 8 pcs 1 pt.(0.47L) standard trays	6 qt. (5.7L)
F041	12 pcs 1 pt.(0.47L) standard trays	6 qt. (5.7L)
F012	6 pcs 2 qt (1.91L) deep tray	12 qt. (11.4L)
F022	4 pcs 2 qt (1.91L) +4 pcs 1.5 pt.(0.71L) deep trays	11 qt. (10.48L)
F032	2 pcs 2 qt (1.91L) +8 pcs 1.5 pt.(0.71L) deep trays	10 qt. (9.5L)
F042	12 pcs 1.5 pt.(0.71L) deep trays	9 qt. (8.55L)

SLUSH MACHINE | 10 LITER



Standard Features:

- 10 Liter machine guarantee the production and distribution of frozen drinks quickly at surprisingly low cost.
- These machine represent the best solution for slush, sher. bet, yogurt, cappuccino, and frozen drinks.
- Compact and luxurious in design.
- Frozen and liquid drinks 2 in 1 machine.
- Night mode to keep the drinks fresh over night.
- Two large 10 liter hoppers for optimum cooling and serving capacity.
- High quality in compressor and wonderful working perfor-mance.
- LED light in illumination on top of the machine, to make the drinks more attractive.
- R304 stainless steel and ABS body panel for your choice.
- Food-grade high density polycarbonate bowl, health and environmental protection.
- Bowl and faucet easy to disassemble for quick cleaning and utmost hygiene.



XRJ10Lx1N



XRJ10Lx2N



XRJ10Lx3N

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
XRJ10Lx1N	270*580*790	220V-240V 110V-120V	50HZ/60HZ	300	-2~-3°C	28	40
XRJ10Lx2N	470*580*790	220V-240V 110V-120V	50HZ/60HZ	400	-2~-3°C	44	59
XRJ10Lx3N	660*580*790	220V-240V 110V-120V	50HZ/60HZ	500	-2~-3°C	61	80

SLUSH MACHINE | 12 LITER



Standard Features:

- 12 Liter machine guarantee the production and distribution of frozen drinks quickly at surprisingly low cost.
- These machine represent the best solution for slush, sher. bet, yogurt, cappuccino, and frozen drinks.
- Compact and luxurious in design.
- Frozen and liquid drinks 2 in 1 machine.
- Night mode to keep the drinks fresh over night.
- Two large 12 liter hoppers for optimum cooling and serving capacity.
- High quality in compressor and wonderful working perfor-mance.
- LED light in illumination on top of the machine, to make the drinks more attractive.
- R304 stainless steel and ABS body panel for your choice.
- Food-grade high density polycarbonate bowl, health and environmental protection.
- Bowl and faucet easy to disassemble for quick cleaning and utmost hygiene.



XRJ12Lx1T



XRJ12Lx2T



XRJ12Lx3T

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
XRJ12Lx1T	220*510*770	220V-240V 110V-120V	50HZ/60HZ	500	-2~-3°C	29	40
XRJ12Lx2T	430*510*770	220V-240V 110V-120V	50HZ/60HZ	600	-2~-3°C	44	56
XRJ12Lx3T	610*510*770	220V-240V 110V-120V	50HZ/60HZ	800	-2~-3°C	63	76



SLUSH MACHINE

Standard Features:

- Compact and luxurious in design.
- Advanced electronic temperature controller with a digital display that indicated the temperature of the beverages.
- Frozen and liquid drinks 2 in 1 machine.
- Night mode to keep the drinks fresh over night.
- Very simple to program and run with touch pad display which also guides cleaning and preventive maintenance.
- Lighted displays for merchant graphics.
- Internally monitored refrigeration system to ensure long lasting performance.
- High quality in compressor and wonderful working performance.
- LED light in illumination.
- Food-grade high density polycarbonate bowl, health and environmental protection.
- Bowl and faucet easy to disassemble for quick cleaning and utmost hygiene.



NANO3Lx2



XRJ12Lx2M

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
NANO3Lx2	370*330*430	220V-240V 110V-120V	50HZ/60HZ	380	-2~-3°C	22	27
XRJ12Lx2M	380*620*760	220V-240V 110V-120V	50HZ/60HZ	600	-2~-3°C	64	78

MINI ICE CREAM MACHINE

Standard Features:

- Soft ice cream and Slush Juice 3 in 1 machine.



ICE8L-Digital



ICE8Lx2-Digital

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
ICE8L-Digital	260*420*740	220V-240V 110V-120V	50HZ	600	-3~-8°C	30	40
ICE8Lx2-Digital	470*420*740	220V-240V 110V-120V	50HZ	900	-3~-8°C	43	54

HOT CHOCOLATE MACHINE

Standard Features:

- Varied kinds of hot drinks can be served by this lovely product.
- such as hot chocolate, tea, coffee,milk, soup and mulled wine,etc.
- Sleek and compact design ,easy for operation.
- Electronic heating system with a wide controller range of temperature 30 °C to 90 °C.
- LED screen with Press-button, wich show the heat temperature very clear at a glance.
- Super stronger mixing paddle,drives the liquid uniformly and no-stick.
- All plastics parts made of food grade polycarbonate which was unbreakable and easy for clean.
- Food grade #304 stainless steel base plate with thermal protector.



CH5L



CH10L

Model no	Dimension (mm)	Voltage (v)	Frequency (Hz)	Hot Power (w)	Motor Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
CH5L	400*320*470	220V-240V 110V-115V	50-60	400	40	30-90	6	9
CH10L	400*320*570	220V-240V 110V-115V	50-60	400	40	30-90	7	10

JUICE DISPENSER | 9L



LSJ9LX1



LSJ9LX2



LSJ9LX3



LSJ9LX4

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Cold Power (w)	Cold Temperature Range (°C)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
LSJ9LX1	390*210*670	220V-240V 110V-120V	50HZ/60HZ	180	7~12°C	360	52~-58°C	13	15
LSJ9LX2	390*330*670	220V-240V 110V-120V	50HZ/60HZ	280	7~12°C	800	52~-58°C	21	23
LSJ9LX3	390*410*670	220V-240V 110V-120V	50HZ/60HZ	280	7~12°C	800	52~-58°C	27	29
LSJ9LX4	390*530*670	220V-240V 110V-120V	50HZ/60HZ	380	7~12°C	1200	52~-58°C	30	33

JUICE DISPENSER | 12L



LSJ12LX1



LSJ12LX2



LSJ12LX3



LSJ12LX4

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Cold Power (w)	Cold Temperature Range (°C)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
LSJ12LX1	410*350*660	220V-240V 110V-120V	50HZ/60HZ	180	7~12°C	440	52~-58°C	21	24
LSJ12LX2	410*410*660	220V-240V 110V-120V	50HZ/60HZ	280	7~12°C	900	52~-58°C	25	28
LSJ12LX3	600*410*660	220V-240V 110V-120V	50HZ/60HZ	320	7~12°C	1200	52~-58°C	33	36
LSJ12LX4	780*410*660	220V-240V 110V-120V	50HZ/60HZ	380	7~12°C	1500	52~-58°C	40	43

JUICE DISPENSER | 18L



LSJ18LX1



LSJ18LX2



LSJ18LX3

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Cold Power (w)	Cold Temperature Range (°C)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
LSJ18LX1N	430*350*740	220V-240V 110V-120V	50HZ/60HZ	180	7~12°C	600	52~58°C	24	25
LSJ18LX2N	480*460*740	220V-240V 110V-120V	50HZ/60HZ	280	7~12°C	600	52~58°C	29	31
LSJ18LX3N	700*430*740	220V-240V 110V-120V	50HZ/60HZ	380	7~12°C	600	52~58°C	37	39

JUICE DISPENSER | 25L



LSJ25L



LSJ25LS



LSJ25LX2S

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Cold Power (w)	Cold Temperature Range (°C)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
LSJ25L	380*420*740	220V-240V 110V-120V	50HZ/60HZ	240	7~12°C	800	52~58°C	19	22
LSJ25LS	380*420*740	220V-240V 110V-120V	50HZ/60HZ	240	7~12°C	800	52~58°C	19	22
LSJ25LX2S	380*650*740	220V-240V 110V-120V	50HZ/60HZ	350	7~12°C	/	/	27	30

DISPLAYS





BEVERAGE COOLER
WITH CANOPY

- Standard Features:**
- Exterior black PCM, interior white pre-painted aluminium sheet.
 - Vertical interior lighting LED.
 - Adjustable wire shelves.
 - Door frame in black plastic.
 - Door made of double layer tempered glass.
 - Temperature controller (1 to 7 °C).
 - Lock & Key.
- Optional:**
- Additional wire shelf available.
 - Digital thermostat available.
 - Automatic door closing available.
 - Condensation fan on bottom available.
 - Advertising stickers/serigraphy on light boxes/cabinet sides available.
 - Universal wheel with brake available.



LC-150



LC-230

Model no	Product Dimensions (mm)	Product Capacity (L)	Temp.Range (°C)	Shelf.No	N.W/G.W (kg)	40HQ load capacity
LC-150	500*535*1310	124	2~8	3	38/41	166
LC-200	500*535*1650	180	2~8	3	45/49	111
LC-230	550*535*1675	207	2~8	3	50/54	102
LC-260	550*535*1775	226	2~8	3	51/55	101



LC-360



Model no	Product Dimensions (mm)	Product Capacity (L)	Temp.Range (°C)	Shelf.No	N.W/G.W (kg)	40HQ load capacity
LC-320	600*572*1825	290	2~8	4	61/67	77
LC-360	600*572*1915	310	2~8	4	62/68	76
LC-480	600*572*2040	466	2~8	4	65/73	69



BEVERAGE COOLER
WITHOUT CANOPY

- Standard Features:**
- Exterior black PCM, interior white pre-painted aluminium sheet.
 - Vertical interior lighting LED.
 - Adjustable wire shelves.
 - Door frame in black plastic.
 - Door made of double layer tempered glass.
 - Temperature controller (1 to 7 °C).
 - Lock & Key.
- Optional:**
- Additional wire shelf available.
 - Digital thermostat available.
 - Automatic door closing available.
 - Condensation fan on bottom available.
 - Advertising stickers/serigraphy on light boxes/cabinet sides available.
 - Universal wheel with brake available.



LC-150N



LC-230N

Model no	Product Dimensions (mm)	Product Capacity (L)	Temp.Range (°C)	Shelf.No	N.W/G.W (kg)	40HQ load capacity
LC-150N	500*535*1135	124	2~8	3	38/41	168
LC-200N	500*535*1460	180	2~8	3	45/49	140
LC-230N	550*535*1490	207	2~8	3	50/54	105
LC-260N	550*535*1590	226	2~8	3	51/55	104



LC-480N



LC-580N

Model no	Product Dimensions (mm)	Product Capacity (L)	Temp.Range (°C)	Shelf.No	N.W/G.W (kg)	40HQ load capacity
LC-320N	600*572*1640	290	2~8	4	61/67	77
LC-360N	600*572*1730	310	2~8	4	62/68	76
LC-480N	610*724*1845	466	2~8	4	65/73	69
LC-580N	700*730*1890	548	2~8	4	68/76	45



BEVERAGE COOLER



Standard Features:

- Exterior black PCM, interior white pre-painted aluminium sheet.
- Vertical interior lighting LED.
- Adjustable wire shelves.
- Door frame in black plastic.
- Door made of double layer tempered glass.
- Temperature controller (1 to 7 °C).
- Lock & Key.

Optional:

- Additional wire shelf available.
- Digital thermostat available.
- Automatic door closing available.
- Condensation fan on bottom available.
- Advertising stickers/serigraphy on light boxes/cabinet sides available.
- Universal wheel with brake available.



LC-600N



LC-600

Model no	Product Dimensions (mm)	Product Capacity (L)	Temp.Range (°C)	Shelf.No	N.W/G.W (kg)	40HQ load capacity
LC-600NB	972*572*1660	483	2~8	8	80/87	55
LC-600	972*572*1845	483	2~8	8	87/94	54



LC-800



LC-1200

Model no	Product Dimensions (mm)	Product Capacity (L)	Temp.Range (°C)	Shelf.No	N.W/G.W (kg)	40HQ load capacity
LC-800	1050*660*1995	680	2~8	8	120/130	32
LC-1200	1220*720*2040	1090	2~8	8	167/170	27



Standard Features:

- Exterior black PCM, interior white pre-painted aluminium sheet.
- Vertical interior lighting LED.
- Adjustable wire shelves.
- Door frame in black plastic.
- Door made of double layer tempered glass.
- Temperature controller (1 to 7 °C).
- Lock & Key.

Optional:

- Additional wire shelf available.
- Digital thermostat available.
- Automatic door closing available.
- Condensation fan on bottom available.
- Advertising stickers/serigraphy on light boxes/cabinet sides available.
- Universal wheel with brake available.



LC-600

Model no	Product Dimensions (mm)	Product Capacity (L)	Temp.Range (°C)	Shelf.No	N.W/G.W (kg)	40HQ load capacity
LC-360D	600*572*1915	310	2~8	4	66/72	76

COUNTERTOP BEVERAGE COOLER

Standard Features:

- Adjustable wire shelves.
- Ventilation fan inside.
- Temperature controller (1 to 7).
- Elegant LED light box.
- Double layer tempered glass door.
- Consolidating spray painting metal cabinet design.
- Perfect temperature for beer storage (-3~8°C).

Optional:

- Additional wire shelves available.
- Universal wheel with brake available.
- Numerical temperature display available.
- Automatic door closing available.
- Multiple colors available.
- External handle available.
- Lock and key.
- Advertising stickers/serigraphy.



LC-120B



LC-150B



LC-200B

Model no	Product Dimensions (mm)	Product Capacity (L)	Temp.Range (°C)	Shelf.No	N.W/G.W (kg)	40HQ load capacity
LC-120B	500*530*840	95	2~8	2	32/34	218
LC-150B	500*535*1070	124	2~8	3	33/36	168
LC-200B	500*535*1395	180	2~8	3	40/44	146



BEVERAGE COOLER

CLASSIC LINE

Standard Features:

- Self-evaporating water tray.
- LED vertical lighting + canopy LED light.
- Double glass and self-closing door.
- With lock and key.
- With black plastic handle and plastic door frame.
- Interior made of painted aluminium.

Optional:

- Additional wire shelf available.
- Promotional stickers/serigraphy available.
- Universal wheel with brake available.



GD-P160SH



GD-P338SH

Model no	Product Dimensions (mm)	Product Capacity (L)	Temp.Range (°C)	Shelf.No	Package Dimensions (mm)	40HQ load capacity
GD-P160SH	390*475*1880	160	0~10	4	450*530*1950	139
GD-P338SH	578*605*1980	338	0~10	4	624*630*2025	75
GD-P338VH	578*605*1980	338	0~10	4	624*630*2025	75



GD-P1000VS



GD-P1500VH

Model no	Product Dimensions (mm)	Product Capacity (L)	Temp.Range (°C)	Shelf.No	Package Dimensions (mm)	40HQ load capacity
GD-P1000VH	1130*700*2023	1000	0~10	8	1180*750*2100	30
GD-P1000VS	1130*720*2023	1000	0~10	8	1180*770*2100	30
GD-P1500VH	1710*720*2063	1500	0~10	15	1760*770*2140	15

BEVERAGE COOLER FREEZER




Standard Features:

- Material: black pre-coated steel.
- Cooler with two layers of tempered glass.
- Freezer with three layers of tempered glass, coated with heater.
- The ventilated system with high-efficiency compressor.
- Automatic defrost.
- LED lighting.
- Low energy framless doors.
- High impact display area.
- Mobile and versatile.
- Available as a fridge or freezer.

Optional:

- White pre-coated steel.

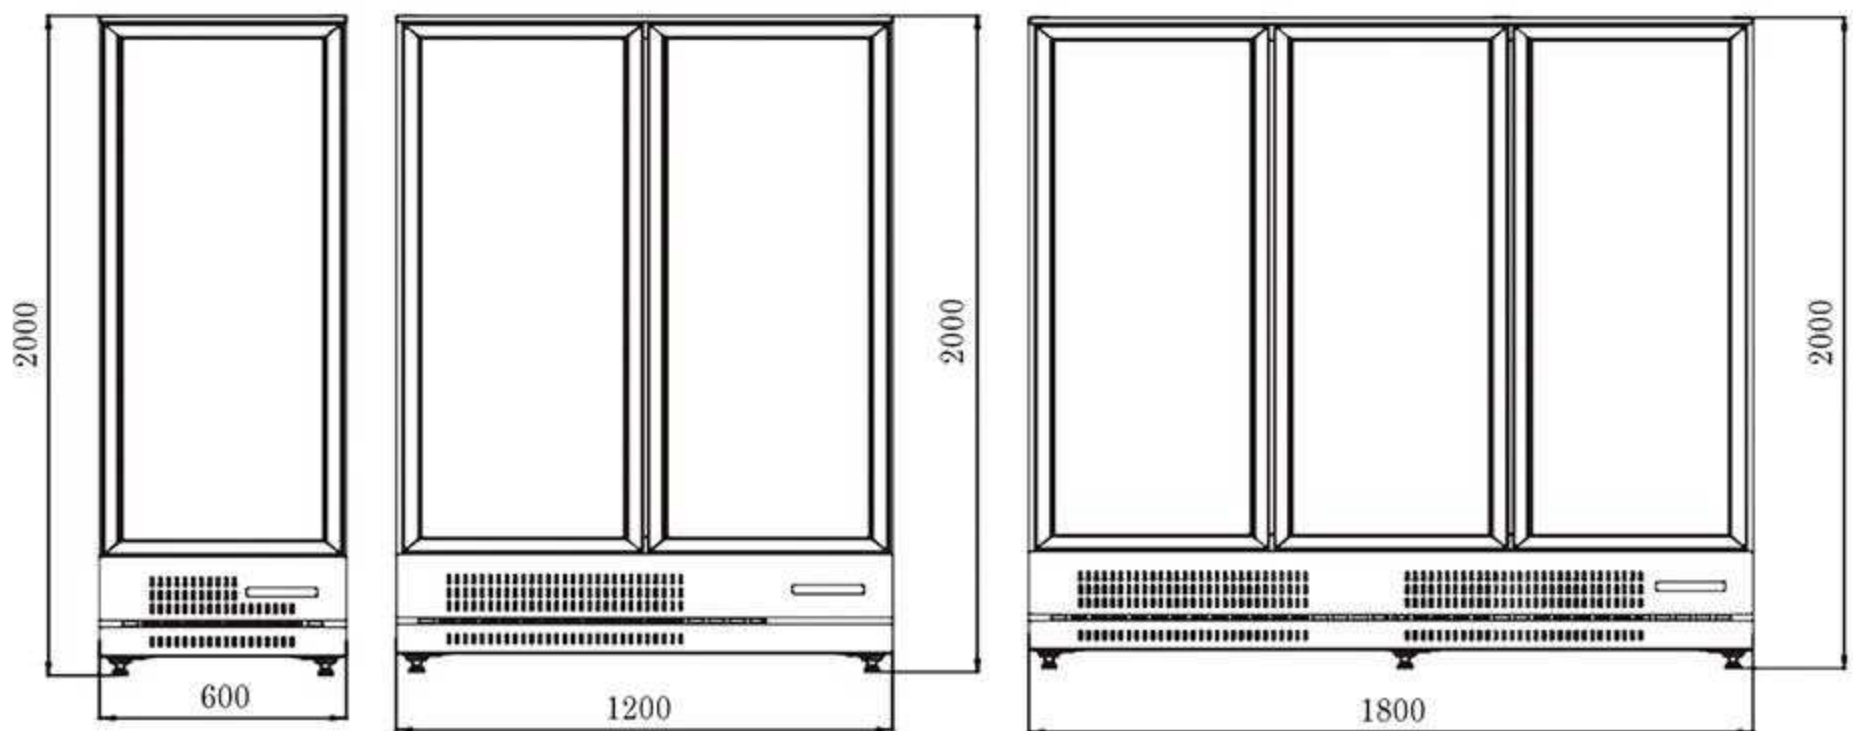

1 Door | 600mm

Model no	Dimensions (mm)	Capacity (L)	Temp.Range (°C)	Coolant	Shelf.No	Packing Size (mm)	40"loading Quantity
BR60CP	600*760*2000	255	+2 ~ +8	R290	4	670*830*2150	42
BF60CP	600*760*2000	255	-18~-22	R290	4	670*830*2150	42

2 Doors | 1200mm

Model no	Dimensions (mm)	Capacity (L)	Temp.Range (°C)	Coolant	Shelf.No	Packing Size (mm)	40"loading Quantity
BR120CP	1200*760*2000	582	+2 ~ +8	R290	8	1270*830*2150	23
BF120CP	1200*760*2000	582	-18~-22	R290	8	1270*830*2150	23

3 Doors | 1800mm

Model no	Dimensions (mm)	Capacity (L)	Temp.Range (°C)	Coolant	Shelf.No	Packing Size (mm)	40"loading Quantity
BR180CP	1800*760*2000	907	+2 ~ +8	R290	12	1870*830*2150	14
BF180CP	1800*760*2000	907	-18~-22	R290	12	1870*830*2150	14



COUNTERTOP REFRIGERATOR

Standard Features:

- U-shell design, clean and tidy appearance.
- Top LED lighting saves space and leaves no dead corners.
- Waterproof design, temperature display in the cabinet.
- Adjustable shelf to keep the space flexible.
- The door body can be replaced on the right and left side.
- Ventilation design, the lowest temperature can reach -6 °C.
- Super Micro- PRO insulation layer with foam technology for a stable structure.



Model no	Dimensions (mm)	Net Volume (L)	Temp.Range (°C)	LED Light	N.W (kg)	G.W (kg)	Loading Qty20'/40'/40HQ
SC-46	425*500*512	38	0~10	1	23	26	152/320/320
SC-66	425*500*712	60	0~10	1	28	31	114/240/240
SC-96	470*520*851	85	0~10	1	33	36	54/120/180
SC-126	600*520*851	122	0~10	1	37	40	54/114/171

VERTICAL FREEZER

Standard Features:

- Light box on top to enhance display effect.
- Vertical LED lighting saves space and leaves no dead space.
- Use hot air defrost technology, more safe and energy saving.
- High quality brand compressor, fluorine-free environmentally friendly refrigerant, lower energy consumption.
- Adjustable shelf height, higher space utilization.
- Air cooling design, the temperature in the cabinet can be below - 20°C.
- Super micro PRO thermal insulation layer foam technology, scientific and stable structure.



Model no	Dimensions (mm)	Net Volume (L)	Temp.Range (°C)	LED Light	N.W (kg)	G.W (kg)	40HQ load capacity
SD-199	470*640*1900	185	-20~0	1	76	85	73
SD-239	535*640*1900	219	-20~0	1	89	99	60
SD-379	680*710*1900	372	-20~0	1	109	123	48

SLIDING DOOR DISPLAY REFRIGERATOR

Standard Features:

- Double door sliding design, space saving, good display effect.
- Rear powerful fan, 360° climate circulation, fast cooling, uniform temperature, no condensation.
- Vertical LED lighting, integrated switch control, space saving, no dead corners for lighting.
- High quality brand compressor, fluorine-free, environmentally friendly refrigerant, low power consumption.
- The height of the shelf is adjustable and the space utilization is higher.
- The rear roller is designed for easy movement.
- Super micro PRO thermal insulation layer foaming technology, scientific and stable structure.



Model no	Dimensions (mm)	Net Volume (L)	Temp.Range (°C)	LED Light	N.W (kg)	G.W (kg)	Loading Qty20'/40'/40HQ
SC-65	600*450*800	64	0~10	2	37	40	78/164/246
SC-125	600*450*1100	119	0~10	2	45	48	78/164/164
SC-75	600*450*1400	174	0~10	2	52	55	39/82/82



Model no	Dimensions (mm)	Net Volume (L)	Temp.Range (°C)	LED Light	N.W (kg)	G.W (kg)	Loading Qty20'/40'/40HQ
SD-105	900*450*800	102	0~10	2	44	48	48/96/150
SD-245	900*550*1100	245	0~10	2	62	67	36/72/86
SD-355	900*550*1400	355	0~10	2	78	84	18/36/43

HOT AND COLD DISPALY CABINET

Standard Features:

- Coexistence of cooling and heating.
- Optional: cooling only / heating only / cold-hot mixed operation.
- Single-layer heating, double-layer heating and multi-layer heating feasible.
- Vertical LED lighting saves space and leaves no dead corners.
- Adjustable shelf for more flexibility in the room.
- Cooling for air cooling design.
- Heating for plate heating, more uniform and faster, will not take away food water.



Model no	Dimensions (mm)	Net Volume (L)	Temp.Range (°C)	LED Light	N.W (kg)	G.W (kg)	Loading Qty20'/40'/40HQ
SCH-128	515*553*1110	66	2~12 50~60	4	66	69	76/164/164
SCH-158	515*553*1230	68	2~12 50~60	4	68	72	38/82/164
SCH-188	515*553*1323	74	2~12 50~60	4	74	79	38/82/82
SCH-218	515*553*1500	81	2~12 50~60	4	81	86	38/82/82



Model no	Dimensions (mm)	Net Volume (L)	Temp.Range (°C)	LED Light	N.W (kg)	G.W (kg)	Loading Qty20'/40'/40HQ
SCH-238	515*553*1600	237	2~12 50~60	4	66	89	38/82/82
SCH-258	515*553*1700	258	2~12 50~60	4	68	93	38/82/82
SCH-278	515*553*1800	279	2~12 50~60	4	74	100	38/82/82

HOT DISPALY CABINET

Standard Features:

- Plate heating mode, uniform and rapid heating.
- Vertical LED lighting saves space and leaves no dead corners for lighting.
- Adjustable shelf height, higher space utilization.
- Plate heating does not extract moisture from vegetables and ingredients remain fresher.



Model no	Dimensions (mm)	Net Volume (L)	Temp.Range (°C)	LED Light	N.W (kg)	G.W (kg)	Loading Qty20'/40'/40HQ
SH-128	515*553*870	60	50~60	4	60	63	38/82/164
SH-158	515*553*1000	62	50~60	4	62	66	38/82/164
SH-188	515*553*1093	68	50~60	4	68	73	38/82/164
SH-218	515*553*1270	75	50~60	4	75	80	38/82/164



Model no	Dimensions (mm)	Net Volume (L)	Temp.Range (°C)	LED Light	N.W (kg)	G.W (kg)	Loading Qty20'/40'/40HQ
SH-238	515*553*1370	237	50~60	4	78	83	38/82/82
SH-258	515*553*1370	258	50~60	4	82	87	38/82/82
SH-278	515*553*1570	279	50~60	4	88	94	38/82/82

FOUR SIDE GLASS SHOWCASE



Standard Features :

- Material: Plastic + Glass or AL.
- Colour: White and Black.
- Type of glass : Double glazing.
- Cooling: Circulating air.
- Coolant: R600a.
- Temperature range: 2°C to 12°C.
- Climate class : 4.
- Drip Water evaporation.
- Automatic defrosting fuction.
- 4 Vertical Led light.
- Plastic coated height adjustable intermediate shelves.
- Voltage/Hz : 220~240V 50Hz.



GDSC-38B



GDSC-58B



GDSC-78B



GDSC-98B



GDSC-128B



GDSC-158B



GDSC-188B



GDSC-218B

Model no	External W x D x H (mm)	Internal W x D x H (mm)	Packaging W x D x H (mm)	Shelves	Net weight (kg)	Gross weight (kg)	Loading Qty 20'/40'/40HQ
GDSC-38W/GDSC-38B	434*398*714	370*330*340	485*443*755	1	32	34	189/387/387
GDSC-58W/GDSC-58B	434*398*854	370*330*480	485*443*895	2	37	39	126/258/360
GDSC-78W/GDSC-78B	434*398*1004	370*330*630	485*443*1045	2	42	45	126/258/258
GDSC-98W/GDSC-98B	434*398*1154	370*330*780	485*443*1195	3	48	51	126/258/258



Model no	External W x D x H (mm)	Internal W x D x H (mm)	Packaging W x D x H (mm)	Shelves	Net weight (kg)	Gross weight (kg)	Loading Qty 20'/40'/40HQ
GDSC-128W/GDSC-128B	515*553*1100	449*486*617	566*598*1145	2	59	62	76/164/164
GDSC-158W/GDSC-158B	515*553*1230	449*486*747	566*598*1275	3	62	66	38/82/164
GDSC-188W/GDSC-188B	515*553*1323	449*486*840	566*598*1368	2	68	73	38/82/82
GDSC-218W/GDSC-218B	515*553*1500	449*486*1017	566*598*1545	3	73	78	38/82/82



FOUR SIDE GLASS SHOWCASE



Standard Features :

- Material: Plastic + Glass or AL.
- Colour: White and Black.
- Type of glass : Double glazing.
- Cooling: Circulating air.
- Coolant: R600a.
- Temperature range: 2°C to 12°C.
- Climate class : 4.
- Drip Water evaporation.
- Automatic defrosting fuction.
- 4 Vertical Led light.
- Plastic coated height adjustable intermediate shelves.
- Voltage/Hz : 220~240V 50Hz.



GDSC-238B



GDSC-258B



GDSC-278B

Model no	External W x D x H (mm)	Internal W x D x H (mm)	Packaging W x D x H (mm)	Shelves	Net weight (kg)	Gross weight (kg)	Loading Qty 20'/40'/40HQ
GDSC-238W/GDSC-238B	515*553*1600	449*486*1117	566*598*1645	4	76	81	38/82/82
GDSC-258W/GDSC-258B	515*553*1700	449*486*1217	566*598*1745	5	80	85	38/82/82
GDSC-278W/GDSC-278B	515*553*1800	449*486*1317	566*598*1845	5	86	91	38/82/82



Standard Features :

- Material: Plastic + Glass or AL.
- Colour: White and Black.
- Type of glass : Double glazing.
- Cooling: Circulating air.
- Coolant: R600a.
- Temperature range: 2°C to 12°C.
- Climate class : 4.
- Drip Water evaporation.
- Automatic defrosting fuction.
- 4 Vertical Led light.
- Plastic coated height adjustable intermediate shelves.
- Voltage/Hz : 220~240V 50Hz.
- With front and back two doors.



GDSC-103FW



GDSC-63FW



GDSC-83FW

Model no	External W x D x H (mm)	Internal W x D x H (mm)	Packaging W x D x H (mm)	Shelves	Net weight (kg)	Gross weight (kg)	Loading Qty 20'/40'/40HQ
GDSC-63FW/GDSC-63FB	434*446*854	370*356*486	485*356*895	2	39	41	100/200/300
GDSC-83FW/GDSC-83FB	434*446*1004	370*356*636	485*356*1045	3	44	46	100/200/200
GDSC-103FW/GDSC-103FB	434*446*1154	370*356*786	485*356*1195	4	51	54	100/200/200



MILK REFRIGERATOR WITH CUP WARMER



Standard Features:

- Digital temperature controller.
- Touch panel operation and digital display.
- Milk cooling with cup warmer on top.
- Independent selection of internal light control.
- Glass door with hidden handle.
- Reserved opening for milk shake machine straw.
- Tempered glass and stainless steel.




Static cooling system

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Climate	Coolant	N.W (kg)
RW-15	300*525*640	15	2~8	4	R134a/ R600a	35

DISPLAY SHOWCASE

Standard Features:

- Brilliant internal LED illumination on sides.
- Digital temperature controller and display.
- Cooling system on top.
- 4 adjustable chrome plated shelves.
- Front flat glass door.
- 4 sides triple glass.
- 4 castors, 2 with brakes.
- Automatic defrost.

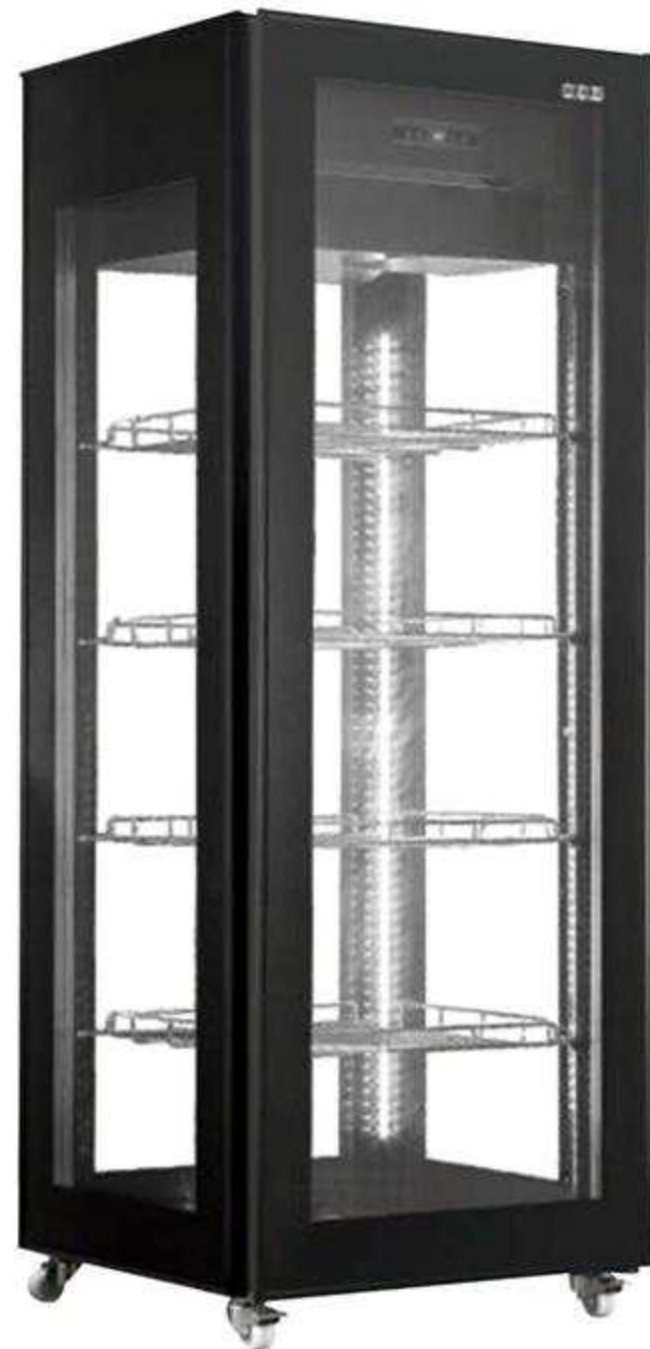

Ventilated cooling system

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Climate	Coolant	N.W (kg)
DC-400L-2	656*653*1892	400	2~8	4	R290	181

WINE COOLER



Standard Features:

- Brilliant Internal LED illumination on sides.
- Digital temperature controller and display.
- Cooling system on top.
- Wine shelf.
- 4 sides triple glass.
- 4 Castors, 2 with brakes.
- Automatic defrost.

Optional:

- Front flat glass door or curved glass door.



Ventilated cooling system

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Climate	Coolant	N.W (kg)
WN-400L-2	656*653*1892	81 pcs	5~18	4	R290	181

Standard Features:

- Internal LED illumination.
- Digital temperature controller and display.
- Automatic return door.
- 8K mirror surface stainless steel.
- Automatic water evaporation.
- Tempered glass.
- Black titanium material.
- Stainless Steel win shelves.

Optional:

- Adjustable shelves.



Ventilated cooling system

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Climate	Coolant	N.W (kg)
WN-645L	1070*550*2400	645L	8~15	4	R290	300
WN-1005L	1600*550*2400	1005L	8~15	4	R290	380



DISPLAY SHOWCASE



Standard Features:

- Brilliant internal LED illumination on sides.
- Digital temperature controller and display.
- Adjustable chrome plated shelves.
- Front flat glass door.
- 4 sides triple glass.
- 4 castors, 2 with brakes.
- Automatic defrost.



Ventilated cooling system

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Climate	Coolant	N.W (kg)
DS-270L	650*650*1500	270	0~12	4	R134a/R290	130
DS-350L	850*650*1500	350	0~12	4	R134a/R290	152
DS-400L	650*650*1908	400	0~12	4	R134a/R290	161
DS-550L	850*650*1908	550	0~12	4	R134a/R290	192

FREEZER SHOWCASE

Standard Features:

- Brilliant Internal LED illumination on sides.
- Digital temperature controller and display.
- Adjustable chrome plated shelves.
- 4 Sides three layers glass.
- Ventilated cooling system.
- Automatic defrost.
- Adjustable base feet.



Ventilated cooling system

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Climate	Coolant	N.W (kg)
FS-270L	650*650*1500	270	-13~-22	4	R404a	167
FS-350L	850*650*1500	350	-13~-22	4	R404a	192
FS-400L	650*650*1908	400	-13~-22	4	R404a	210
FS-550L	850*650*1908	550	-13~-22	4	R404a	225

ICE CREAM DISPLAY



Standard Features:

- Digital temperature controller and display.
- 4x5L pan or 8x1/6 pan.
- Automatic defrost.
- Floding flat / curved glass cover.
- On/off switch.
- Adjustable feet.



Static cooling system

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Climate	Coolant	N.W (kg)
GD-67L	805*666*356	67	-18~-25	4	R134a/R290	34.5
GD-77L	805*666*305	77	-18~-25	4	R134a/R290	38
GD-77L-2	805*666*358	77	-18~-25	4	R134a/R290	28
GD-87L	867*735*373	87	-18~-25	4	R290	45




CHOCOLATE SHOWCASE



Standard Features:

- Hermetic compressor, high refrigeration capacity, low consumption and low noise levels.
- Ventilated cooling system, cooling fast, ensure the internal temperature stable.
- Automatic defrosting system, short defrosting time, to ensure the stable taste of the inside ice cream.
- Double hollow tempered glass with heating element, works well in high humidity environment.
- Right angle modeling, top glass can be placed menu, cups and other items.

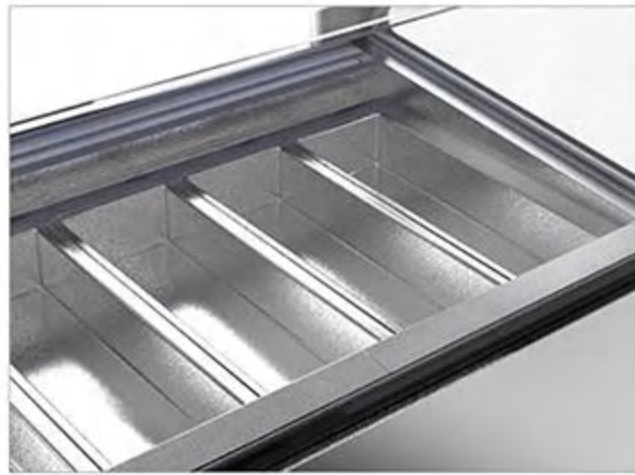

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Coolant	Pan	Power (w)
GN-6RV	1260*740*1373	160	-18~-22	R404a	6	1100
GN-7RV	1435*740*1373	175	-18~-22	R404a	7	1160
GN-8RV	1610*740*1373	195	-18~-22	R404a	8	1180
GN-9RV	1785*740*1373	215	-18~-22	R404a	9	1200
GN-12RV	1260*1045*1373	300	-18~-22	R404a	12	1200
GN-14RV	1435*1045*1373	349	-18~-22	R404a	14	1260
GN-16RV	1610*1045*1373	382	-18~-22	R404a	16	1280
GN-18RV	1785*1045*1373	425	-18~-22	R404a	18	1300

CHOCOLATE SHOWCASE

Standard Features:

- Fast defogging speed, effective removal of fog, to maintain a clear view inside the display cabinet.
- Panoramic design, can increase the display of goods.
- Microcomputer precise temperature control.
- High-strength double-layer hollow glass, strong and durable.
- Full copper tube evaporator.
- High efficiency of heat dissipation.

Optional:

- Other colors / steel.
- Customizable.



Ventilated system | Sliding door

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Coolant	Drawers	Doors
900XD-CT	900*850*1175	480	2~8	R290	2	2
1000XD-CT	1000*850*1175	535	2~8	R290	2	2
1200XD-CT	1200*850*1175	650	2~8	R290	3	2
1500XD-CT	1500*850*1175	815	2~8	R290	3	2
1800XD-CT	1800*850*1175	985	2~8	R290	4	2

CAKE SHOWCASE



Standard Features:

- Adjustable shelves * 2 layers / 3 layers.
- Brand compressor.
- Digital controller.
- Insulating glass.
- Black pre-painted steel base.
- Led light inside.
- Integrated black door frame.



GN-900R2-J



GN-900R3-J

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Coolant	Shelves	Power (w)
GN-900R2-J	900*660*1200	150	2~8	R290	2	445
GN-1000R2-J	1000*660*1200	170	2~8	R290	2	455
GN-1200R2-J	1200*660*1200	200	2~8	R290	2	465
GN-1500R2-J	1500*660*1200	255	2~8	R290	2	625
GN-1800R2-J	1800*660*1200	310	2~8	R290	2	715
GN-900R3-J	900*660*1200	165	2~8	R290	3	460
GN-1000R3-J	1000*660*1200	185	2~8	R290	3	470
GN-1200R3-J	1200*660*1300	220	2~8	R290	3	480
GN-1500R3-J	1500*660*1200	270	2~8	R290	3	640
GN-1800R3-J	1800*660*1200	330	2~8	R290	3	730



GN-900C2-J



GN-900C3-J

Model no	Dimensions (mm)	Capacity (L)	Temp.(°C)	Coolant	Shelves	Power (w)
GN-900C2-J	900*660*1200	145	2~8	R290	2	445
GN-1000C2-J	1000*660*1200	165	2~8	R290	2	455
GN-1200C2-J	1200*660*1200	195	2~8	R290	2	465
GN-1500C2-J	1500*660*1200	250	2~8	R290	2	625
GN-1800C2-J	1800*660*1200	305	2~8	R290	2	715
GN-900C3-J	900*660*1300	160	2~8	R290	3	460
GN-1000C3-J	1000*660*1300	180	2~8	R290	3	470
GN-1200C3-J	1200*660*1300	215	2~8	R290	3	480
GN-1500C3-J	1500*660*1300	265	2~8	R290	3	640
GN-1800C3-J	1800*660*1300	325	2~8	R290	3	730

FREEZER





CHEST FREEZER



Standard Features:

- European super low energy consumption.
- 70mm thickness insulation for BD105 - BD255.
- 75mm thickness insulation for BD350 - BD650.
- Suitable for wide climate, SN/T.
- Adjustable thermostat.
- Main power indicator.
- Defrost water drain hole.
- Recess handle on front side.
- Adjustable feet.
- Environmentally friendly coolant.
- Available in white or silver body color.

Optional:

- Interior LED light.
- Full baskets / digital thermometer.
- Top S/S lid.
- Outside condensor.
- Casters.



BD-105

Static system | 70mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Climate	Temp.(°C)	Baskets No.	Coolant	40"loading Quantity
BD-105	580*560*840	97	ST	≤-18	1	R600a	223
BD-155	775*560*840	148	ST	≤-18	1	R600a	168
BD-205	960*560*840	197	ST	≤-18	1	R600a	138
BD-255	1164*560*840	247	ST	≤-18	1	R600a	109

Static system | 75mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Climate	Temp.(°C)	Baskets No.	Coolant	40"loading Quantity
BD-350	1030*765*840	280	ST	≤-18	1	R600a	96
BD-450	1270*765*840	370	ST	≤-18	2	R600a	79
BD-550	1530*765*840	465	ST	≤-18	2	R600a	65
BD-650	1810*765*840	568	ST	≤-18	2	R600a	56

Standard Features:

- 80 mm thickness insulation.
- Two lids as standard.
- Adjustable thermostat.
- Main power indicator.
- Defrost water drain hole.
- External handle with lock.
- Two baskets inside.
- Adjustable feet.
- Environmentally friendly coolant.

Optional:

- Interior LED light.
- Full baskets / digital thermometer.
- Top S/S lid.
- Outside condensor.
- Casters.



BD-700D

Static system | 80mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Climate	Temp.(°C)	Baskets No.	Coolant	40"loading Quantity
BD-700D	2000*740*850	670	ST	≤-18	2	R290	51
BD-900D	1930*895*910	850	ST	≤-18	2	R290	24
BD-1000D	2280*895*910	945	ST	≤-18	2	R290	24



CHEST FREEZER

FLAT GLASS TOP

Standard Features:

- Easily open from Front or back side.
- Adjustable thermostat.
- Main power indicator.
- Defrost water drain hole.
- Sandblasting oxidation surface.
- treatment PVC frame.
- Three-dimensional electronic thermostat, accurate temperature control, highlighting the generousness.
- Adjustable feet.
- Environmentally friendly coolant.

Optional:

- Wheels/ Full baskets/ digital thermometer.



SD-100



SD-320P

Static system | 70mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Climate	Temp.(°C)	Baskets No.	Coolant	40"loading Quantity
SD-100	585*525*840	97	ST	≤-18	1	R600a	223
SD-200	960*525*840	197	ST	≤-18	1	R600a	135

Static system | 75mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Climate	Temp.(°C)	Baskets No.	Coolant	40"loading Quantity
SD-320P	1030*680*850	273	N/ST	≤-18	3	R290	98
SD-420P	1270*680*850	355	N/ST	≤-18	4	R290	79
SD-520P	1530*680*850	445	N/ST	≤-18	5	R290	65
SD-620P	1810*680*850	545	N/ST	≤-18	6	R290	56

CHEST FREEZER

SLIDING CURVED GLASS LID

Standard Features:

- New style curved sliding glass lid.
- Exterior white finish.
- Door Frame (two sides): Dark grey plastic.
- Door Frame (Middle up and bottom) : silver aluminum.
- Inside cabiner walls: white PCM aluminum.
- Adjustable thermostat.
- Main power indicator.
- Defrost water drain hole.
- Full basket as standard.
- Interior LED light as standard.
- Four caster wheels.
- Environmentally friendly coolant.



SD-320Q



SD-620Q

Static system | 70mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Climate	Temp.(°C)	Baskets No.	Coolant	40"loading Quantity
SD-220Q	740*680*850	180	N/ST	≤-18	2	R290	134
SD-320Q	1030*680*850	273	N/ST	≤-18	3	R290	97
SD-420Q	1270*680*850	355	N/ST	≤-18	4	R290	79
SD-520Q	1530*680*850	445	N/ST	≤-18	5	R290	65
SD-620Q	1810*680*850	545	N/ST	≤-18	6	R290	56
SD-720Q	2000*680*850	615	N/ST	≤-18	7	R290	50



CHEST FREEZER

SINGLE CURVED SLIDING GLASS TOP WITH DRAWERS

Standard Features:

- High COP compressor for non-CFC refrigerant.
- Superior cooling performance of -25°C below the loading line.
- Dual evaporator system.
- Unique drawer design, for the easy recycle of the merchandise from the drawer to the cabinet.
- Electronic temperature control.
- Removable compressor base for easy maintenance.
- 2 pieces curved tempered glass lid with low-E, left and right sliding, for easy access to the inside merchandise.
- Standard interior illumination of 1 piece LED strip.
- Precoated galvanized steel exterior liner.
- 6 wheels, front 2 wheels with brake, back 4 swivel wheels.



FS-750

Static system | 70mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Climate	Temp.(°C)	Baskets No.	Coolant	40"loading Quantity
FS-750	1996*750*850	635	4	≤-25	7	R404a/R290	26

CHEST FREEZER

DOUBLE CURVED SLIDING GLASS TOP WITH DRAWERS

Standard Features:

- High COP compressor for non-CFC refrigerant.
- Superior cooling performance of -25°C below the loading line.
- Dual evaporator system.
- Unique drawer design, for the easy recycle of the merchandise from the drawer to the cabinet.
- Electronic temperature control.
- Removable compressor base for easy maintenance.
- 6 pieces curved tempered glass lid with low-E, up and down sliding, for easy access to the inside merchandise.
- Standard interior illumination of 1 piece LED strip.
- 6 wheels, front 2 wheels with brake, back 4 swivel wheels.



FS-700

Static system | 65mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Climate	Temp.(°C)	Baskets No.	Coolant	40"loading Quantity
FS-700	1750*800*925	630	4	≤-25	14	R404a/R290	26
FS-800	2000*800*925	740	4	≤-25	16	R404a/R290	26

CHEST FREEZER

FLAT GLASS TOP WITH DRAWERS

Standard Features:

- High COP compressor for non-CFC refrigerant.
- Superior cooling performance of -25°C below the loading line
- Dual evaporator system.
- Unique drawer design, for the easy recycle of the merchandise from the drawer to the cabinet.
- Electronic temperature control.
- Removable compressor base for easy maintenance.
- 2 pieces curved tempered glass lid with low-E, left and right sliding, for easy access to the inside merchandise.
- Standard interior illumination of 1 piece LED strip.
- Precoated galvanized steel exterior liner.



FS-850

Static system | 63mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Climate	Temp.(°C)	Baskets No.	Coolant	40"loading Quantity
FS-850	2000*800*860	660	4	≤-25	7	R404a/R290	26

CHEST FREEZER

DOUBLE SIDES SLIDING GLASS TOP

Standard Features:

- High COP compressor & Non-CFC refrigerant.
- Electronic temperature control.
- Free from maintenance ventilated motor fan for condenser& compressor.
- 4 pieces curved tempered glass lids with low-E, dounle sides left and right sliding.
- Standard interior LED illumination.
- White precoated galvanized steel exterior liner.
- Embossed aluminum interior liner.
- Integrated plastic cabinet frame.



SDQ-1100

Static system | 70mm foaming thickness

Model no	Dimensions (mm)	Net capacity (L)	Climate	Temp.(°C)	Baskets No.	Coolant	40"loading Quantity
SDQ-1100	2000*1000*850	945	4 (30°C / 55%)	≤-18	7	R290 / R404a	20

ICE MAKER





BULLET ICE MAKER



BIM-20



BIM-26/BIM-50

Model no	Dimensions (mm)	Output/ 24h (kg)	Ice Storage (kg)	Power (w)	G.W (kg)
BIM-20	330*503*607	24	5	220	28
BIM-26	398*542*682	28	7	240	31
BIM-50	398*542*682	50	7	380	31



CIM-30/CIM-40



CIM-50

Model no	Dimensions (mm)	Output/ 24h (kg)	Ice Storage (kg)	Power (w)	G.W (kg)
CIM-30	378*420*615	30	10	150	22
CIM-40	378*420*615	40	10	190	22
CIM-50	398*546*720	50	15	285	29



BIM-25C/BIM-35C



BIM-55C/BIM-75C

Model no	Dimensions (mm)	Output/ 24h (kg)	Ice Storage (kg)	Power (w)	G.W (kg)
BIM-25C	375*553*762	25	15	330	43
BIM-35C	375*553*762	35	15	350	43
BIM-55C	666*637*775	55	30	500	71
BIM-75C	666*637*775	75	30	670	72



Model no	Dimensions (mm)	Output/ 24h (kg)	Ice Storage (kg)	Power (w)	G.W (kg)
CIM-50B	666*637*775	50	30	465	50
CIM-80B	666*637*775	80	30	610	65
CIM-100B	666*637*775	100	30	640	67



CUBE ICE MACHINE



Vertical Type



Model no	Dimension (inch)	Output/ 24h (lbs)	Ice Storage (lbs)	Power (w)	G.W (lbs)
IM-89S	19.69*17.72*33.46	80	33	350	88
IM-129S	19.69*23.23*35.43	120	40	446	110
IM-169S	25.99*27.83*38.18	160	80	451	143
IM-219S	25.99*27.83*38.18	210	80	526	145
IM-289S	25.99*27.83*38.18	180	80	726	147

Modular Type



Model no	Dimension (inch)	Output/ 24h (lbs)	Ice Storage (lbs)	Power (w)	G.W (lbs)
IM-329	22.05*32.76*67.52	350	275	790	205
IM-529	22.05*32.76*67.52	500	375	1113	264



ICE & WATER DISPENSER

DISPENSES EITHER ICE OR WATER OR BOTH

Standard Features:

- Produces individual crystal clear ice cube without dimple.
- Trouble free operation with a choice of ice, water and ice or just water.
- Up to 14/24kg production per day.
- Up to 2/3kg storage capacity.
- Stainless steel body with reinforced industrial grade plastic.
- Intelligence with multi electromechanic functionality controls.
- Superior energy efficiency.
- Automatic water cleaning.
- Hygenic design with minimal risk of contamination.
- Removable and washable air filter.
- Adjustable and removable legs.
- Complete with water & drain hoses.
- CFC-free Refrigerant.



GDZBY15



GDZBY25

Model no	Ice production 24h (kg)	Storage capacity (kg)	Average power consumption (w)	Dimension (mm)	N.G (kg)	W.G (kg)	40"loading Quantity
GDZBY15	15	2	180	550*230*680	28	30	456
GDZBY25	25	3	240	550*350*680	28	30	324

COMPACT ICE MAKER



GDZB28



GDZBF20

Model no	Ice production 24h (kg)	Storage capacity (kg)	Average power consumption (w)	Dimension (mm)	N.G (kg)	W.G (kg)	40"loading Quantity
GDZB28	6	11	90	380*450*625	23	25	512
GDZBF20	20	6	140	380*470*600	28	30	512

STAINLESS STEEL FURNITURE





STAINLESS STEEL WORK TABLE



Work table without backsplash

600 mm WIDTH	
Model no	L x H mm
GDATS66-1	600 x 850
GDATS76-1	700 x 850
GDATS86-1	800 x 850
GDATS106-1	1000 x 850
GDATS126-1	1200 x 850
GDATS146-1	1400 x 850
GDATS156-1	1500 x 850
GDATS166-1	1600 x 850
GDATS186-1	1800 x 850
GDATS206-1	2000 x 850

700 mm WIDTH	
Model no	L x H mm
GDATS67-1	600 x 850
GDATS77-1	700 x 850
GDATS87-1	800 x 850
GDATS107-1	1000 x 850
GDATS127-1	1200 x 850
GDATS147-1	1400 x 850
GDATS157-1	1500 x 850
GDATS167-1	1600 x 850
GDATS187-1	1800 x 850
GDATS207-1	2000 x 850



Work table without backsplash

600 mm WIDTH	
Model no	L x H mm
GDATS66	600 x 850
GDATS76	700 x 850
GDATS86	800 x 850
GDATS106	1000 x 850
GDATS126	1200 x 850
GDATS146	1400 x 850
GDATS156	1500 x 850
GDATS166	1600 x 850
GDATS186	1800 x 850
GDATS206	2000 x 850

700 mm WIDTH	
Model no	L x H mm
GDATS67	600 x 850
GDATS77	700 x 850
GDATS87	800 x 850
GDATS107	1000 x 850
GDATS127	1200 x 850
GDATS147	1400 x 850
GDATS157	1500 x 850
GDATS167	1600 x 850
GDATS187	1800 x 850
GDATS207	2000 x 850



Work table with backsplash

600 mm WIDTH	
Model no	L x H mm
GDATS66A-1	600 x 950
GDATS76A-1	700 x 950
GDATS86A-1	800 x 950
GDATS106A-1	1000 x 950
GDATS126A-1	1200 x 950
GDATS146A-1	1400 x 950
GDATS156A-1	1500 x 950
GDATS166A-1	1600 x 950
GDATS186A-1	1800 x 950
GDATS206A-1	2000 x 950

700 mm WIDTH	
Model no	L x H mm
GDATS67A-1	600 x 950
GDATS77A-1	700 x 950
GDATS87A-1	800 x 950
GDATS107A-1	1000 x 950
GDATS127A-1	1200 x 950
GDATS147A-1	1400 x 950
GDATS157A-1	1500 x 950
GDATS167A-1	1600 x 950
GDATS187A-1	1800 x 950
GDATS207A-1	2000 x 950





Work table with backsplash

600 mm WIDTH	
Model no	L x H mm
GDATS66A	600 x 950
GDATS76A	700 x 950
GDATS86A	800 x 950
GDATS106A	1000 x 950
GDATS126A	1200 x 950
GDATS146A	1400 x 950
GDATS156A	1500 x 950
GDATS166A	1600 x 950
GDATS186A	1800 x 950
GDATS206A	2000 x 950

700 mm WIDTH	
Model no	L x H mm
GDATS67A	600 x 950
GDATS77A	700 x 950
GDATS87A	800 x 950
GDATS107A	1000 x 950
GDATS127A	1200 x 950
GDATS147A	1400 x 950
GDATS157A	1500 x 950
GDATS167A	1600 x 950
GDATS187A	1800 x 950
GDATS207A	2000 x 950

CORNER WORK TABLE

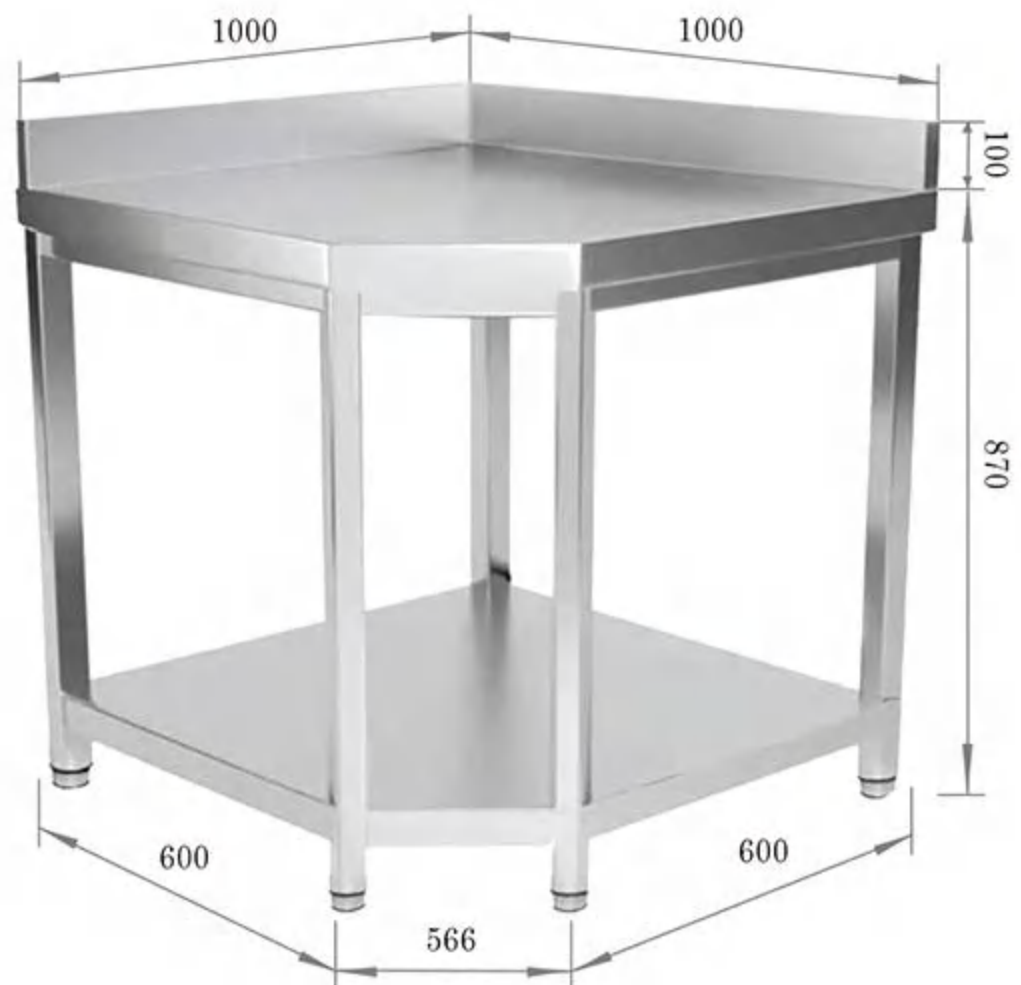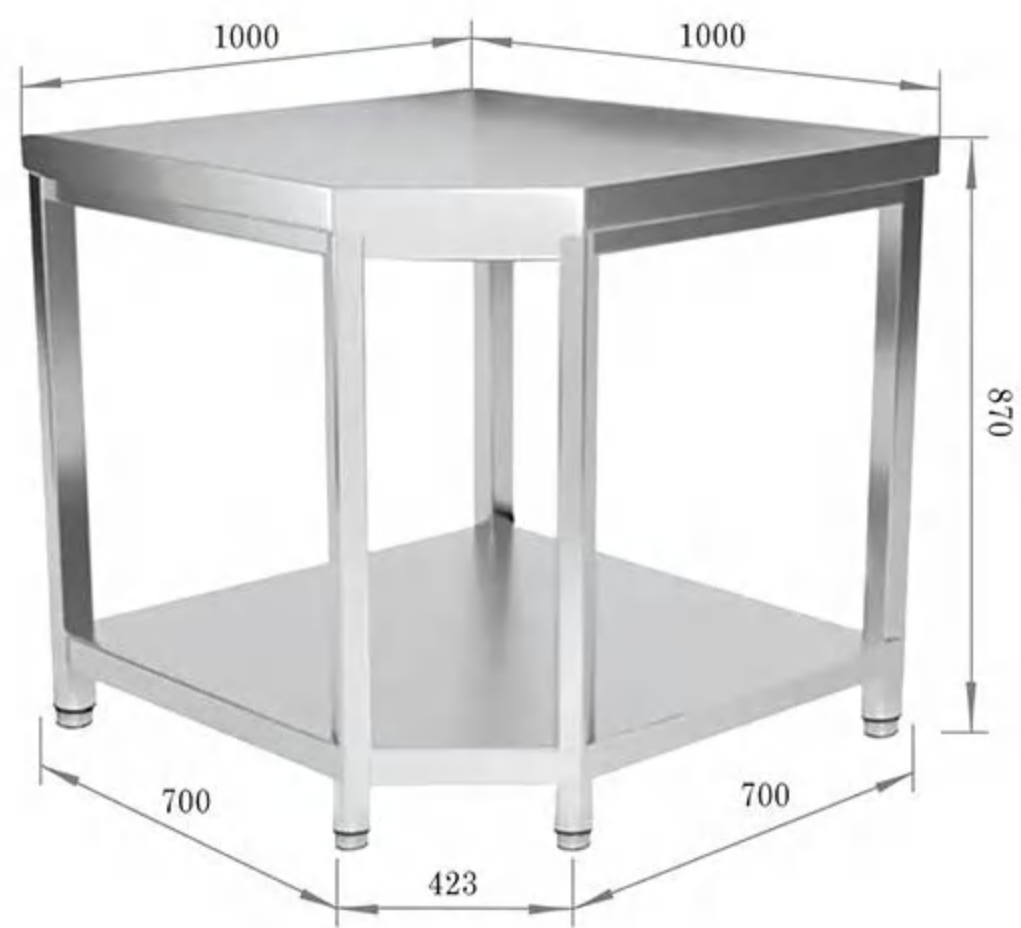

Work table without backsplash

600 mm WIDTH	
Model no	L x W x H mm
GDATC66	1000 x 600 x 850

700 mm WIDTH	
Model no	L x W x H mm
GDATC66	1000 x 700 x 850

Work table with backsplash

600 mm WIDTH	
Model no	L x W x H mm
GDATC66A	1000 x 600 x 950

700 mm WIDTH	
Model no	L x W x H mm
GDATS67A-1	1000 x 700 x 950

FOLDING WORK TABLE



Work table without backsplash

600 mm WIDTH	
Model no	L x W x H mm
GDFWT86	800 x 600 x 850
GDFWT106	1000 x 600 x 850
GDFWT126	1200 x 600 x 850
GDFWT146	1400 x 600 x 850
GDFWT156	1500 x 600 x 850

700 mm WIDTH	
Model no	L x W x H mm
GDFWT87	800 x 700 x 850
GDFWT107	1000 x 700 x 850
GDFWT127	1200 x 700 x 850
GDFWT147	1400 x 700 x 850
GDFWT157	1500 x 700 x 850

ACCESSORIES



Set of casters for work tables
• 1 set with 4 wheels, 2 with brake



Intermediate shelf for work table
• Width: 600mm and 700mm
• Length from 600mm to 2000mm



STAINLESS STEEL WORK TABLE



Standard series work table

18 Gauge 430 stainless steel top with galvanized undershelf & galvanized legs.

24 inch WIDTH		30 inch WIDTH	
Model no	L x W x H inch	Model no	L x W x H inch
UWTF-2424	24"x24"x34"	UWTF-3024	24"x30"x34"
UWTF-2430	30"x24"x34"	UWTF-3030	30"x30"x34"
UWTF-2436	36"x24"x34"	UWTF-3036	36"x30"x34"
UWTF-2448	48"x24"x34"	UWTF-3048	48"x30"x34"
UWTF-2460	60"x24"x34"	UWTF-3060	60"x30"x34"
UWTF-2472	72"x24"x34"	UWTF-3072	72"x30"x34"



Standard series work table with casters

18 Gauge 430 stainless steel top with galvanized undershelf & galvanized legs.

24 inch WIDTH		30 inch WIDTH	
Model no	L x W x H inch	Model no	L x W x H inch
UWTFC-2424	24"x24"x34"	UWTFC-3024	24"x30"x34"
UWTFC-2430	30"x24"x34"	UWTFC-3030	30"x30"x34"
UWTFC-2436	36"x24"x34"	UWTFC-3036	36"x30"x34"
UWTFC-2448	48"x24"x34"	UWTFC-3048	48"x30"x34"
UWTFC-2460	60"x24"x34"	UWTFC-3060	60"x30"x34"
UWTFC-2472	72"x24"x34"	UWTFC-3072	72"x30"x34"

84" and 96" with 6 legs



Standard series work table with backsplash

18 Gauge 430 stainless steel top with galvanized undershelf & galvanized legs.

24 inch WIDTH		30 inch WIDTH	
Model no	L x W x H inch	Model no	L x W x H inch
UWTB-2424	24"x24"x34"	UWTB-3024	24"x30"x34"
UWTB-2430	30"x24"x34"	UWTB-3030	30"x30"x34"
UWTB-2436	36"x24"x34"	UWTB-3036	36"x30"x34"
UWTB-2448	48"x24"x34"	UWTB-3048	48"x30"x34"
UWTB-2460	60"x24"x34"	UWTB-3060	60"x30"x34"
UWTB-2472	72"x24"x34"	UWTB-3072	72"x30"x34"



Standard series work table with backsplash & Casters

18 Gauge 430 stainless steel top with galvanized undershelf & galvanized legs.

24 inch WIDTH		30 inch WIDTH	
Model no	L x W x H inch	Model no	L x W x H inch
UWTBC-2424	24"x24"x34"	UWTBC-3024	24"x30"x34"
UWTBC-2430	30"x24"x34"	UWTBC-3030	30"x30"x34"
UWTBC-2436	36"x24"x34"	UWTBC-3036	36"x30"x34"
UWTBC-2448	48"x24"x34"	UWTBC-3048	48"x30"x34"
UWTBC-2460	60"x24"x34"	UWTBC-3060	60"x30"x34"
UWTBC-2472	72"x24"x34"	UWTBC-3072	72"x30"x34"

STAINLESS STEEL FILLER TABLE



Stainless steel filler table

18 Gauge 430 stainless steel top with galvanized undershelf & galvanized legs.

24 inch WIDTH		30 inch WIDTH	
Model no	L x W x H inch	Model no	L x W x H inch
UFT-2412	12"x24"x34"	UFT-3012	12"x30"x34"
UFT-2415	15"x24"x34"	UFT-3015	15"x30"x34"
UFT-2418	18"x24"x34"	UFT-3018	18"x30"x34"
UFT-2424	24"x24"x34"	UFT-3024	24"x30"x34"



Stainless steel filler table with open base

18 Gauge 430 stainless steel top with galvanized undershelf & galvanized legs.

24 inch WIDTH		30 inch WIDTH	
Model no	L x W x H inch	Model no	L x W x H inch
UFTO-2412	12"x24"x34"	UFTO-3012	12"x30"x34"
UFTO-2415	15"x24"x34"	UFTO-3015	15"x30"x34"
UFTO-2418	18"x24"x34"	UFTO-3018	18"x30"x34"
UFTO-2424	24"x24"x34"	UFTO-3024	24"x30"x34"



Stainless steel equipment stands

18 Gauge 430 stainless steel.

24 inch WIDTH		30 inch WIDTH	
Model no	L x W x H inch	Model no	L x W x H inch
UES-2424	24"x24"x24"	UES-3024	24"x30"x24"
UES-2436	36"x24"x24"	UES-3036	36"x30"x24"
UES-2448	48"x24"x24"	UES-3048	48"x30"x24"
UES-2460	60"x24"x24"	UES-3060	60"x30"x24"
UES-2472	72"x24"x24"	UES-3072	72"x30"x24"

72" with 6 legs



Standard series work table

18 Gauge 430 stainless steel top with galvanized undershelf & galvanized legs.

24 inch WIDTH		30 inch WIDTH	
Model no	L x W x H inch	Model no	L x W x H inch
UWTF-2484	84"x24"x34"	UWTF-3084	84"x30"x34"
UWTF-2496	96"x24"x34"	UWTF-3096	96"x30"x34"



SLINDING DOOR WORK CABINET



Sliding door work cabinet without backsplash

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDASR66	600 x 850	GDASR67	600 x 850
GDASR86	800 x 850	GDASR87	800 x 850
GDASR106	1000 x 850	GDASR107	1000 x 850
GDASR126	1200 x 850	GDASR127	1200 x 850
GDASR146	1400 x 850	GDASR147	1400 x 850
GDASR156	1500 x 850	GDASR157	1500 x 850
GDASR166	1600 x 850	GDASR167	1600 x 850
GDASR186	1800 x 850	GDASR187	1800 x 850
GDASR206	2000 x 850	GDASR207	2000 x 850



Sliding door work cabinet with backsplash

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDASR66A	600 x 950	GDASR67A	600 x 950
GDASR86A	800 x 950	GDASR87A	800 x 950
GDASR106A	1000 x 950	GDASR107A	1000 x 950
GDASR126A	1200 x 950	GDASR127A	1200 x 950
GDASR146A	1400 x 950	GDASR147A	1400 x 950
GDASR156A	1500 x 950	GDASR157A	1500 x 950
GDASR166A	1600 x 950	GDASR167A	1600 x 950
GDASR186A	1800 x 950	GDASR187A	1800 x 950
GDASR206A	2000 x 950	GDASR207A	2000 x 950

HINGED DOOR WORK CABINET



Hinged door work cabinet without backsplash

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDAHR66	600 x 850	GDAHR67	600 x 850
GDAHR86	800 x 850	GDAHR87	800 x 850
GDAHR106	1000 x 850	GDAHR107	1000 x 850
GDAHR126	1200 x 850	GDAHR127	1200 x 850
GDAHR146	1400 x 850	GDAHR147	1400 x 850
GDAHR156	1500 x 850	GDAHR157	1500 x 850
GDAHR166	1600 x 850	GDAHR167	1600 x 850
GDAHR186	1800 x 850	GDAHR187	1800 x 850
GDAHR206	2000 x 850	GDAHR207	2000 x 850



Hinged door work cabinet with backsplash

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDAHR66A	600 x 950	GDAHR67A	600 x 950
GDAHR86A	800 x 950	GDAHR87A	800 x 950
GDAHR106A	1000 x 950	GDAHR107A	1000 x 950
GDAHR126A	1200 x 950	GDAHR127A	1200 x 950
GDAHR146A	1400 x 950	GDAHR147A	1400 x 950
GDAHR156A	1500 x 950	GDAHR157A	1500 x 950
GDAHR166A	1600 x 950	GDAHR167A	1600 x 950
GDAHR186A	1800 x 950	GDAHR187A	1800 x 950
GDAHR206A	2000 x 950	GDAHR207A	2000 x 950

WORK CABINET WITH HAND DRAWERS



Work cabinet with right hand drawers

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDASRRD146	1400 x 850	GDASRRD147	1400 x 850
GDASRRD156	1500 x 850	GDASRRD157	1500 x 850
GDASRRD166	1600 x 850	GDASRRD167	1600 x 850
GDASRRD186	1800 x 850	GDASRRD187	1800 x 850
GDASRRD206	2000 x 850	GDASRRD207	2000 x 850
GDASRRD226	2200 x 850	GDASRRD227	2200 x 850
GDASRRD246	2400 x 850	GDASRRD247	2400 x 850



Work cabinet with right hand drawers and backsplash

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDASRRD146A	1400 x 950	GDASRRD147A	1400 x 950
GDASRRD156A	1500 x 950	GDASRRD157A	1500 x 950
GDASRRD166A	1600 x 950	GDASRRD167A	1600 x 950
GDASRRD186A	1800 x 950	GDASRRD187A	1800 x 950
GDASRRD206A	2000 x 950	GDASRRD207A	2000 x 950
GDASRRD226A	2200 x 950	GDASRRD227A	2200 x 950
GDASRRD246A	2400 x 950	GDASRRD247A	2400 x 950



Work cabinet with left hand drawers

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDASRLD146	1400 x 850	GDASRLD147	1400 x 850
GDASRLD156	1500 x 850	GDASRLD157	1500 x 850
GDASRLD166	1600 x 850	GDASRLD167	1600 x 850
GDASRLD186	1800 x 850	GDASRLD187	1800 x 850
GDASRLD206	2000 x 850	GDASRLD207	2000 x 850
GDASRLD226	2200 x 850	GDASRLD227	2200 x 850
GDASRLD246	2400 x 850	GDASRLD247	2400 x 850



Hinged door work cabinet with backsplash

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDASRLD146A	1400 x 950	GDASRLD147A	1400 x 950
GDASRLD156A	1500 x 950	GDASRLD157A	1500 x 950
GDASRLD166A	1600 x 950	GDASRLD167A	1600 x 950
GDASRLD186A	1800 x 950	GDASRLD187A	1800 x 950
GDASRLD206A	2000 x 950	GDASRLD207A	2000 x 950
GDASRLD226A	2200 x 950	GDASRLD227A	2200 x 950
GDASRLD246A	2400 x 950	GDASRLD247A	2400 x 950

OPEN DESIGN WORK CABINET



Open design work cabinet without backsplash	
600 mm WIDTH	
Model no	L x H mm
GDASO66	600 x 850
GDASO86	800 x 850
GDASO106	1000 x 850
GDASO126	1200 x 850
GDASO146	1400 x 850
GDASO156	1500 x 850
GDASO166	1600 x 850
GDASO186	1800 x 850
GDASO206	2000 x 850
700 mm WIDTH	
Model no	L x H mm
GDASO67	600 x 850
GDASO87	800 x 850
GDASO107	1000 x 850
GDASO127	1200 x 850
GDASO147	1400 x 850
GDASO157	1500 x 850
GDASO167	1600 x 850
GDASO187	1800 x 850
GDASO207	2000 x 850



Open design work cabinet with backsplash	
600 mm WIDTH	
Model no	L x H mm
GDASO66A	600 x 950
GDASO86A	800 x 950
GDASO106A	1000 x 950
GDASO126A	1200 x 950
GDASO146A	1400 x 950
GDASO156A	1500 x 950
GDASO166A	1600 x 950
GDASO186A	1800 x 950
GDASO206A	2000 x 950
700 mm WIDTH	
Model no	L x H mm
GDASO67A	600 x 950
GDASO87A	800 x 950
GDASO107A	1000 x 950
GDASO127A	1200 x 950
GDASO147A	1400 x 950
GDASO157A	1500 x 950
GDASO167A	1600 x 950
GDASO187A	1800 x 950
GDASO207A	2000 x 950

PASS-THROUGH CABINET WITH SLIDING DOORS



Pass-through cabinet without backsplash	
600 mm WIDTH	
Model no	L x H mm
GDARD106	1000 x 850
GDARD126	1200 x 850
GDARD146	1400 x 850
GDARD156	1500 x 850
GDARD166	1600 x 850
GDARD186	1800 x 850
GDARD206	2000 x 850
700 mm WIDTH	
Model no	L x H mm
GDARD107	1000 x 850
GDARD127	1200 x 850
GDARD147	1400 x 850
GDARD157	1500 x 850
GDARD167	1600 x 850
GDARD187	1800 x 850
GDARD207	2000 x 850

HEATING CABINET



Heating cabinet	
600 mm WIDTH	
Model no	L x H mm
GDHCA106	1000 x 950
GDHCA126	1200 x 950
GDHCA146	1400 x 950
GDHCA156	1500 x 950
GDHCA166	1600 x 950
GDHCA186	1800 x 950
GDHCA206	2000 x 950
700 mm WIDTH	
Model no	L x H mm
GDHCA107	1000 x 950
GDHCA127	1200 x 950
GDHCA147	1400 x 950
GDHCA157	1500 x 950
GDHCA167	1600 x 950
GDHCA187	1800 x 950
GDHCA207	2000 x 950

CORNER CABINET




Corner cabinet without backsplash	
600 mm WIDTH	
Model no	L x W x H mm
GDARC66	1000 x 1000 x 600 x 600 x 850
700 mm WIDTH	
Model no	L x W x H mm
GDATC77	1000 x 1000 x 700 x 700 x 850



Corner cabinet with backsplash	
600 mm WIDTH	
Model no	L x W x H mm
GDARC66A	1000 x 1000 x 600 x 600 x 950
700 mm WIDTH	
Model no	L x W x H mm
GDATC77A	1000 x 1000 x 700 x 700 x 950

CORNER WALL-MOUNTED CABINET

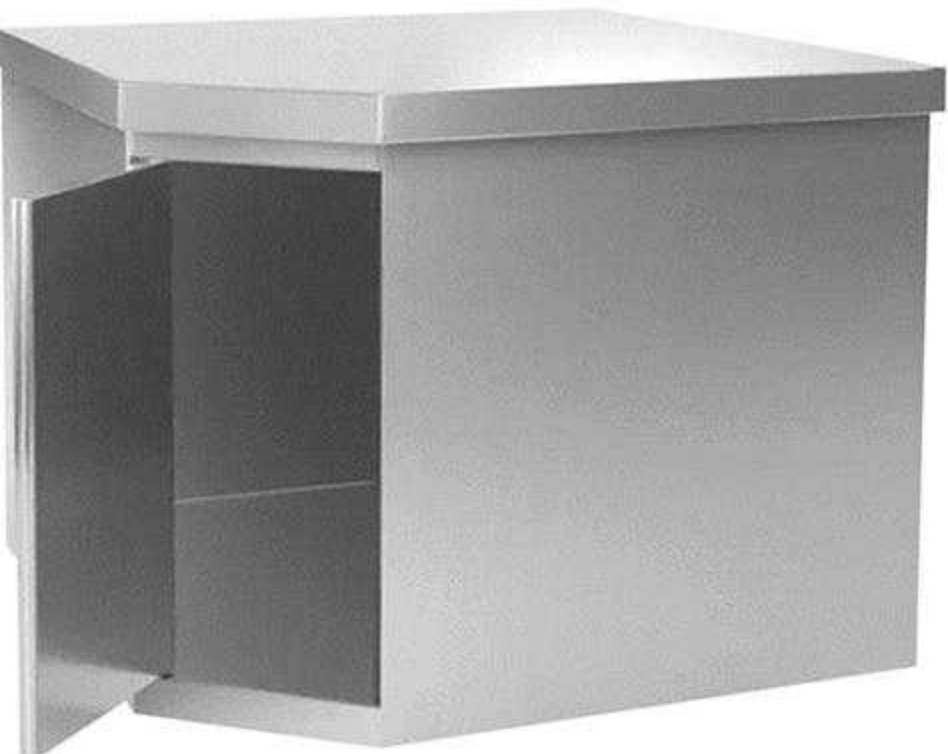

Corner wall-mounted cabinet	
600 mm WIDTH	
Model no	L x W x H mm
GDWCC66	600 x 600 x 400 x 400 x 600
700 mm WIDTH	
Model no	L x W x H mm
GDWCC77	700 x 700 x 400 x 400 x 600

WALL-MOUNTED CABINET



Wall cabinet with open design

400 mm WIDTH		
Model no	L x W x H mm	
GDWOS64	600 x 400 x 600	
GDWOS84	800 x 400 x 600	
GDWOS104	1000 x 400 x 600	
GDWOS124	1200 x 400 x 600	
GDWOS144	1400 x 400 x 600	
GDWOS154	1500 x 400 x 600	
GDWOS164	1600 x 400 x 600	
GDWOS184	1800 x 400 x 600	
GDWOS204	2000 x 400 x 600	



Wall cabinet with sliding door design

400 mm WIDTH		
Model no	L x W x H mm	
GDWCS64	600 x 400 x 600	
GDWCS84	800 x 400 x 600	
GDWCS104	1000 x 400 x 600	
GDWCS124	1200 x 400 x 600	
GDWCS144	1400 x 400 x 600	
GDWCS154	1500 x 400 x 600	
GDWCS164	1600 x 400 x 600	
GDWCS184	1800 x 400 x 600	
GDWCS204	2000 x 400 x 600	

TABLE TOP RACK



One layer work table top rack

350 mm WIDTH		
Model no	L x W x H mm	
GDTTR64	600 x 350 x 400	
GDTTR84	800 x 350 x 400	
GDTTR104	1000 x 350 x 400	
GDTTR124	1200 x 350 x 400	
GDTTR144	1400 x 350 x 400	
GDTTR164	1600 x 350 x 400	
GDTTR184	1800 x 350 x 400	
GDTTR204	2000 x 350 x 400	



Two layer work table top rack

350 mm WIDTH		
Model no	L x W x H mm	
GDTTR67	600 x 350 x 700	
GDTTR87	800 x 350 x 700	
GDTTR107	1000 x 350 x 700	
GDTTR127	1200 x 350 x 700	
GDTTR147	1400 x 350 x 700	
GDTTR167	1600 x 350 x 700	
GDTTR187	1800 x 350 x 700	
GDTTR207	2000 x 350 x 700	

BILL HOLDER



Model no	Dimension (mm)
BH360	360 x 58
BH450	450 x 58
BH600	600 x 58
BH900	900 x 58
BH1000	1000 x 58
BH1200	1200 x 58

STORAGE RACK



Stainless steel plate storage rack

500 mm / 600mm WIDTH		
Model no	L x W x H mm	
GDRGB-125	1200 x 500 x 1550	
GDRGB-155	1500 x 500 x 1550	
GDRGB-185	1800 x 500 x 1550	
GDRGB-126	1200 x 600 x 1550	
GDRGB-156	1500 x 600 x 1550	
GDRGB-186	1800 x 600 x 1550	



Stainless steel plate perforated storage rack

500 mm / 600mm WIDTH		
Model no	L x W x H mm	
GDRGBC-125	1200 x 500 x 1550	
GDRGBC-155	1500 x 500 x 1550	
GDRGBC-185	1800 x 500 x 1550	
GDRGBC-126	1200 x 600 x 1550	
GDRGBC-156	1500 x 600 x 1550	
GDRGBC-186	1800 x 600 x 1550	



Stainless steel ladder storage rack

500 mm / 600mm WIDTH		
Model no	L x W x H mm	
GDRGBL-125	1200 x 500 x 1550	
GDRGBL-155	1500 x 500 x 1550	
GDRGBL-185	1800 x 500 x 1550	
GDRGBL-126	1200 x 600 x 1550	
GDRGBL-156	1500 x 600 x 1550	
GDRGBL-186	1800 x 600 x 1550	



WALL SHELF



Wall mounted shelf		
300 mm WIDTH		
Model no	L x W x H mm	
GDFWS63	600 x 300 x 400	
GDFWS83	800 x 300 x 400	
GDFWS103	1000 x 300 x 400	
GDFWS123	1200 x 300 x 400	
GDFWS143	1400 x 300 x 400	
GDFWS163	1600 x 300 x 400	
GDFWS183	1800 x 300 x 400	
GDFWS203	2000 x 300 x 400	




Wall mounted shelf		
300 mm WIDTH		
Model no	L x W x H mm	
GDFWS63A	600 x 300	
GDFWS83A	800 x 300	
GDFWS103A	1000 x 300	
GDFWS123A	1200 x 300	
GDFWS143A	1400 x 300	



One layer adjustable wall shelf		
300 mm WIDTH		
Model no	L x W x H mm	
GD1AWS63	600 x 300 x 400	
GD1AWS83	800 x 300 x 400	
GD1AWS103	1000 x 300 x 400	
GD1AWS123	1200 x 300 x 400	
GD1AWS143	1400 x 300 x 400	
GD1AWS163	1600 x 300 x 400	
GD1AWS183	1800 x 300 x 400	
GD1AWS203	2000 x 300 x 400	



Wall mounted shelf		
300 mm WIDTH		
Model no	L x W x H mm	
GDFWS63B	600 x 300	
GDFWS83B	800 x 300	
GDFWS103B	1000 x 300	
GDFWS123B	1200 x 300	
GDFWS143B	1400 x 300	

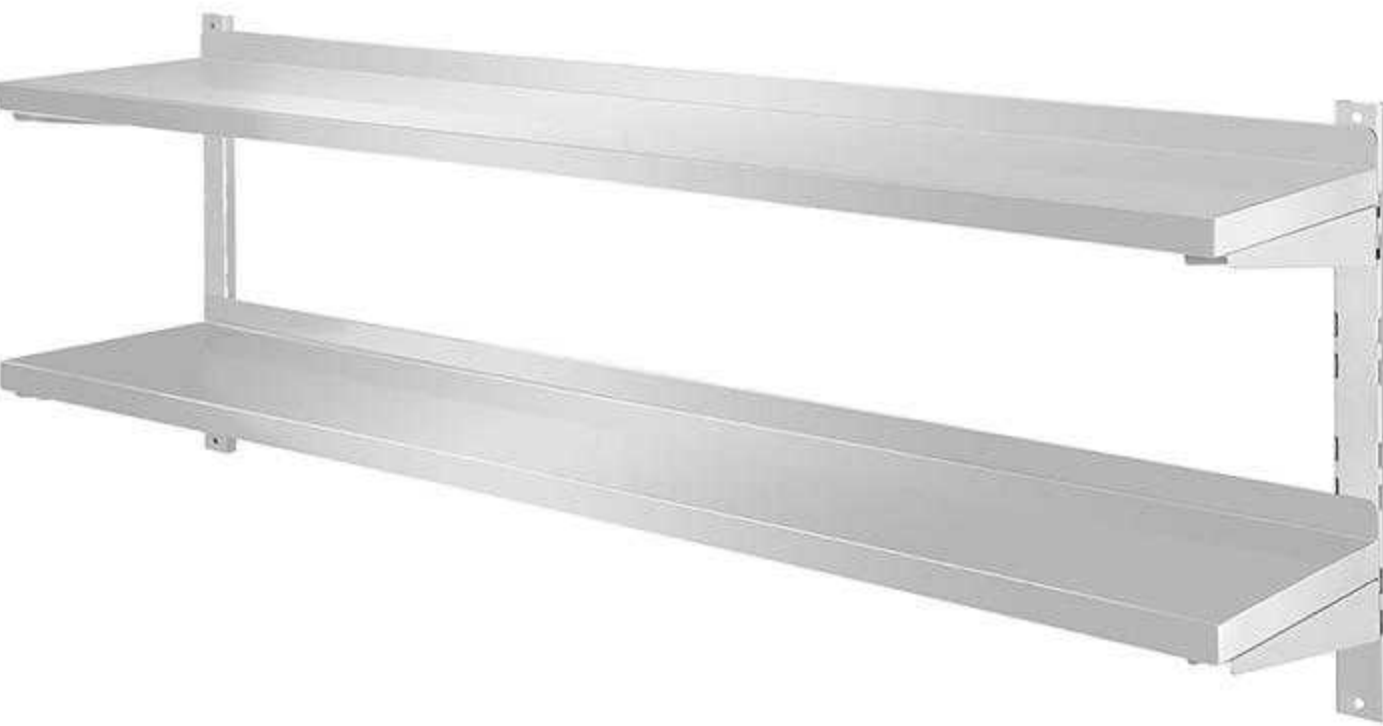

Two layers adjustable wall shelves		
300 mm WIDTH		
Model no	L x W x H mm	
GD2AWS63	600 x 300 x 700	
GD2AWS83	800 x 300 x 700	
GD2AWS103	1000 x 300 x 700	
GD2AWS123	1200 x 300 x 700	
GD2AWS143	1400 x 300 x 700	
GD2AWS163	1600 x 300 x 700	
GD2AWS183	1800 x 300 x 700	
GD2AWS203	2000 x 300 x 700	



Spice wall shelf with GN container stopper		
200 mm WIDTH		
Model no	L x W x H mm	
GDWSG82	800 x 200 - 4 x 1/6 GN	
GDWSG102	1000 x 200 - 5 x 1/6 GN	
GDWSG122	1200 x 200 - 6 x 1/6 GN	
GDWSG142	1400 x 200 - 7 x 1/6 GN	



Wall mounted shelf		
300 mm WIDTH		
Model no	L x W x H mm	
GDFWS63A	600 x 300	
GDFWS83A	800 x 300	
GDFWS103A	1000 x 300	
GDFWS123A	1200 x 300	
GDFWS143A	1400 x 300	



Spice wall shelf with GN container stopper		
200 mm WIDTH		
Model no	L x W x H mm	
GDWSG82A	800 x 200 - 4 x 1/6 GN	
GDWSG102A	1000 x 200 - 5 x 1/6 GN	
GDWSG122A	1200 x 200 - 6 x 1/6 GN	
GDWSG142A	1400 x 200 - 7 x 1/6 GN	



TABLEWARE CABINETS



One door stainless steel tableware cabinet

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDTC066	600 x 1800	GDTC067	600 x 1800
GDTC086	800 x 1800	GDTC087	800 x 1800



Hinged door stainless steel tableware cabinet

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDTCH106	1000 x 1800	GDTCH107	1000 x 1800
GDTCH126	1200 x 1800	GDTCH127	1200 x 1800
GDTCH146	1400 x 1800	GDTCH147	1400 x 1800
GDTCH166	1600 x 1800	GDTCH167	1600 x 1800



Sliding door stainless steel tableware cabinet

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDTCS106	1000 x 1800	GDTCS107	1000 x 1800
GDTCS126	1200 x 1800	GDTCS127	1200 x 1800
GDTCS146	1400 x 1800	GDTCS147	1400 x 1800
GDTCS166	1600 x 1800	GDTCS167	1600 x 1800

DRAWER SET



2 x GN 1/2 drawer set

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDSS2R56	500 x 850	GDSS2R57	500 x 850



2 x GN 1/2 drawer set with backsplash

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDSS2R56A	500 x 950	GDSS2R57A	500 x 950



3 x GN 1/3 drawer set

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDSS3R56	500 x 850	GDSS3R57	500 x 850



3 x GN 1/3 drawer set with backsplash

600 mm WIDTH		700 mm WIDTH	
Model no	L x H mm	Model no	L x H mm
GDSS3R56A	500 x 950	GDSS3R57A	500 x 950



STAINLESS STEEL SERVING TROLLEY



European style 2-layer dinning cart		
Model no	L x W x H mm	Layers
GD-M2	810 x 460 x 850	2
GD-L2	860 x 540 x 940	2



European style 3-layer dinning cart		
Model no	L x W x H mm	Layers
GD-M3	810 x 460 x 850	3
GD-L3	860 x 540 x 940	3



European style 4-layer dinning cart		
Model no	L x W x H mm	Layers
GD-L4	860 x 540 x 1250	4



European style 5-layer dinning cart		
Model no	L x W x H mm	Layers
GD-L5	860 x 540 x 1250	5



Stainless steel flat cart	
Model no	L x W x H mm
GD-FTA	900 x 550 x 870
GD-FTD	1000 x 600 x 870



Stainless steel folding cart	
Model no	L x W x H mm
GD-FTB	820 x 520 x 970



Platform cart	
Model no	L x W x H mm
GD-ST46	920 x 590 x 865
GD-ST47	700 x 450 x 830



Stainless steel flour cart	
Model no	L x W x H mm
GD-FCL	600 x 600 x 600
GD-FCM	500 x 500 x 600



STAINLESS STEEL SERVING TROLLEY



Stainless steel dish collecting cart round tube		
Model no	L x W x H mm	Remark
RTC-5A	900 x 460 x 950	Knock-down design
RTC-5B	850 x 450 x 900	Knock-down design



Stainless steel dish collecting cart square tube		
Model no	L x W x H mm	Remark
RTD-5A	850 x 450 x 900	Knock-down design
RTD-5B	770 x 435 x 900	Knock-down design



Garbage bin / small bin		
Model no	L x W x H mm	Color
ST-29C	330 x 240 x 260	Black / Grey
ST-29D	330 x 233 x 180	Black / Grey



Utility Cart		
Model no	L x W x H mm	Color
ST-48	1030 x 505 x 935	Black / Grey
ST-49	820 x 430 x 920	Black / Grey



Culttlery trolley with dishes		
Model no	L x W x H mm	Remark
CCT-L3	630 x 400 x 940	Knock-down design



Culttlery boxes		
Model no	L x W x H mm	Remark
B-39	500 x 360 x 90	White / Grey



Stainless steel quadrate laundry cart		
Model no	L x W x H mm	Remark
LC-Q	910 x 560 x 920	Knock-down design



Stainless steel cone-shaped laundry cart		
Model no	L x W x H mm	Remark
LC-C	900 x 650 x 850	Knock-down design

STAINLESS STEEL TRAY TROLLEY



Stainless steel single-line tray trolley with table

Model no	L x W x H mm	Remarks
TR-6AT	380 x 550 x 1000	For GN1/1 PAN 6 Pans
TR-6DT	595 x 665 x 1000	For GN2/1 PAN 6 Pans
TR-7AT	380 x 550 x 1000	For GN1/1 PAN 7 Pans
TR-7DT	595 x 665 x 1000	For GN2/1 PAN 7 Pans

Stainless steel single-line tray trolley

Model no	L x W x H mm	Remarks
TR-6A	380 x 550 x 1000	For GN1/1 PAN 6 Pans
TR-15A	380 x 550 x 1700	For GN1/1 PAN 15 Pans
TR-16A	380 x 550 x 1700	For GN1/1 PAN 16 Pans
TR-6D	590 x 670 x 1000	For GN2/1 PAN 6 Pans
TR-15D	590 x 670 x 1700	For GN2/1 PAN 15 Pans
TR-16D	590 x 670 x 1700	For GN2/1 PAN 16 Pans



Stainless steel double line tray trolley

Model no	L x W x H mm	Remarks
TR2-6A	740 x 550 x 1000	For GN1/1 PAN 12 Pans
TR2-15A	740 x 550 x 1700	For GN1/1 PAN 30 Pans
TR2-16A	740 x 550 x 1700	For GN1/1 PAN 32 Pans
TR2-18A	740 x 550 x 1700	For GN1/1 PAN 36 Pans



Stainless steel rack trolley

Model no	L x W x H mm	Remarks
TR-15AL	380 x 555 x 1480	15 LAYERS FOR 1/1GNPAN
TR-20AL	380 x 555 x 1860	20 LAYERS FOR 1/1GN PAN
TR-15DL	585 x 675 x 1480	15 LAYERS FOR 2/1GN PAN
TR-20DL	585 x 675 x 1860	20 LAYERS FOR 2/1GN PAN
LR-15L	460 x 630 x 1860	15 LAYERS FOR 60X40CM
LR-20L	460 x 630 x 1860	20 LAYERS FOR 60X40CM

Stainless steel rack trolley for GN 1/1 and 60 x 40 cm

Model no	L x W x H mm	Remarks
L/TR-15A	470 x 620 x 1700	GN1/1 PAN&60X40CM
L/TR-16A	470 x 620 x 1700	GN1/1 PAN&60X40CM
L/TR-18A	470 x 620 x 1700	GN1/1 PAN&60X40CM



Stainless steel rack trolley

Model no	L x W x H mm	Remarks
TR-18A	380 x 550 x 1700	For GN1/1 PAN 18 Pans
TR-20A	380 x 550 x 1000	For GN1/1 PAN 20 Pans
LR-18W	455 x 600 x 1700	18 LAYERFor 40X60 cm
LR-20W	455 x 600 x 1700	20 LAYERFor 40X60 cm



STAINLESS STEEL TRAY TROLLEY



Stainless steel single-line tray trolley		
Model no	L x W x H mm	Remarks
LR-6A	470 x 620 x 1000	6 PANS (L shape)
LR-10A	470 x 620 x 1300	10 PANS (L shape)
LR-15A	470 x 620 x 1700	15 PANS (L shape)
LR-16A	470 x 620 x 1700	16 PANS (L shape)



Stainless steel double-line tray trolley		
Model no	L x W x H mm	Remarks
LR2-6A	920 x 620 x 1000	12 PANS (L shape)
LR2-10A	920 x 620 x 1300	20 PANS (L shape)
LR2-15A	920 x 620 x 1700	30 PANS (L shape)
LR2-16A	920 x 620 x 1700	32 PANS (L shape)



Rack trolley for dishwasher basket		
Model no	L x W x H mm	Remarks
RWR-4	560 x 510 x 1000	Dishwasher basket
RWR-7	560 x 510 x 1700	Dishwasher basket




STAINLESS STEEL TRAY TROLLEY ACCESSORIES




Aluminium high whiter cake pan		
Model no	L x W x H mm	Remarks
GDAHW-4060H	600 x 400 x 50	0.4/0.6/0.7/0.8/1.0/1.2/1.4



Aluminium Low Wither Cake Pan		
Model no	L x W x H mm	Remarks
GDAHW-4060L	600 x 400 x 30	0.4/0.6/0.7/0.8/1.0/1.2/1.4

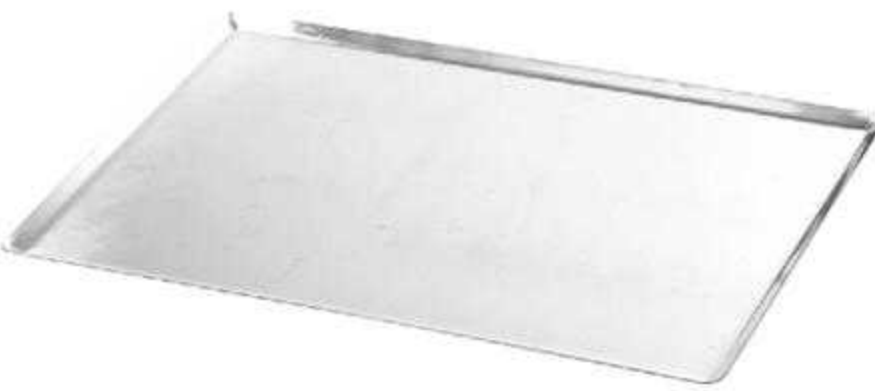

France baker pan		
Model no	L x W x H mm	Remarks
GDFT68S	600 x 400	1.2 stainless steel
GDT46AH	600 x 400	1.5 aluminium
GDT46A	600 x 400	1.2 aluminium

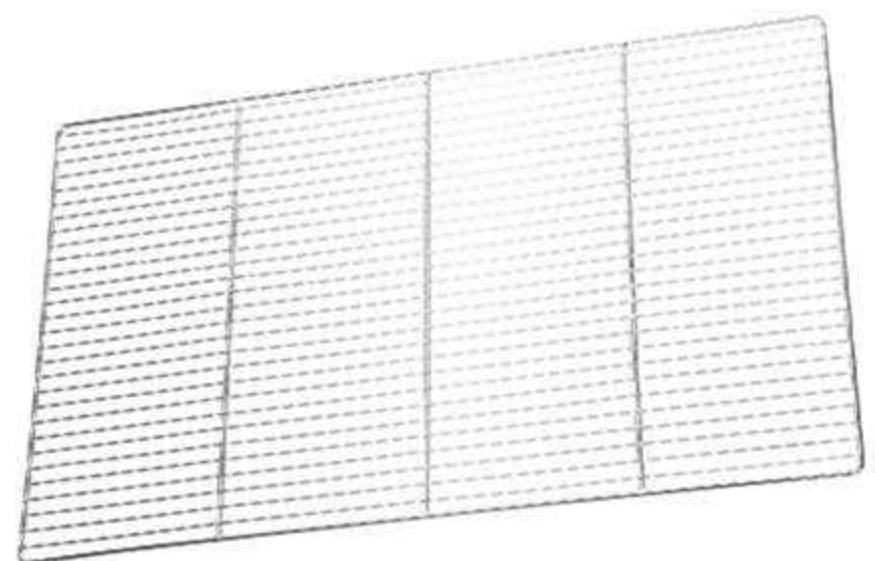

Baker Grill		
Model no	L x W mm	Remarks
GR-1/1	325 x 530	Φ5/Φ2
GR-46	400 x 600	Φ5/Φ2
GR-68	600 x 800	Φ5/Φ2



STAINLESS STEEL SINKS



Work table without backsplash

600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD66BM1	600 x 950	400 x 400 x 250	
GD76BM1	700 x 950	500 x 400 x 250	
GD86BM1	800 x 950	600 x 500 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD67BM1	600 x 950	400 x 400 x 250	400 x 400 x 250
GD77BM1	700 x 950	500 x 400 x 250	500 x 400 x 250
GD87BM1	800 x 950	600 x 500 x 250	600 x 500 x 300



Sink with 1 left basin + 1 right storage surface

600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD106BL1	1000 x 950	400 x 400 x 250	
GD126BL1	1200 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD107BL1	1000 x 950	500 x 400 x 250	500 x 400 x 250
GD127BL1	1200 x 950	500 x 500 x 250	500 x 500 x 300
GD147BL1	1400 x 950	600 x 500 x 250	600 x 500 x 300



Sink with 1 right basin + 1 left storage surface

600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD106BR1	1000 x 950	400 x 400 x 250	
GD126BR1	1200 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD107BR1	1000 x 950	500 x 400 x 250	500 x 400 x 250
GD127BR1	1200 x 950	500 x 500 x 250	500 x 500 x 300
GD147BR1	1400 x 950	600 x 500 x 250	600 x 500 x 300



Sink with 2 left basin + 1 right storage surface

600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD146BL2	1400 x 950	400 x 400 x 250	
GD166BL2	1600 x 950	500 x 400 x 250	
GD186BL2	1800 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD167BL2	1600 x 950	500 x 500 x 250	500 x 500 x 300
GD187BL2	1800 x 950	500 x 500 x 250	500 x 500 x 300



Sink with 2 right basin + 1 left storage surface

600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD146BR2	1400 x 950	400 x 400 x 250	
GD166BR2	1600 x 950	500 x 400 x 250	
GD186BR2	1800 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD167BR2	1600 x 950	500 x 500 x 250	500 x 500 x 300
GD187BR2	1800 x 950	500 x 500 x 250	500 x 500 x 300



2 sinks in center

600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD106BM2	1000 x 950	400 x 400 x 250	
GD126BM2	1200 x 950	500 x 400 x 250	
GD146BM2	1400 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD107BM2	1000 x 950	500 x 400 x 250	500 x 400 x 250
GD127BM2	1200 x 950	500 x 500 x 250	500 x 500 x 300
GD147BM2	1400 x 950	600 x 500 x 250	600 x 500 x 300



DISHWASHER SINK UNITS



Dishwasher sink unit with 1 left basin + 1 right storage surface			
600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD126BL1D	1200 x 950	400 x 400 x 250	
GD146BL1D	1400 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD127BL1D	1200 x 950	500 x 400 x 250	500 x 400 x 250
GD147BL1D	1400 x 950	600 x 500 x 250	600 x 500 x 300



Dishwasher sink unit with 1 right basin + 1 left storage surface			
600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD126BR1D	1200 x 950	400 x 400 x 250	
GD146BR1D	1400 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD127BR1D	1200 x 950	500 x 400 x 250	500 x 400 x 250
GD147BR1D	1400 x 950	600 x 500 x 250	600 x 500 x 300



Dishwasher sink unit with 2 left basins + 1 right storage surface			
600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD166BL2D	1600 x 950	400 x 400 x 250	
GD186BL2D	1800 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD167BL2D	1200 x 950	500 x 400 x 250	500 x 400 x 250
GD187BL2D	1400 x 950	500 x 500 x 250	500 x 500 x 300



Dishwasher sink unit with 2 right basins + 1 left storage surface			
600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD166BR2D	1600 x 950	400 x 400 x 250	
GD186BR2D	1800 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD167BR2D	1200 x 950	500 x 400 x 250	500 x 400 x 250
GD187BR2D	1400 x 950	500 x 500 x 250	500 x 500 x 300

SINK ACCESSORIES



Overflow drainer			
Model no	Dimensions (mm)	Material	Remarks
STD-01	φ67 x 250 (tube 230mm)	201	suitable for 250 mm basin
STD-02	φ67 x 280 (tube 260mm)	201	suitable for 300 mm basin
STD-03	φ67 x 250 (tube 230mm)	304	suitable for 250 mm basin
STD-04	φ67 x 280 (tube 260mm)	304	suitable for 300 mm basin



SINKS UNITS WITH CABINET



1 basin in center stainless steel sink with cabinet			
600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD86BMC1	800 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD87BMC1	800 x 950	600 x 500 x 250	600 x 500 x 300



2 basins in center stainless steel sink with cabinet			
600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD106BMC2	1000 x 950	400 x 400 x 250	
GD126BMC2	1200 x 950	500 x 400 x 250	
GD146BMC2	1400 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD107BMC2	1000 x 950	400 x 500 x 250	400 x 500 x 250
GD127BMC2	1200 x 950	500 x 500 x 250	500 x 500 x 300
GD147BMC2	1400 x 950	600 x 500 x 250	600 x 500 x 300



1 left basin sink with cabinet			
600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD106BLC1	1000 x 950	500 x 400 x 250	
GD126BLC1	1200 x 950	500 x 400 x 250	
GD146BLC1	1400 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD107BLC1	1000 x 950	500 x 500 x 250	500 x 500 x 250
GD127BLC1	1200 x 950	500 x 500 x 250	500 x 500 x 300
GD147BLC1	1400 x 950	600 x 500 x 250	600 x 500 x 300



2 left basins stainless steel sink with cabinet			
600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD146BLC2	1400 x 950	400 x 400 x 250	
GD166BLC2	1600 x 950	500 x 400 x 250	
GD186BLC2	1800 x 950	500 x 400 x 250	
GD206BLC2	2000 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD147BLC2	1400 x 950	400 x 500 x 250	400 x 500 x 250
GD167BLC2	1600 x 950	500 x 500 x 250	500 x 500 x 300
GD187BLC2	1800 x 950	500 x 500 x 250	500 x 500 x 300
GD207BLC2	2000 x 950	600 x 500 x 250	600 x 500 x 300




1 right basin sink with cabinet			
600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD106BRC1	1000 x 950	500 x 400 x 250	
GD126BRC1	1200 x 950	500 x 400 x 250	
GD146BRC1	1400 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD107BRC1	1000 x 950	500 x 500 x 250	500 x 500 x 250
GD127BRC1	1200 x 950	500 x 500 x 250	500 x 500 x 300
GD147BRC1	1400 x 950	600 x 500 x 250	600 x 500 x 300




2 right basins stainless steel sink with cabinet			
600 mm WIDTH			
Model no	L x H mm	Bowl dimension mm in aisi 201 / 304	
GD146BRC2	1400 x 950	400 x 400 x 250	
GD166BRC2	1600 x 950	500 x 400 x 250	
GD186BRC2	1800 x 950	500 x 400 x 250	
GD206BRC2	2000 x 950	500 x 400 x 250	
700 mm WIDTH			
Model no	L x H mm	Bowl dimension mm	
		In aisi 201	In aisi 304
GD147BRC2	1400 x 950	400 x 500 x 250	400 x 500 x 250
GD167BRC2	1600 x 950	500 x 500 x 250	500 x 500 x 300
GD187BRC2	1800 x 950	500 x 500 x 250	500 x 500 x 300
GD207BRC2	2000 x 950	600 x 500 x 250	600 x 500 x 300

EUROPEAN KITCHEN FAUCET


56061
Single Hole Mixer

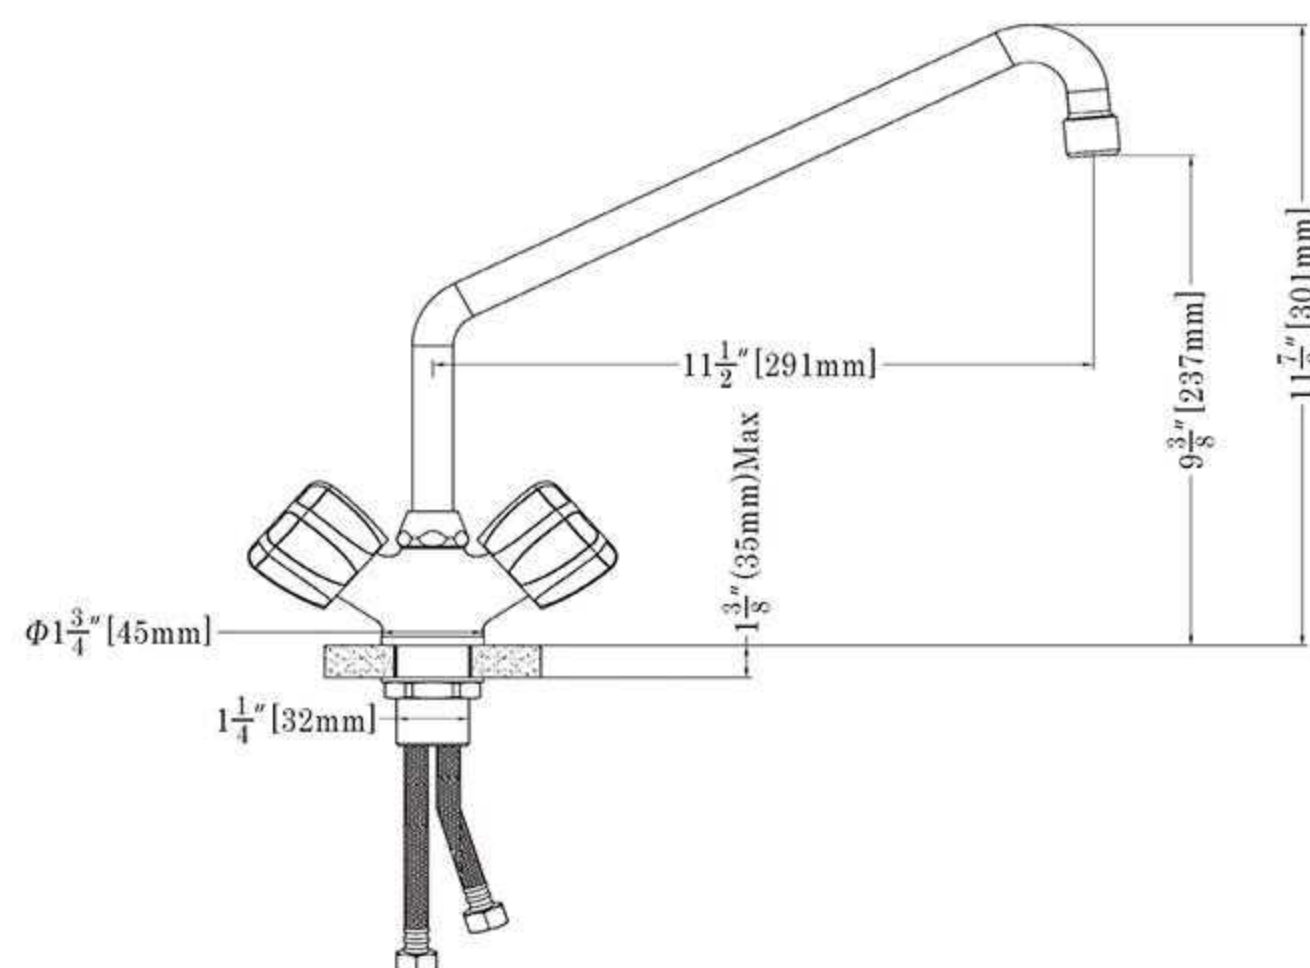


56067
Single Hole Mixer

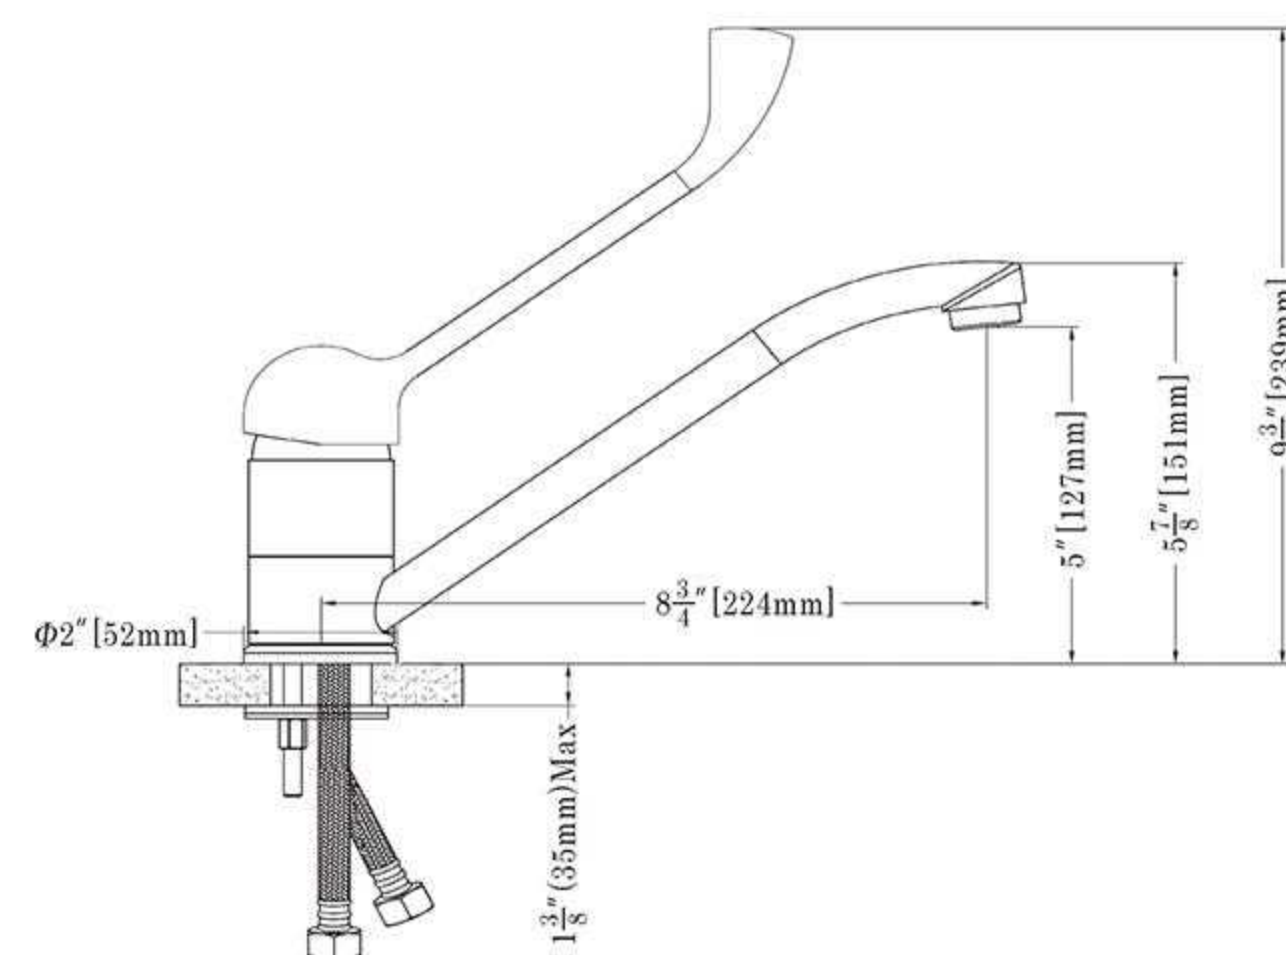


56A067
Single Hole Mixer

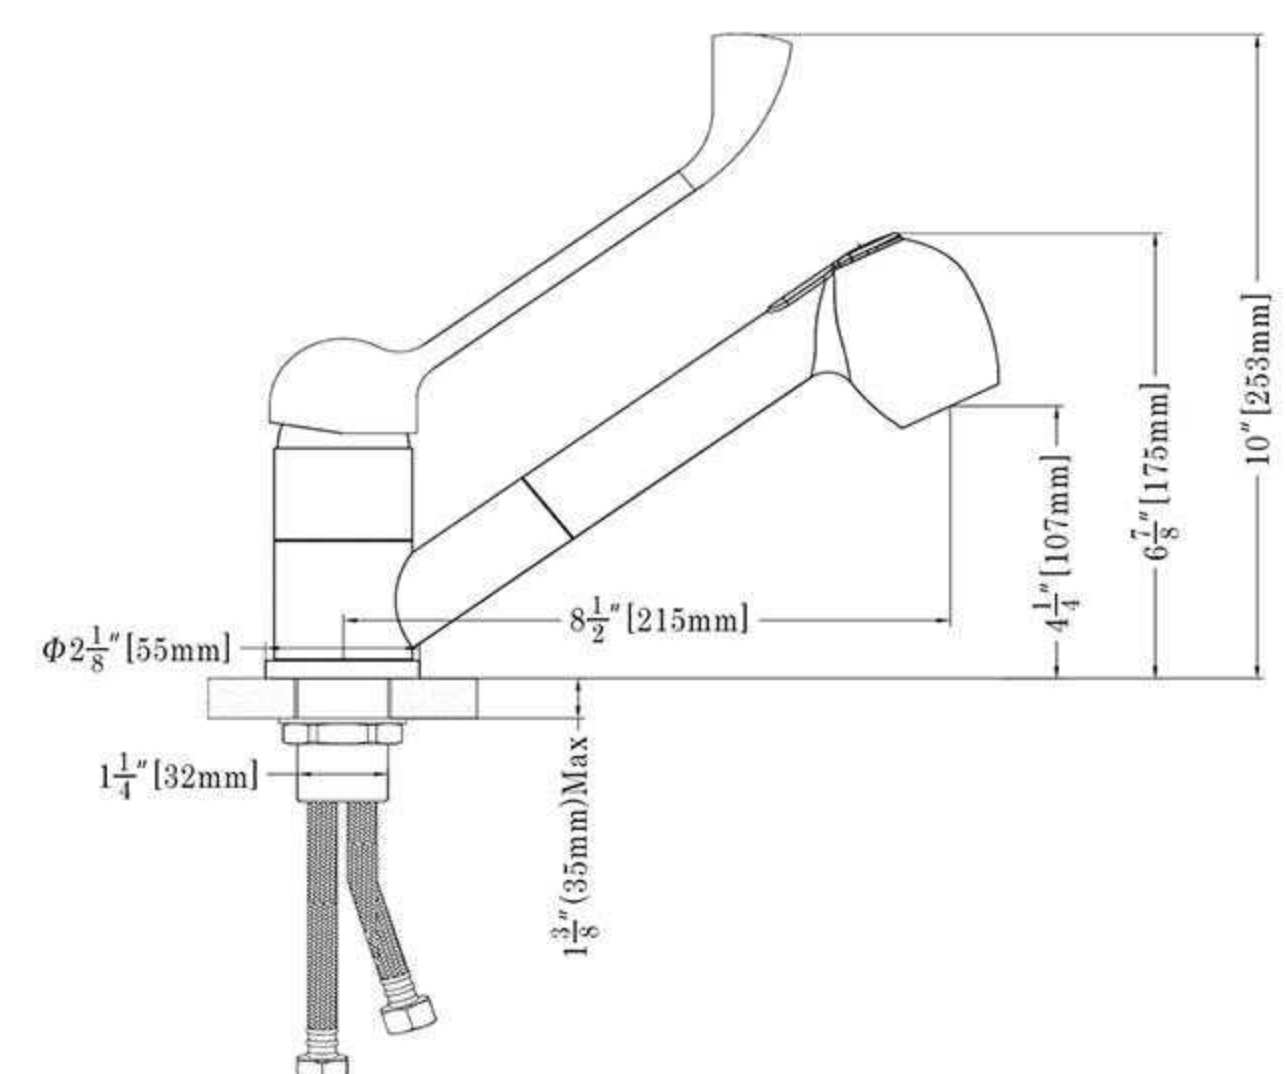


56001
Single Hole Mixer

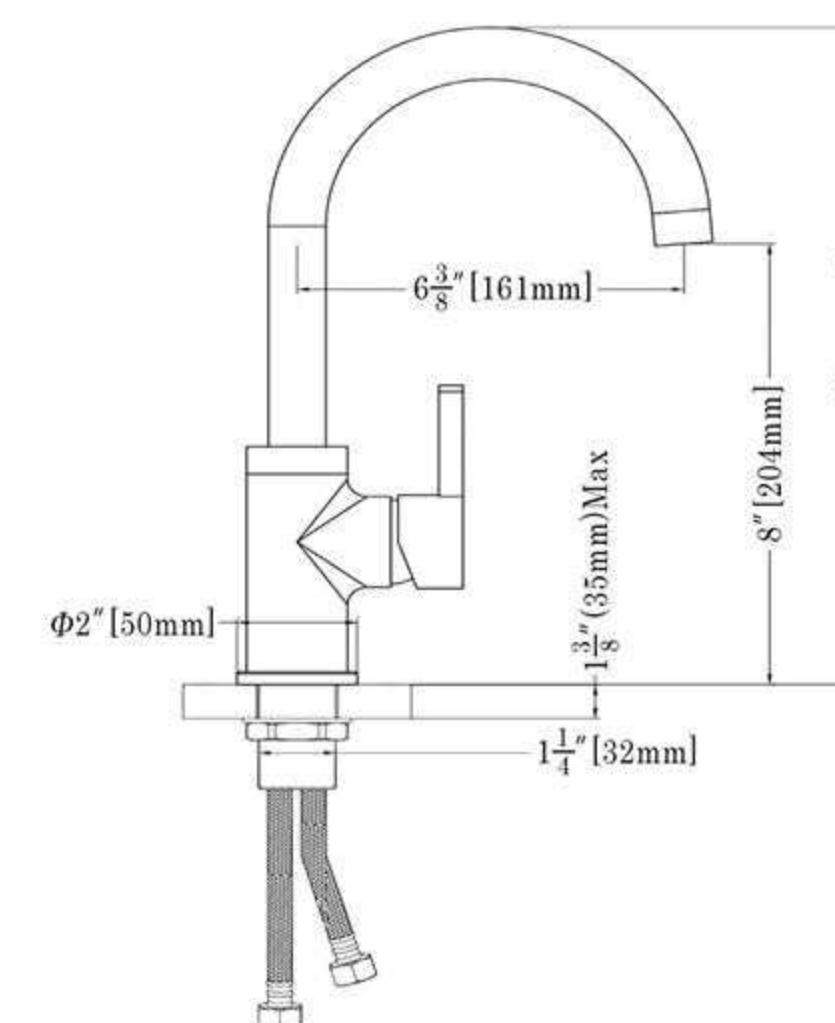

55071
Single Hole Mixer

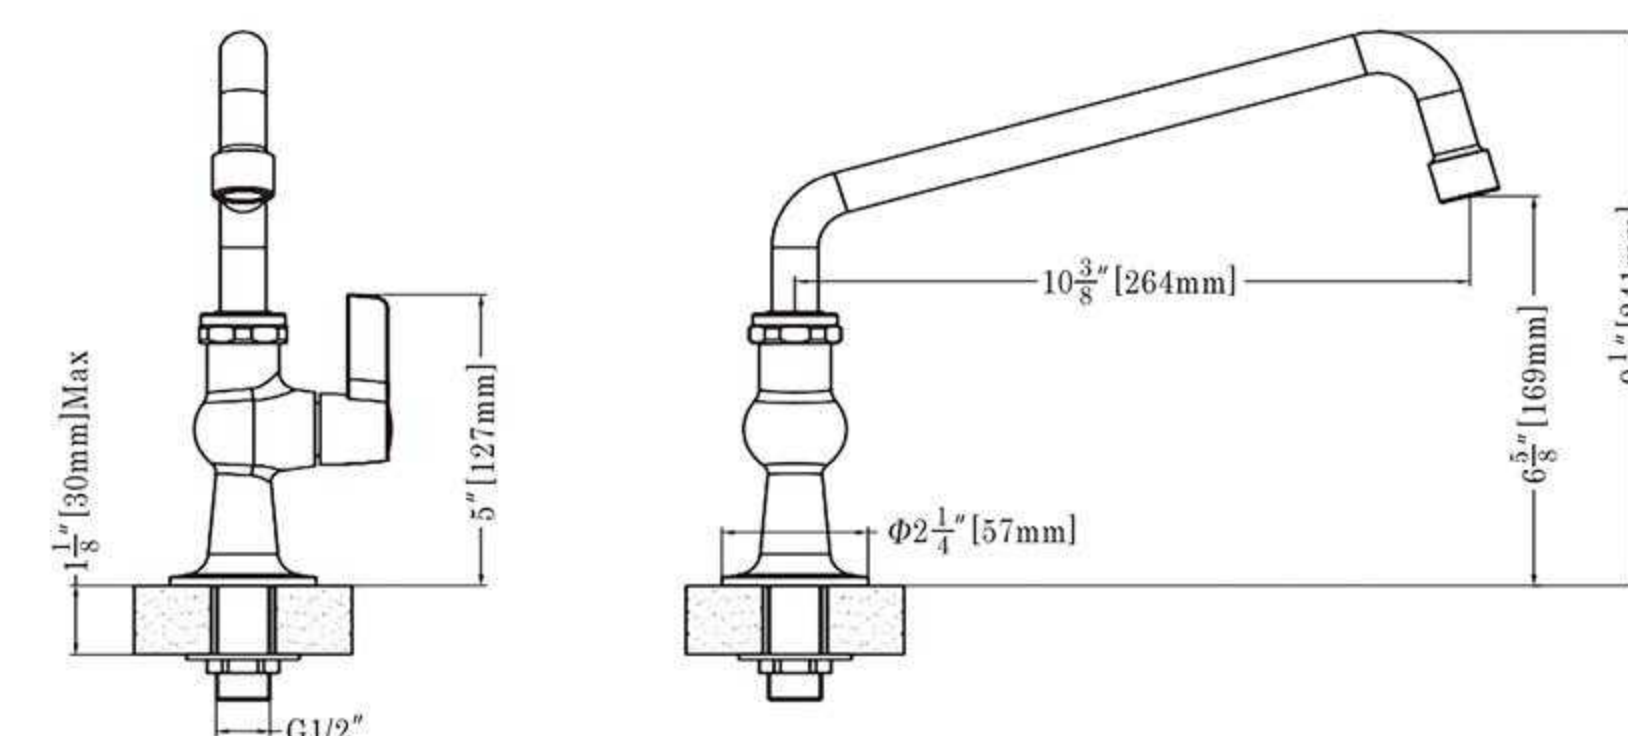


55093
Two Hole Mixer

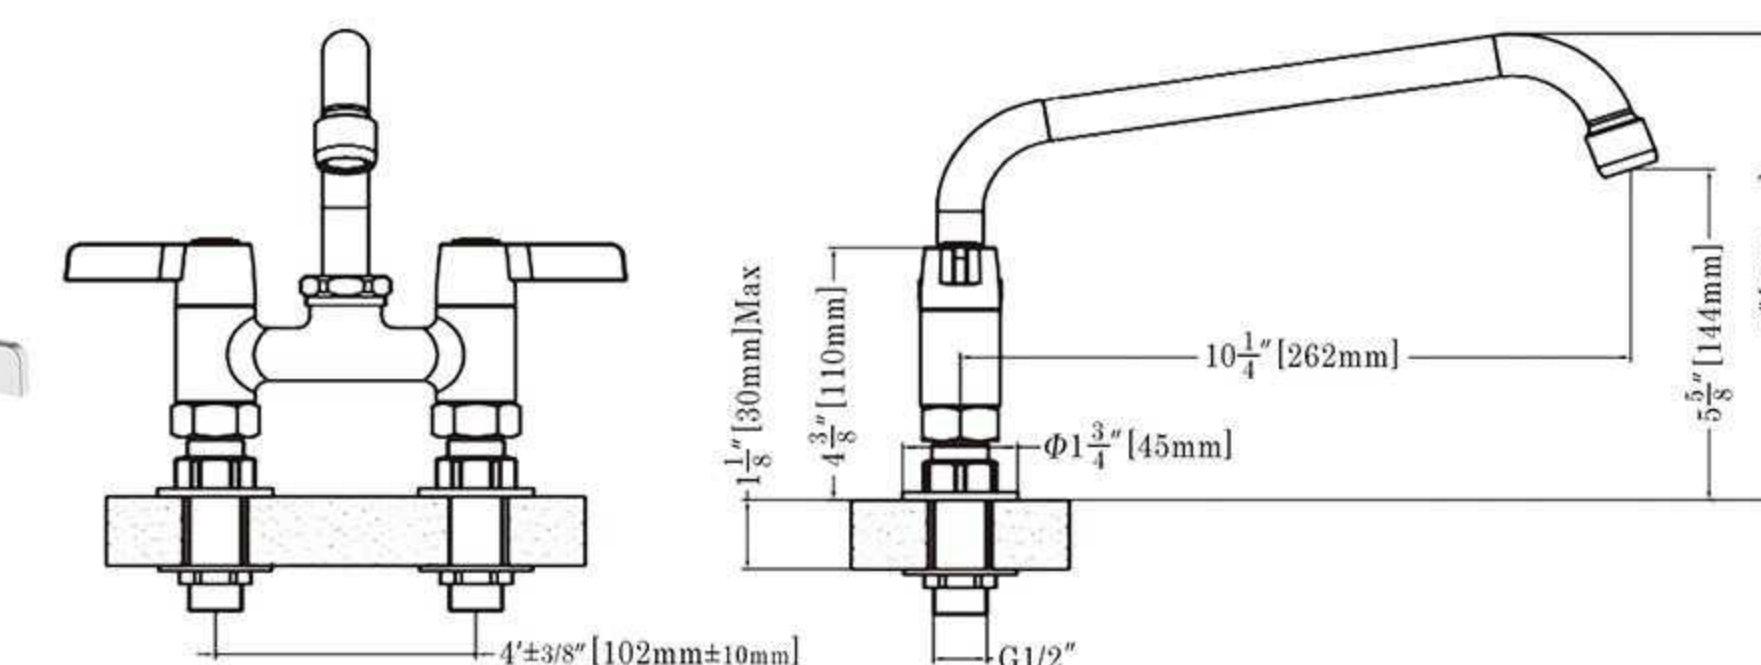




EUROPEAN KITCHEN FAUCET


56091
Single Hole Spray Assembly With Faucet

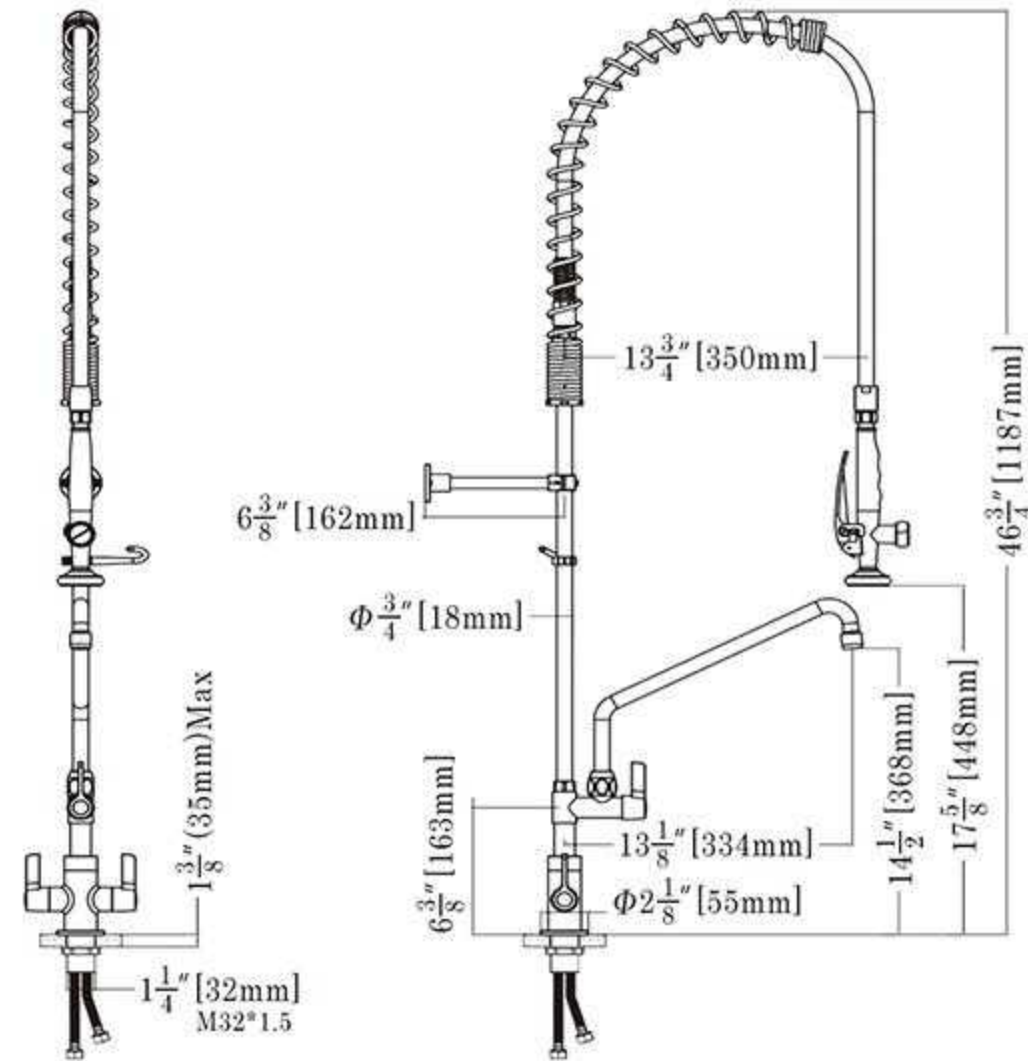


56A91
Single Hole Spray Assembly

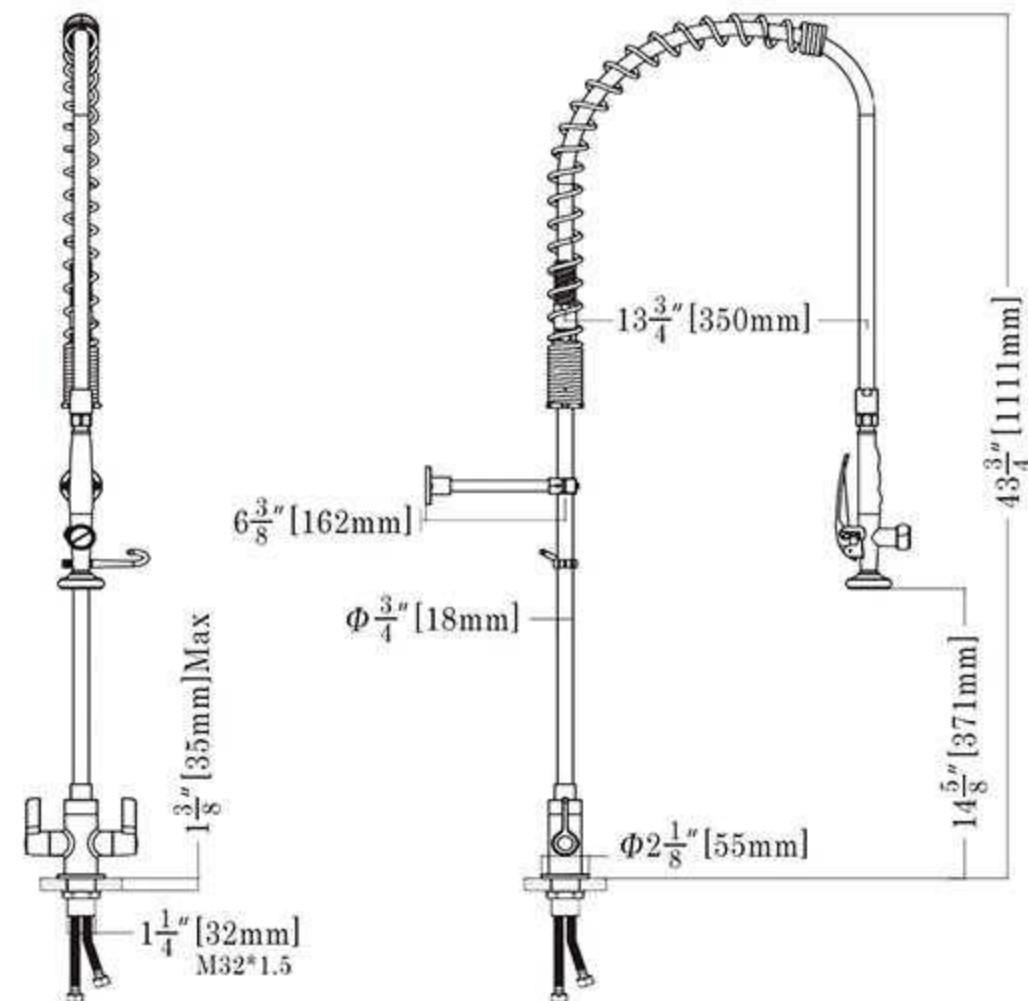


56093
Two Hole Spray Assembly With Faucet

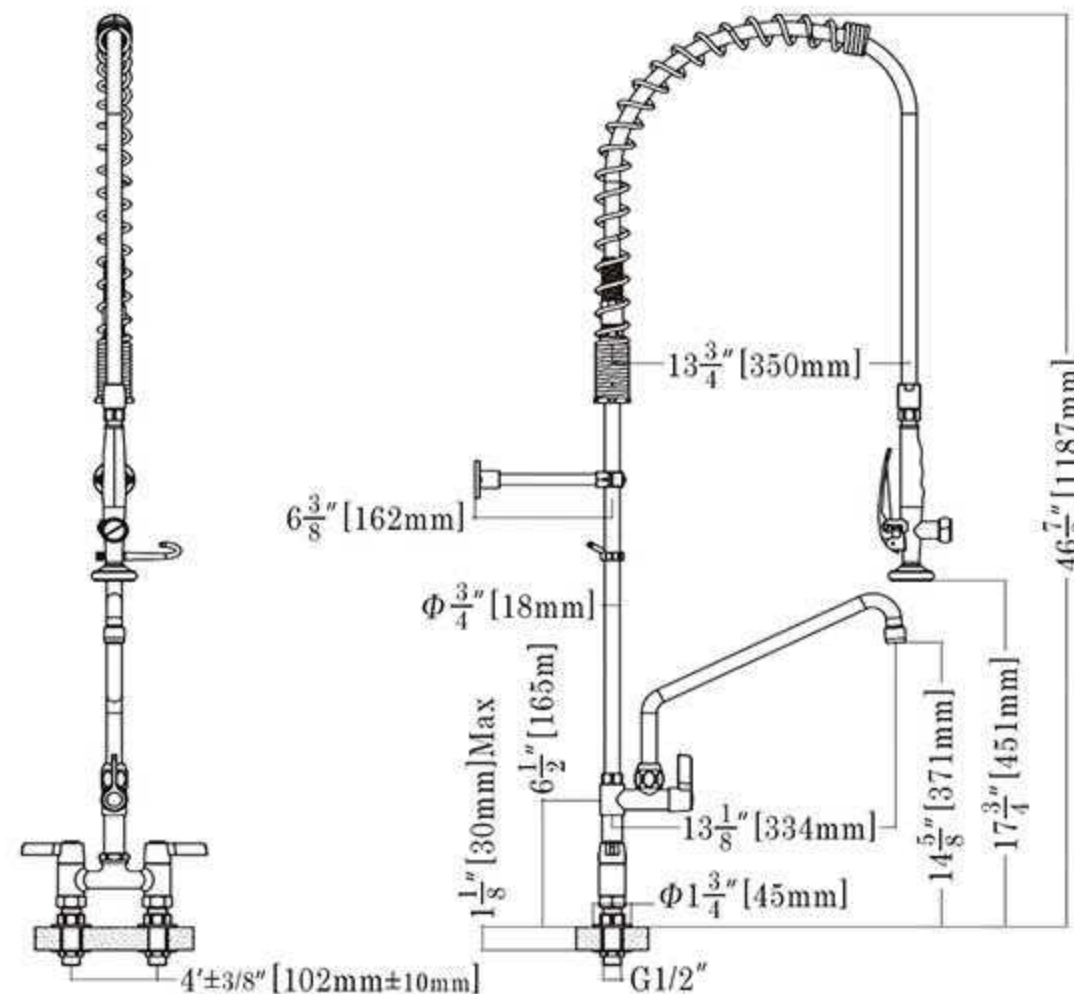


56A93
Two Hole Spray Assembly

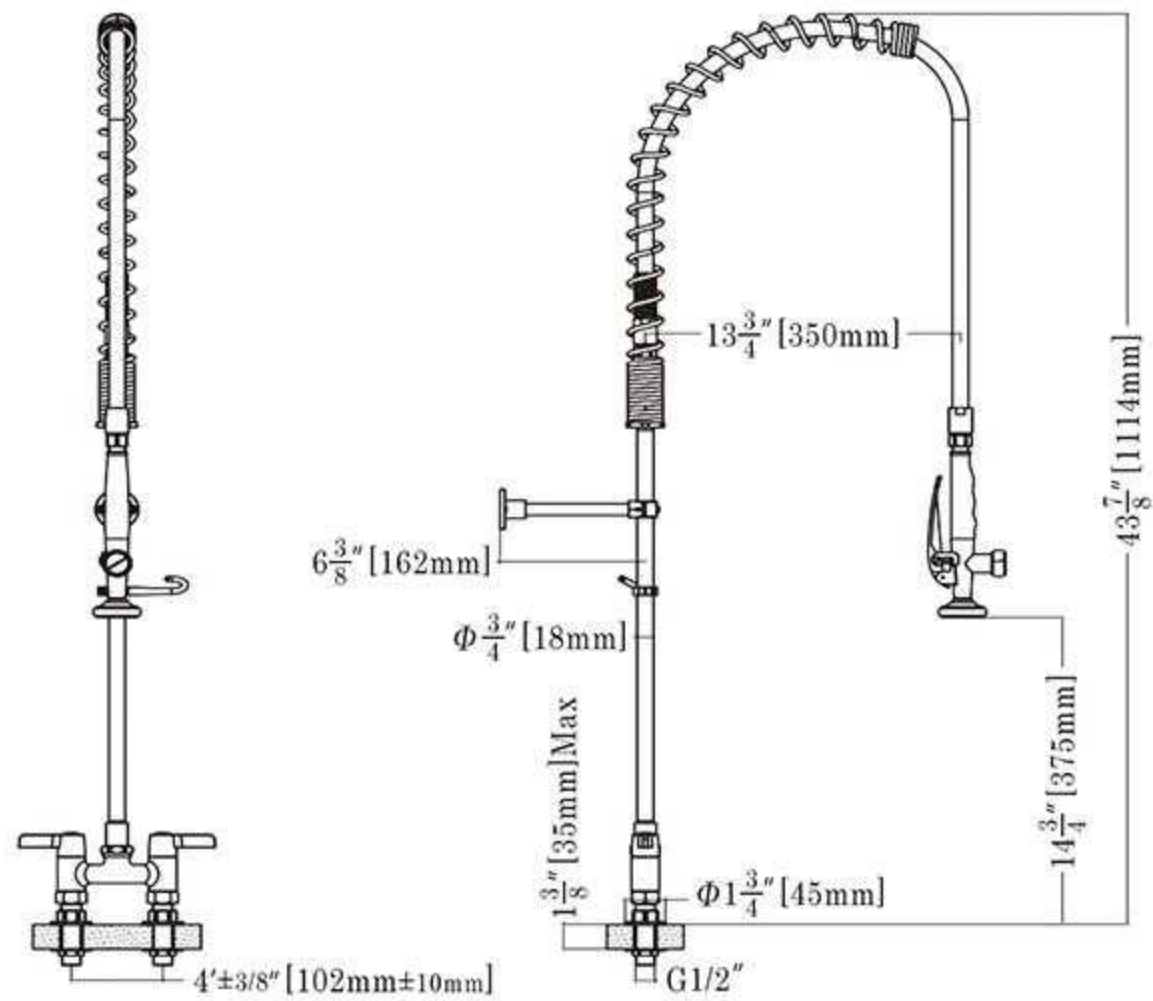

56071
Single Hole Spray Assembly With Faucet

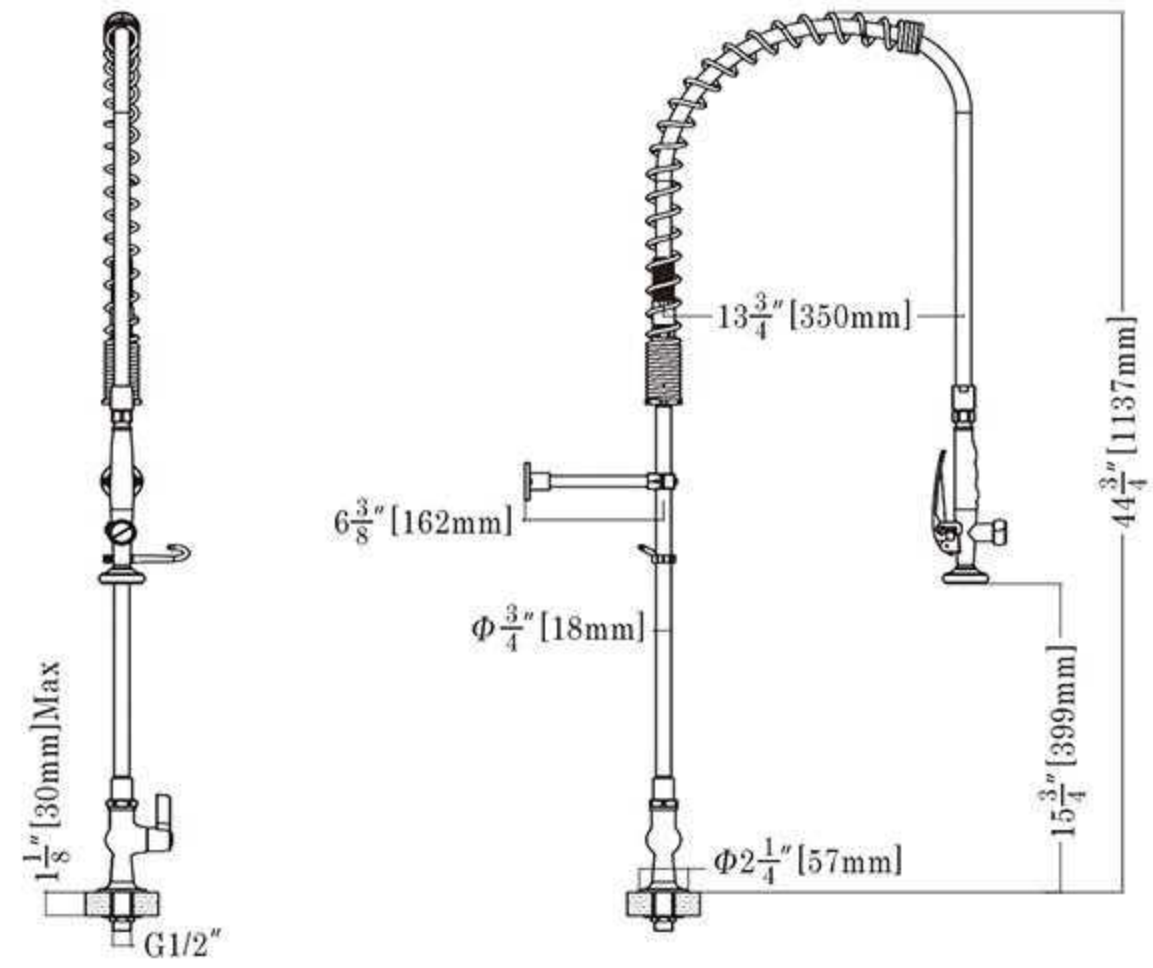

56A71
Single Hole Spray Assembly

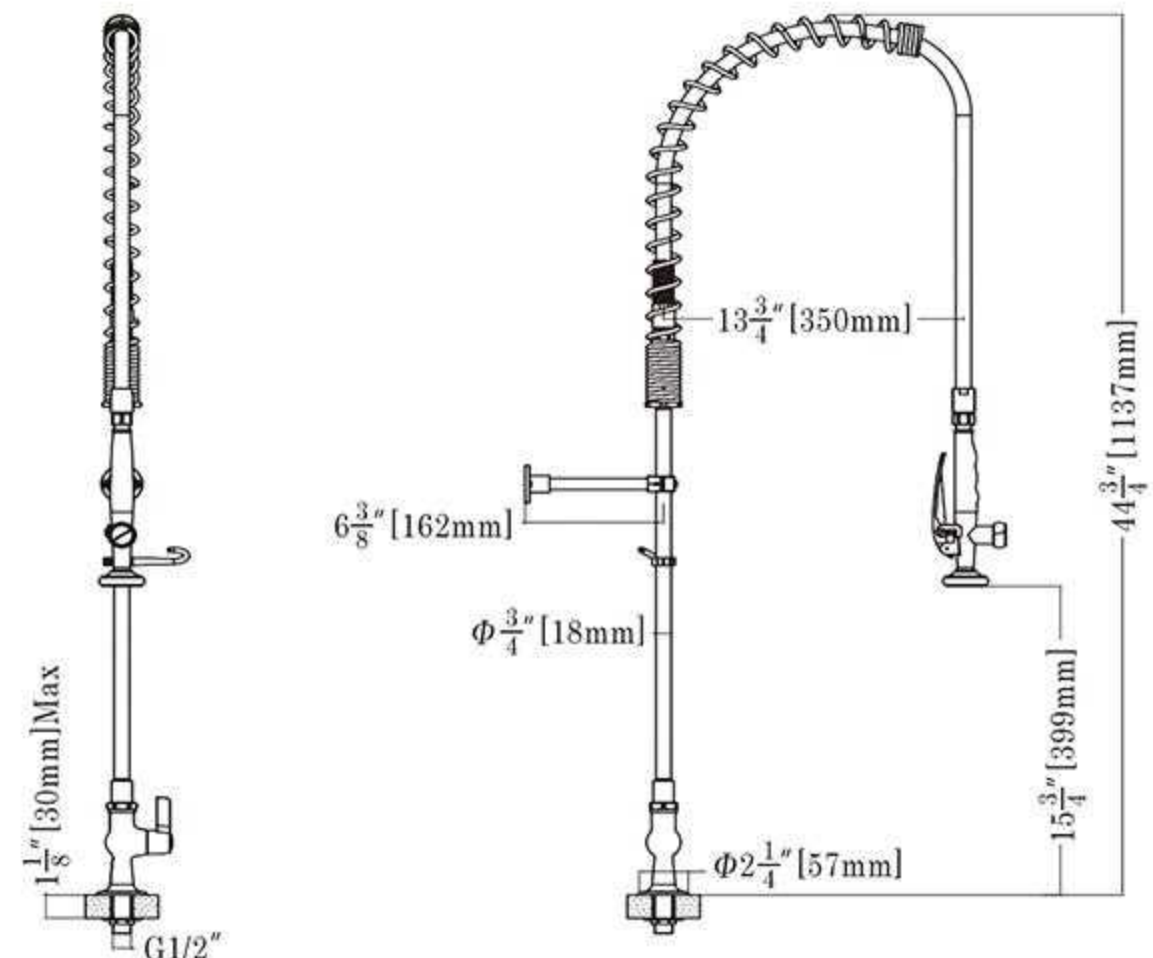

HAND WASHBASIN



Knee operated hand washbasin		
Model no	L x W x H mm	Remarks
GDLVB1	380 x 300 x 190	Knee action lever valve, inlet pipe



Knee operated hand washbasin		
Model no	L x W x H mm	Remarks
GDLVB2	400 x 335 x 550	Knee action lever valve, inlet pipe



Knee operated hand washbasin		
Model no	L x W x H mm	Remarks
GDLVB3	400 x 400 x 240	Knee action lever valve, inlet pipe



Knee operated hand washbasin		
Model no	L x W x H mm	Remarks
GDLVB8	480 x 350 x 260	Knee action lever valve, inlet pipe



Stainless steel janitorial sink		
Model no	L x W x H mm	Remarks
GDLVB4	690 x 500 x 850	/
GDLVB5	590 x 500 x 850	/

STAINLESS STEEL GARBAGE BIN



Stainless steel garbage bin		
Model no	L x W x H mm	Remarks
GB100-OF	370 x 560 x 890	100L
GB70-OF	500 x 515 x 774	70L

Stainless steel garbage bin		
Model no	L x W x H mm	Capacity
GB-50	Φ 350 x 600	50L
GB-100	Φ 450 x 700	100L



Stainless steel garbage bin		
Model no	L x W x H mm	Capacity
GB-50W	Φ 350 x 600	50L
GB-100W	Φ 450 x 700	100L



Stainless steel garbage bin		
Model no	L x W x H mm	Capacity
GB-50S	Φ 350 x 600	50L
GB-100S	Φ 450 x 700	100L



Stainless steel garbage bin		
Model no	L x W x H mm	Capacity
GBH-130	420 x 580 x 960	110~130L





GASTRONORM PAN




Standard Features:

- Europe Gastronorm Pan.
- According with EN-631 STANDARD.
- Stacking & Anti-jam function.
- Stakable.
- Prevent jamming during storage.
- Easy to take out.
- Additional handle.
- Convenience use.



Pan layouts

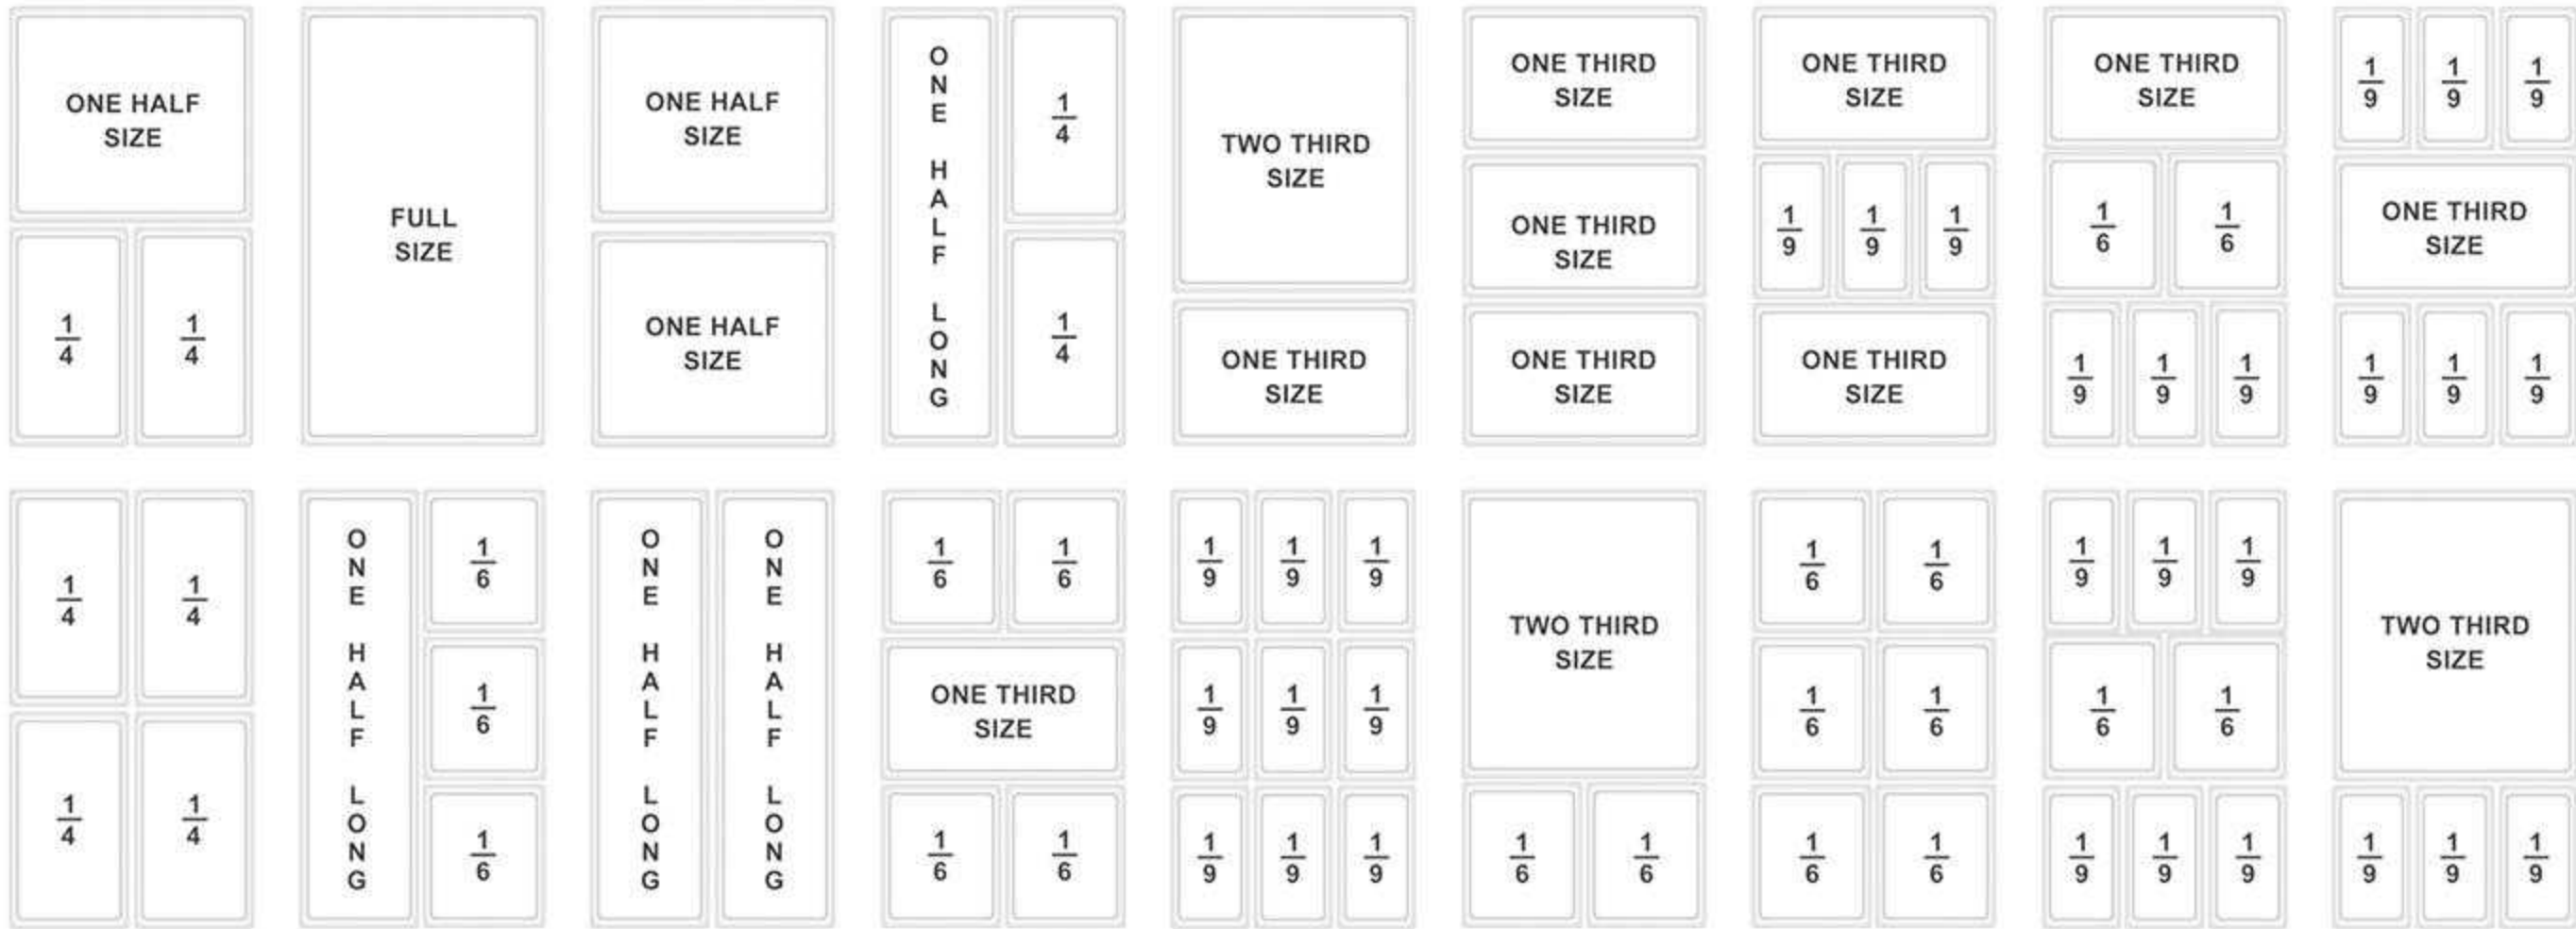

Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
821-20	GN2/1 x 20	0.8	650 x 530 x 20	6
821-40	GN2/1 x 40	0.8	650 x 530 x 40	6
821-55	GN2/1 x 55	0.8	650 x 530 x 55	6
821-2	GN2/1 x 65	0.8	650 x 530 x 65	6
821-4	GN2/1 x 100	0.8	650 x 530 x 100	6
821-6	GN2/1 x 150	0.8	650 x 530 x 150	6
821-8	GN2/1 x 200	0.8	650 x 530 x 200	6



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
811-20	GN1/1 x 20	0.6	530 x 325 x 20	6
811-40	GN1/1 x 40	0.6	530 x 325 x 40	6
811-55	GN1/1 x 55	0.6	530 x 325 x 55	6
811-2	GN1/1 x 65	0.6	530 x 325 x 65	6
811-4	GN1/1 x 100	0.6	530 x 325 x 100	6
811-6	GN1/1 x 150	0.7	530 x 325 x 150	6
811-8	GN1/1 x 200	0.7	530 x 325 x 200	6



GASTRONORM PAN



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
812-20	GN1/2 x 20	0.6	325 x 265 x 20	12
812-40	GN1/2 x 40	0.6	325 x 265 x 40	12
812-55	GN1/2 x 55	0.6	325 x 265 x 55	12
812-2	GN1/2 x 65	0.6	325 x 265 x 65	12
812-4	GN1/2 x 100	0.6	325 x 265 x 100	12
812-6	GN1/2 x 150	0.7	325 x 265 x 150	12
812-8	GN1/2 x 200	0.7	325 x 265 x 200	12



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
813-20	GN1/3 x 20	0.6	325 x 176 x 20	18
813-40	GN1/3 x 40	0.6	325 x 176 x 40	18
813-55	GN1/3 x 55	0.6	325 x 176 x 55	18
813-2	GN1/3 x 65	0.6	325 x 176 x 65	18
813-4	GN1/3 x 100	0.6	325 x 176 x 100	18
813-6	GN1/3 x 150	0.7	325 x 176 x 150	18
813-8	GN1/3 x 200	0.7	325 x 176 x 200	18



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
814-20	GN1/4 x 20	0.6	265 x 162 x 20	24
814-40	GN1/4 x 40	0.6	265 x 162 x 40	24
814-55	GN1/4 x 55	0.6	265 x 162 x 55	24
814-2	GN1/4 x 65	0.6	265 x 162 x 65	24
814-4	GN1/4 x 100	0.6	265 x 162 x 100	24
814-6	GN1/4 x 150	0.7	265 x 162 x 150	24
814-8	GN1/4 x 200	0.7	265 x 162 x 200	24



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
816-2	GN1/6 x 65	0.6	176 x 162 x 65	36
816-4	GN1/6 x 100	0.6	176 x 162 x 100	36
816-6	GN1/6 x 150	0.7	176 x 162 x 150	36
816-8	GN1/6 x 200	0.7	176 x 162 x 200	36



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
819-2	GN1/9 x 65	0.6	176 x 108 x 65	48
819-4	GN1/9 x 100	0.7	176 x 108 x 100	48
819-6	GN1/9 x 150	0.7	176 x 108 x 150	48



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
823-20	GN2/3 x 20	0.6	353 x 325 x 20	12
823-40	GN2/3 x 40	0.6	353 x 325 x 40	12
823-55	GN2/3 x 55	0.6	353 x 325 x 55	12
823-2	GN2/3 x 65	0.6	353 x 325 x 65	12
823-4	GN2/3 x 100	0.6	353 x 325 x 100	12
823-6	GN2/3 x 150	0.7	353 x 325 x 150	12
823-8	GN2/3 x 200	0.7	353 x 325 x 200	12



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
824-20	GN2/4 x 20	0.6	530 x 162 x 20	12
824-40	GN2/4 x 40	0.6	530 x 162 x 40	12
824-2	GN2/4 x 65	0.6	530 x 162 x 65	24
824-4	GN2/4 x 100	0.6	530 x 162 x 100	18
824-6	GN2/4 x 150	0.7	530 x 162 x 150	12



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
8112-2	GN1/12 x 65	0.6	132 x 108 x 65	36
8112-4	GN1/12 x 100	0.7	132 x 108 x 100	36



PERFORATED GASTRONORM PAN



Standard Features :

- Europe perforated Gastronorm pan
- Hole dia:5 mm



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
821-20P	GN2/1 x 20	0.8	650 x 530 x 20	6
821-40P	GN2/1 x 40	0.8	650 x 530 x 40	6
821-55P	GN2/1 x 55	0.8	650 x 530 x 55	6
821-2P	GN2/1 x 65	0.8	650 x 530 x 65	6
821-4P	GN2/1 x 100	0.8	650 x 530 x 100	6
821-6P	GN2/1 x 150	0.8	650 x 530 x 150	6
821-8P	GN2/1 x 200	0.8	650 x 530 x 200	6



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
811-20P	GN1/1 x 20	0.6	530 x 325 x 20	6
811-40P	GN1/1 x 40	0.6	530 x 325 x 40	6
811-55P	GN1/1 x 55	0.6	530 x 325 x 55	6
811-2P	GN1/1 x 65	0.6	530 x 325 x 65	6
811-4P	GN1/1 x 100	0.6	530 x 325 x 100	6
811-6P	GN1/1 x 150	0.7	530 x 325 x 150	6
811-8P	GN1/1 x 200	0.7	530 x 325 x 200	6



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
812-20P	GN1/2 x 20	0.6	325*265*20	12
812-40P	GN1/2 x 40	0.6	325*265*40	12
812-55P	GN1/2 x 55	0.6	325*265*55	12
812-2P	GN1/2 x 65	0.6	325*265*65	12
812-4P	GN1/2 x 100	0.6	325*265*100	12
812-6P	GN1/2 x 150	0.7	325*265*150	12
812-8P	GN1/2 x 200	0.7	325*265*200	12



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
823-20P	GN2/3*20	0.6	353*325*20	12
823-40P	GN2/3*40	0.6	353*325*40	12
823-55P	GN2/3*55	0.6	353*325*55	12
823-2P	GN2/3*65	0.6	353*325*65	12
823-4P	GN2/3*100	0.6	353*325*100	12
823-6P	GN2/3*150	0.7	353*325*150	12
823-8P	GN2/3*200	0.7	353*325*200	12



Standard Features :

- Europe perforated Gastronorm pan
- Hole dia:3.5 mm



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
821-20SP	GN2/1 x 20	0.8	650 x 530 x 20	6
821-40SP	GN2/1 x 40	0.8	650 x 530 x 40	6
821-55SP	GN2/1 x 55	0.8	650 x 530 x 55	6
821-2SP	GN2/1 x 65	0.8	650 x 530 x 65	6
821-4SP	GN2/1 x 100	0.8	650 x 530 x 100	6
821-6SP	GN2/1 x 150	0.8	650 x 530 x 150	6
821-8SP	GN2/1 x 200	0.8	650 x 530 x 200	6



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
811-20SP	GN1/1 x 20	0.6	530 x 325 x 20	6
811-40SP	GN1/1 x 40	0.6	530 x 325 x 40	6
811-55SP	GN1/1 x 55	0.6	530 x 325 x 55	6
811-2SP	GN1/1 x 65	0.6	530 x 325 x 65	6
811-4SP	GN1/1 x 100	0.6	530 x 325 x 100	6
811-6SP	GN1/1 x 150	0.7	530 x 325 x 150	6
811-8SP	GN1/1 x 200	0.7	530 x 325 x 200	6



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
812-20SP	GN1/2 x 20	0.6	325 x 265 x 20	12
812-40SP	GN1/2 x 40	0.6	325 x 265 x 40	12
812-55SP	GN1/2 x 55	0.6	325 x 265 x 55	12
812-2SP	GN1/2 x 65	0.6	325 x 265 x 65	12
812-4SP	GN1/2 x 100	0.6	325 x 265 x 100	12
812-6SP	GN1/2 x 150	0.7	325 x 265 x 150	12
812-8SP	GN1/2 x 200	0.7	325 x 265 x 200	12



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
813-20SP	GN1/3 x 20	0.6	325 x 176 x 20	18
813-40SP	GN1/3 x 40	0.6	325 x 176 x 40	18
813-55SP	GN1/3 x 55	0.6	325 x 176 x 55	18
813-2SP	GN1/3 x 65	0.6	325 x 176 x 65	18
813-4SP	GN1/3 x 100	0.6	325 x 176 x 100	18
813-6SP	GN1/3 x 150	0.7	325 x 176 x 150	18
813-8SP	GN1/3 x 200	0.7	325 x 176 x 200	18



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
823-20SP	GN2/3 x 20	0.6	353 x 325 x 20	12
823-40SP	GN2/3 x 40	0.6	353 x 325 x 40	12
823-55SP	GN2/3 x 55	0.6	353 x 325 x 55	12
823-2SP	GN2/3 x 65	0.6	353 x 325 x 65	12
823-4SP	GN2/3 x 100	0.6	353 x 325 x 100	12
823-6SP	GN2/3 x 150	0.7	353 x 325 x 150	12
823-8SP	GN2/3 x 200	0.7	353 x 325 x 200	12



PERFORATED GASTRONORM PAN



Europe gastronorm pan cover

Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
821-L	GN2/1 COVER	0.9	650 x 530	6
811-L	GN1/1 COVER	0.7	530 x 325	6
812-L	GN1/2 COVER	0.7	325 x 265	12
813-L	GN1/3 COVER	0.7	325 x 176	18
814-L	GN1/4 COVER	0.7	265 x 162	24
816-L	GN1/6 COVER	0.7	176 x 162	36
819-L	GN1/9 COVER	0.7	176 x 108	48
823-L	GN2/3 COVER	0.7	353 x 325	12
824-L	GN2/4 COVER	0.7	530 x 162	12
8112-L	GN1/12 COVER	0.7	132 x 108	36

Europe Gastronorm pan cover with notch

Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
821-L	GN2/1 COVER	0.9	650 x 530	6
811-L	GN1/1 COVER	0.7	530 x 325	6
812-L	GN1/2 COVER	0.7	325 x 265	12
813-L	GN1/3 COVER	0.7	325 x 176	18
814-L	GN1/4 COVER	0.7	265 x 162	24
816-L	GN1/6 COVER	0.7	176 x 162	36
819-L	GN1/9 COVER	0.7	176 x 108	48
823-L	GN2/3 COVER	0.7	353 x 325	12
824-L	GN2/4 COVER	0.7	530 x 162	12
8112-L	GN1/12 COVER	0.7	132 x 108	36

ADDITIONAL HANDLE



EUROPE GASTRONORM PAN COVER



Model no	Dimension (mm)	Packing Size (mm)	PCS / CTN	Remark
811-LS	530 x 325	550 x 345 x 155	6	With glue
812-LS	325 x 265	560 x 350 x 125	12	With glue
813-LS	325 x 176	560 x 350 x 130	18	With glue
814-LS	265 x 162	560 x 350 x 135	24	With glue
816-LS	176 x 162	560 x 350 x 135	36	With glue
819-LS	176 x 108	475 x 375 x 140	48	With glue

Model no	Dimension (mm)	Packing Size (mm)	PCS / CTN	Remark
811-LSL	530 x 325	550 x 345 x 155	6	Without glue
812-LSL	325 x 265	560 x 350 x 125	12	Without glue
813-LSL	325 x 176	560 x 350 x 130	18	Without glue
814-LSL	265 x 162	560 x 350 x 135	24	Without glue
816-LSL	176 x 162	560 x 350 x 135	36	Without glue

Model no	Dimension (mm)	Packing Size (mm)	PCS / CTN	Remark
811-LSA	512 x 305 x 26	550 x 345 x 200	6	With glue
812-LSA	307 x 246 x 26	560 x 350 x 200	12	With glue
813-LSA	306 x 157 x 26	540 x 340 x 180	18	With glue
816-LSA	157 x 144 x 22	530 x 340 x 160	24	With glue
823-LSA	337 x 308 x 26	680 x 380 x 200	36	With glue

Stainless steel dividing strip

Model no	Specification
FGT-11	525 x 25 x 10
FGT-12	325 x 25 x 10

Stainless steel drain shelf

Model no	Specification
GSB-11	460 x 270 x 15
GSD-12	270 x 210 x 15



US GASTRONORM PAN



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
811-20T	GN1/1 x 25	0.5	530 x 325 x 20	20
811-40T	GN1/1 x 40	0.5	530 x 325 x 40	20
811-2T	GN1/1 x 65	0.5	530 x 325 x 65	20
811-4T	GN1/1 x 100	0.5	530 x 325 x 100	20
811-6T	GN1/1 x 150	0.5	530 x 325 x 150	10
811-8T	GN1/1 x 200	0.5	530 x 325 x 200	10



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
812-20T	GN1/2 x 25	0.5	325 x 265 x 25	40
812-40T	GN1/2 x 40	0.5	325 x 265 x 40	40
812-2T	GN1/2 x 65	0.5	325 x 265 x 65	40
812-4T	GN1/2 x 100	0.5	325 x 265 x 100	40
812-6T	GN1/2 x 150	0.5	325 x 265 x 150	20
812-8T	GN1/2 x 200	0.5	325 x 265 x 200	20



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
813-20T	GN1/3 x 25	0.5	325 x 176 x 25	60
813-40T	GN1/3 x 40	0.5	325 x 176 x 40	60
813-2T	GN1/3 x 65	0.5	325 x 176 x 65	60
813-4T	GN1/3 x 100	0.5	325 x 176 x 100	60
813-6T	GN1/3 x 150	0.5	325 x 176 x 150	40
813-8T	GN1/3 x 200	0.5	325 x 176 x 200	40



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
814-20T	GN1/4 x 25	0.5	265 x 162 x 25	80
814-40T	GN1/4 x 40	0.5	265 x 162 x 40	80
814-2T	GN1/4 x 65	0.5	265 x 162 x 65	80
814-4T	GN1/4 x 100	0.5	265 x 162 x 100	60
814-6T	GN1/4 x 150	0.5	265 x 162 x 150	40
814-8T	GN1/4 x 200	0.6	265 x 162 x 200	40



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
816-2T	GN1/6 x 65	0.5	176 x 162 x 65	120
816-4T	GN1/6 x 100	0.5	176 x 162 x 100	80
816-6T	GN1/6 x 150	0.5	176 x 162 x 150	60
816-8T	GN1/6 x 200	0.7	176 x 162 x 200	40



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
819-2T	GN1/9 x 65	0.5	176 x 108 x 65	120
819-4T	GN1/9 x 100	0.5	176 x 108 x 100	120
819-6T	GN1/9 x 150	0.7	176 x 108 x 150	60



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
823-20T	GN2/3 x 20	0.5	353 x 325 x 20	40
823-40T	GN2/3 x 40	0.5	353 x 325 x 40	40
823-2T	GN2/3 x 65	0.5	353 x 325 x 65	30
823-4T	GN2/3 x 100	0.5	353 x 325 x 100	30
823-6T	GN2/3 x 150	0.5	353 x 325 x 150	25
823-8T	GN2/3 x 200	0.5	353 x 325 x 200	15

GRATES FOR STEAM PAN



MESH GRATES FOR STEAM PAN

Model no	Dimension (mm)	Packing Size (mm)	Pcs/Ctn
MG1/1	451 x 250	475 x 265 x 130	10
MG2/3	300 x 270	335 x 58 x 145	20
MG1/2	270 x 215	310 x 470 x 145	20
MG1/3	270 x 127	610 x 300* x 145	40
MG1/4	220 x 116	520 x 270 x 145	40
MG1/6	126 x 116	455 x 270 x 145	60



WIRE GRATES FOR STEAM PAN

Model no	Dimension (mm)	Packing Size (mm)	Pcs/Ctn
WG1/1	451 x 250	475 x 265 x 130	10
WG2/3	300 x 270	335 x 58 x 145	20
WG1/2	270 x 215	310 x 470 x 145	20
WG1/3	270 x 127	610 x 300 x 145	40
WG1/4	220 x 116	520 x 270 x 145	40
WG1/6	126 x 116	455 x 270 x 145	60



US ANTI-JAM GASTRONORM PAN



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
811-25CT	GN1/1 x 25	0.6	530 x 325 x 25	6
811-40CT	GN1/1 x 40	0.6	530 x 325 x 40	6
811-2CT	GN1/1 x 65	0.6	530 x 325 x 65	6
811-4CT	GN1/1 x 100	0.6	530 x 325 x 100	6
811-6CT	GN1/1 x 150	0.6	530 x 325 x 150	6
811-8CT	GN1/1 x 200	0.6	530 x 325 x 200	6



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
812-25CT	GN1/2 x 25	0.6	325 x 265 x 25	12
812-40CT	GN1/2 x 40	0.6	325 x 265 x 40	12
812-2CT	GN1/2 x 65	0.6	325 x 265 x 65	12
812-4CT	GN1/2 x 100	0.6	325 x 265 x 100	12
812-6CT	GN1/2 x 150	0.6	325 x 265 x 150	12
812-8CT	GN1/2 x 200	0.6	325 x 265 x 200	12



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
813-2CT	GN1/3 x 65	0.6	325 x 176 x 65	18
813-4CT	GN1/3 x 100	0.6	325 x 176 x 100	18
813-6CT	GN1/3 x 150	0.6	325 x 176 x 150	18
813-8CT	GN1/3 x 200	0.6	325 x 176 x 200	18



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
814-2CT	GN1/4 x 65	0.6	265 x 162 x 65	24
814-4CT	GN1/4 x 100	0.6	265 x 162 x 100	24
814-6CT	GN1/4 x 150	0.6	265 x 162 x 150	24
814-8CT	GN1/4 x 200	0.6	265 x 162 x 200	24



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
816-2CT	GN1/6 x 65	0.6	176 x 162 x 65	36
816-4CT	GN1/6 x 100	0.6	176 x 162 x 100	36
816-6CT	GN1/6 x 150	0.6	176 x 162 x 150	36
816-8CT	GN1/6 x 200	0.6	176 x 162 x 200	36



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
819-2CT	GN1/9 x 65	0.6	176 x 108 x 65	48
819-4CT	GN1/9 x 100	0.6	176 x 108 x 100	48
819-6CT	GN1/9 x 150	0.6	176 x 108 x 150	48



Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
823-20CT	GN2/3 x 20	0.6	353 x 325 x 20	12
823-40CT	GN2/3 x 40	0.6	353 x 325 x 40	12
823-2CT	GN2/3 x 65	0.6	353 x 325 x 65	12
823-4CT	GN2/3 x 100	0.6	353 x 325 x 100	12
823-6CT	GN2/3 x 150	0.6	353 x 325 x 150	12
823-8CT	GN2/3 x 200	0.6	353 x 325 x 200	12

US GASTRONORM PAN COVER



US Anti-Jam gastronorm pan cover

Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
811-LCT	GN1/1 COVER	0.6	530 x 325	6
812-LCT	GN1/2 COVER	0.6	325 x 265	12
813-LCT	GN1/3 COVER	0.6	325x176	18
814-LCT	GN1/4 COVER	0.6	265 x 162	24
816-LCT	GN1/6 COVER	0.6	176 x 162	36
819-LCT	GN1/9 COVER	0.6	176 x 108	48
823-LCT	GN2/3 COVER	0.6	353 x 325	12



US Anti-Jam Gastronorm pan cover with notch

Model no	Size mm	Thickness mm	L x Wx H mm	Pcs/Ctn
811-LCTN	GN1/1 NOTCH COVER	0.6	530 x 325	6
812-LCTN	GN1/2 NOTCH COVER	0.6	325 x 265	12
813-LCTN	GN1/3 NOTCH COVER	0.6	325 x 176	18
814-LCTN	GN1/4 NOTCH COVER	0.6	265 x 162	24
816-LCTN	GN1/6 NOTCH COVER	0.6	176 x 162	36
819-LCTN	GN1/9 NOTCH COVER	0.6	176 x 108	48
823-LCTN	GN2/3 NOTCH COVER	0.6	353 x 325	12

STAINLESS STEEL SAUCE DISPENSER



2L Sauce Dispenser

Model no	Dimension (mm)	Remark
NHD-227	130 x 265 x 315	single
NHD-228	130 x 265 x 315	single
NHD-229	245 x 265 x 315	double
NHD-230	357 x 265 x 315	triple

3L Sauce Dispenser

Model no	Dimension (mm)	Remark
NHD-327	130 x 275 x 380	single
NHD-328	130 x 275 x 380	single
NHD-329	245 x 275 x 380	double
NHD-330	357 x 275 x 380	triple

SAUCE BUCKET



Model no	Dimension (mm)	Thickness (mm)	Remark
T12-75	240 x 240 x 75	1	304
T12-160	240 x 240 x 160	1	304
T12-235	240 x 240 x 235	1	304
T12L	240 x 240	1	304



Model no	Dimension (mm)	Thickness (mm)	Remark
T16-75	155 x 155 x 75	1	304
T16-160	155 x 155 x 160	1	304
T16-235	155 x 155 x 235	1	304
T16L	155 x 155	1	304



Model no	Dimension (mm)	Thickness (mm)	Remark
T19-55	155 x 105 x 55	1	304
T19-75	155 x 105 x 75	1	304
T19-160	155 x 105 x 160	1	304
T19L	155 x 105	1	304

STAINLESS STEEL KNIFE+FORK BOX



Model no	Size mm	Pane	Remark
KTB-2A	265 x 150 x 190	2	single line
KTB-3A	38 x 150 x 190	3	single line
KTB-4A	505 x 150 x 190	4	single line
KTB-5A	625 x 150 x 190	5	single line

Model no	Size mm	Pane	Remark
KTB-4B	265 x 300 x 210	4	double line
KTB-6B	385 x 300 x 210	6	double line
KTB-8B	505 x 300 x 210	8	double line

STAINLESS STEEL GN PAN RACK



Model no	Size mm	Pane	Remark
GNR-2A	510 x 225 x 210	3	single line
GNR-3A	670 x 225 x 210	4	single line
GNR-4A	830 x 225 x 210	5	single line
GNR-5A	990 x 225 x 210	6	single line

Model no	Size mm	Pane	Remark
GNR-4B	340 x 400 x 245	4	double line
GNR-6B	505 x 400 x 245	6	double line
GNR-8B	670 x 400 x 245	8	double line

STAINLESS STEEL TURKEY POT

Model no	Pot Dimension (mm)	Basket Dimension (mm)	Remark
24QT	φ320 x 288 x 0.5	φ300 x 190 x 0.5	SS201 flat lid
36QT	φ350 x 360 x 0.6	φ320 x 260 x 0.5	SS201 flat lid
44QT	φ350 x 440 x 0.6	φ320 x 330 x 0.5	SS201 Sphere lid
62QT	φ400 x 475 x 0.7	φ360 x 366 x 0.6	SS201 Sphere lid
82QT	φ480 x 434 x 0.7	φ450 x 395 x 0.6	SS201 Sphere lid
102QT	φ480 x 540 x 1.0	φ450 x 508 x 0.6	SS201 Sphere lid
122QT	φ550 x 491 x 1.0	φ500 x 460 x 0.8	SS201 Sphere lid
142QT	φ550 x 571 x 1.0	φ500 x 533 x 0.9	SS201 Sphere lid
162QT	φ600 x 548 x 2.0	φ560 x 560 x 0.9	SS201 Sphere lid

Model no	Pot Dimension (mm)	Basket Dimension (mm)	Remark
10.5QT	φ305 x 132 x 0.5	φ270 x 116 x 0.5	SS201 flat lid
11QT	φ320 x 165 x 0.6	φ280 x 143 x 0.6	SS201 flat lid





ACCESSORIES



S.S Tapered oil funnel

Model no	Size mm
GD-F001	255 x 130 x 220
GD-F002	Φ140 x 167



S.S tapered sirup funnel

Model no	Size mm
GD-F003	280 x 200 x 240



S.S Milk Cup

Model no	Capacity L
GDNB-350	0.35
GDNB-550	0.55
GDNB-750	0.75



S.S Milk Cup

Model no	Capacity L
GDNB-300	0.35
GDNB-600	0.6
GDNB-1000	1
GDNB-1500	1.5
GDNB-2000	2



Coffee Waste Pan

Model no	Size mm
GDC-10	176 x 162 x 100
GDC-15	176 x 162 x 150



S.S Boston Cup

Model no	Size mm
BSDB-070	0.7



Stainless steel strainer

Model no	Dimension (mm)	Remark
CKCL-32	320 x 200 x 180	SS201/1.0mm
CKCL-36	360 x 230 x 200	SS201/1.0mm
CKCL-40	400 x 260 x 220	SS201/1.0mm
CKCL-45	450 x 290 x 240	SS201/1.0mm
CKCL-50	500 x 330 x 260	SS201/1.0mm
CKCL-55	550 x 350 x 300	SS201/1.0mm
CKCL-60	600 x 400 x 320	SS201/1.0mm



Stainless steel bucket

Model no	Dimension (mm)	Remark
TT-25-1	250 x 220 x 285	SS201/0.5mm w/o lid
TT-30-1	300 x 250 x 315	SS201/0.5mm w/o lid
TT-35-1	350 x 300 x 365	SS201/0.5mm w/o lid
TT-25-1L	250 x 220 x 285	SS201/0.5mm with lid
TT-30-1L	300 x 250 x 315	SS201/0.5mm with lid
TT-35-1L	350 x 300 x 365	SS201/0.5mm with lid



Stainless steel roto champ

Model no	Dimension (mm)	Remark
MCQ-300	φ300 x 130	5 SS blades

HEAVY DUTY WIRE SHELVING



Epoxy Coating

Standard Features:

- High quality stainless steel, corrosion resistant and easy cleaning.
- Tank fully peened for easy cleaning and great cooking performance.
- Key componets have CSA / ETL certificate.
- 6" adjustable stainless steel legs can be removed when packing to reduce the transportation cost.
- Solid state control ,200 °F to 400 °F.
- Natural gas /LP conversion kit included.
- Castors optional.
- Mounting type: freestanding.
- Usage scenrio: Kitchen, Outdoor.
- 3/4" NPT rear gas connection and regulator standard.
- Heavy duty cast-iron burners.



Chrome Plating

HEAVY DUTY WIRE SHELVING

MATERIAL AND SURFACE TREATMENT



Stainless Steel 304

Containing 8% Nickel, which is the highest grade in Stainless Steel 304, with electropolishing. Addresses the most aggressive applications and environments. applications. Exists for high temperature automated cart wash and autoclave.

Colored Epoxy Coating

Epoxy finish is phosphatized before epoxy coating for dry, low humidity environments, with a variety of colors, such as green, silver and black etc. Extra antimicrobial additive could be built to the finish to keep the product clean. Extra Zinc undercoating could be made before epoxy coating to achieve a corrosion resistant finish for wet or high humidity environments with a 10-year warranty against rust and corrosion.

Zinc Undercoated with Clear Epoxy Coating

Economical, Zinc plating finish, with a protective clear epoxy coating, for high humidity or low temperature environments with a 10-year warranty against rust and corrosion.

Chrome Plating

The Copper-Nickel-Chrome finishes for dry, low humidity environments.





HEAVY DUTY WIRE SHELVING

4 SHELF WIRE SHELVING KITS

Standard Features:

- Includes 4 wire shelves & 4 x 74" (1890mm)posts.



Chrome plating



Zinc w / epoxy



Zinc w / Clear epoxy



SS304

Deep	Shelf (inch)	Shelf (mm)	Chrome	Zinc w/ epoxy	Zinc w/ clear epoxy	SS304
	w x l	w x l	model no	model no	model no	model no
14"(355mm) deep	14" x 24"	355 x 610	GDWS1424C	GDWS1424ZE	GDWS1424ZCE	GDWS1424SS
	14" x 30"	355 x 760	GDWS1430C	GDWS1430ZE	GDWS1430ZCE	GDWS1430SS
	14" x 36"	355 x 910	GDWS1436C	GDWS1436ZE	GDWS1436ZCE	GDWS1436SS
	14" x 42"	355 x 1070	GDWS1442C	GDWS1442ZE	GDWS1442ZCE	GDWS1442SS
	14" x 48"	355 x 1220	GDWS1448C	GDWS1448ZE	GDWS1448ZCE	GDWS1448SS
	14" x 54"	355 x 1370	GDWS1454C	GDWS1454ZE	GDWS1454ZCE	GDWS1454SS
	14" x 60"	355 x 1520	GDWS1460C	GDWS1460ZE	GDWS1460ZCE	GDWS1460SS
	14" x 72"	355 x 1830	GDWS1472C	GDWS1472ZE	GDWS1472ZCE	GDWS1472SS
18"(455mm) deep	18" x 24"	455 x 610	GDWS1824C	GDWS1824ZE	GDWS1824ZCE	GDWS1824SS
	18" x 30"	455 x 760	GDWS1830C	GDWS1830ZE	GDWS1830ZCE	GDWS1830SS
	18" x 36"	455 x 910	GDWS1836C	GDWS1836ZE	GDWS1836ZCE	GDWS1836SS
	18" x 42"	455 x 1070	GDWS1842C	GDWS1842ZE	GDWS1842ZCE	GDWS1842SS
	18" x 48"	455 x 1220	GDWS1848C	GDWS1848ZE	GDWS1848ZCE	GDWS1848SS
	18" x 54"	455 x 1370	GDWS1854C	GDWS1854ZE	GDWS1854ZCE	GDWS1854SS
	18" x 60"	455 x 1520	GDWS1860C	GDWS1860ZE	GDWS1860ZCE	GDWS1860SS
	18" x 72"	455 x 1830	GDWS1872C	GDWS1872ZE	GDWS1872ZCE	GDWS1872SS
21"(535mm) deep	21" x 24"	535 x 610	GDWS2124C	GDWS2124ZE	GDWS2124ZCE	GDWS2124SS
	21" x 30"	535 x 760	GDWS2130C	GDWS2130ZE	GDWS2130ZCE	GDWS2130SS
	21" x 36"	535 x 910	GDWS2136C	GDWS2136ZE	GDWS2136ZCE	GDWS2136SS
	21" x 42"	535 x 1070	GDWS2142C	GDWS2142ZE	GDWS2142ZCE	GDWS2142SS
	21" x 48"	535 x 1220	GDWS2148C	GDWS2148ZE	GDWS2148ZCE	GDWS2148SS
	21" x 54"	535 x 1370	GDWS2154C	GDWS2154ZE	GDWS2154ZCE	GDWS2154SS
	21" x 60"	535 x 1520	GDWS2160C	GDWS2160ZE	GDWS2160ZCE	GDWS2160SS
	21" x 72"	535 x 1830	GDWS2172C	GDWS2172ZE	GDWS2172ZCE	GDWS2172SS
24"(610mm) deep	24" x 24"	610 x 610	GDWS2424C	GDWS2424ZE	GDWS2424ZCE	GDWS2424SS
	24" x 30"	610 x 760	GDWS2430C	GDWS2430ZE	GDWS2430ZCE	GDWS2430SS
	24" x 36"	610 x 910	GDWS2436C	GDWS2436ZE	GDWS2436ZCE	GDWS2436SS
	24" x 42"	610 x 1070	GDWS2442C	GDWS2442ZE	GDWS2442ZCE	GDWS2442SS
	24" x 48"	610 x 1220	GDWS2448C	GDWS2448ZE	GDWS2448ZCE	GDWS2448SS
	24" x 54"	610 x 1370	GDWS2454C	GDWS2454ZE	GDWS2454ZCE	GDWS2454SS
	24" x 60"	610 x 1520	GDWS2460C	GDWS2460ZE	GDWS2460ZCE	GDWS2460SS
	24" x 72"	610 x 1830	GDWS2472C	GDWS2472ZE	GDWS2472ZCE	GDWS2472SS

HEAVY DUTY WIRE SHELVING

4 SHELF WIRE SHELVING ADD-ON UNIT

Standard Features:

- Includes 4 wire shelves , 2 x 74" (1890mm)posts & Fixings.



Metallic Grey



Black

Deep	Shelf (inch)	Shelf (mm)	Chrome	Zinc w/ epoxy	Zinc w/ clear epoxy	SS304
	w x l	w x l	model no	model no	model no	model no
14"(355mm) deep	14" x 24"	355 x 610	GDWSA1424C	GDWSA1424ZE	GDWSA1424ZCE	GDWSA1424SS
	14" x 30"	355 x 760	GDWSA1430C	GDWSA1430ZE	GDWSA1430ZCE	GDWSA1430SS
	14" x 36"	355 x 910	GDWSA1436C	GDWSA1436ZE	GDWSA1436ZCE	GDWSA1436SS
	14" x 42"	355 x 1070	GDWSA1442C	GDWSA1442ZE	GDWSA1442ZCE	GDWSA1442SS
	14" x 48"	355 x 1220	GDWSA1448C	GDWSA1448ZE	GDWSA1448ZCE	GDWSA1448SS
	14" x 54"	355 x 1370	GDWSA1454C	GDWSA1454ZE	GDWSA1454ZCE	GDWSA1454SS
	14" x 60"	355 x 1520	GDWSA1460C	GDWSA1460ZE	GDWSA1460ZCE	GDWSA1460SS
	14" x 72"	355 x 1830	GDWSA1472C	GDWSA1472ZE	GDWSA1472ZCE	GDWSA1472SS
18"(455mm) deep	18" x 24"	455 x 610	GDWSA1824C	GDWSA1824ZE	GDWSA1824ZCE	GDWSA1824SS
	18" x 30"	455 x 760	GDWSA1830C	GDWSA1830ZE	GDWSA1830ZCE	GDWSA1830SS
	18" x 36"	455 x 910	GDWSA1836C	GDWSA1836ZE	GDWSA1836ZCE	GDWSA1836SS
	18" x 42"	455 x 1070	GDWSA1842C	GDWSA1842ZE	GDWSA1842ZCE	GDWSA1842SS
	18" x 48"	455 x 1220	GDWSA1848C	GDWSA1848ZE	GDWSA1848ZCE	GDWSA1848SS
	18" x 54"	455 x 1370	GDWSA1854C	GDWSA1854ZE	GDWSA1854ZCE	GDWSA1854SS
	18" x 60"	455 x 1520	GDWSA1860C	GDWSA1860ZE	GDWSA1860ZCE	GDWSA1860SS
	18" x 72"	455 x 1830	GDWSA1872C	GDWSA1872ZE	GDWSA1872ZCE	GDWSA1872SS
21"(535mm) deep	21" x 24"	535 x 610	GDWSA2124C	GDWSA2124ZE	GDWSA2124ZCE	GDWSA2124SS
	21" x 30"	535 x 760	GDWSA2130C	GDWSA2130ZE	GDWSA2130ZCE	GDWSA2130SS
	21" x 36"	535 x 910	GDWSA2136C	GDWSA2136ZE	GDWSA2136ZCE	GDWSA2136SS
	21" x 42"	535 x 1070	GDWSA2142C	GDWSA2142ZE	GDWSA2142ZCE	GDWSA2142SS
	21" x 48"	535 x 1220	GDWSA2148C	GDWSA2148ZE	GDWSA2148ZCE	GDWSA2148SS
	21" x 54"	535 x 1370	GDWSA2154C	GDWSA2154ZE	GDWSA2154ZCE	GDWSA2154SS
	21" x 60"	535 x 1520	GDWSA2160C	GDWSA2160ZE	GDWSA2160ZCE	GDWSA2160SS
	21" x 72"	535 x 1830	GDWSA2172C	GDWSA2172ZE	GDWSA2172ZCE	GDWSA2172SS
24"(610mm) deep	24" x 24"	610 x 610	GDWSA2424C	GDWSA2424ZE	GDWSA2424ZCE	GDWSA2424SS
	24" x 30"	610 x 760	GDWSA2430C	GDWSA2430ZE	GDWSA2430ZCE	GDWSA2430SS
	24" x 36"	610 x 910	GDWSA2436C	GDWSA2436ZE	GDWSA2436ZCE	GDWSA2436SS
	24" x 42"	610 x 1070	GDWSA2442C	GDWSA2442ZE	GDWSA2442ZCE	GDWSA2442SS
	24" x 48"	610 x 1220	GDWSA2448C	GDWSA2448ZE	GDWSA2448ZCE	GDWSA2448SS
	24" x 54"	610 x 1370	GDWSA2454C	GDWSA2454ZE	GDWSA2454ZCE	GDWSA2454SS
	24" x 60"	610 x 1520	GDWSA2460C	GDWSA2460ZE	GDWSA2460ZCE	GDWSA2460SS
	24" x 72"	610 x 1830	GDWSA2472C	GDWSA2472ZE	GDWSA2472ZCE	GDWSA2472SS



UTILITY CART WITH WIRE SHELVES



Standard Features:

- 3 pcs of Heavy Duty Wire Shelves.
- 2 pcs of one-piece U Handles.
- 1 set of 5" Rubber Casters (2 with brake, 2 without brake).
- 4 pcs of Rubber Donut Bumpers.
- Center shelf can be positioned at any height in 1 in. (2.5cm) increments.
- The weight capacity of the trolley is determined by the casters.
- Total unit capacity ranges from 600-800 lbs(272-363 kg).



one-piece U handle



side view



casters

Utility Trolley		Chrome Finish	Epoxy Finish	SS 304
w x l x h (inch)	w x l x h (mm)	model no	model no	model no
18" x 30" x 33"	460 x 760 x 840	GD1830C	GD1830E	GD1830SS
18" x 36" x 33"	460 x 901 x 840	GD1836C	GD1836E	GD1836SS
18" x 48" x 33"	460 x 1220 x 840	GD1848C	GD1848E	GD1848SS

WALL BRACKETS

NON-ADJUSTABLE WALL BRACKETS




Single Components [qty]

- 2 PCS Single Non-adjustable Wall Brackets, separately packed in 2 poly bags.
- 4 PCS Chrome Collar Plugs.

Double Components [qty]

- 1 PCS Double Non-adjustable Wall Bracket, packed in 1 poly bag.
- 4 PCS Chrome Collar Plugs.

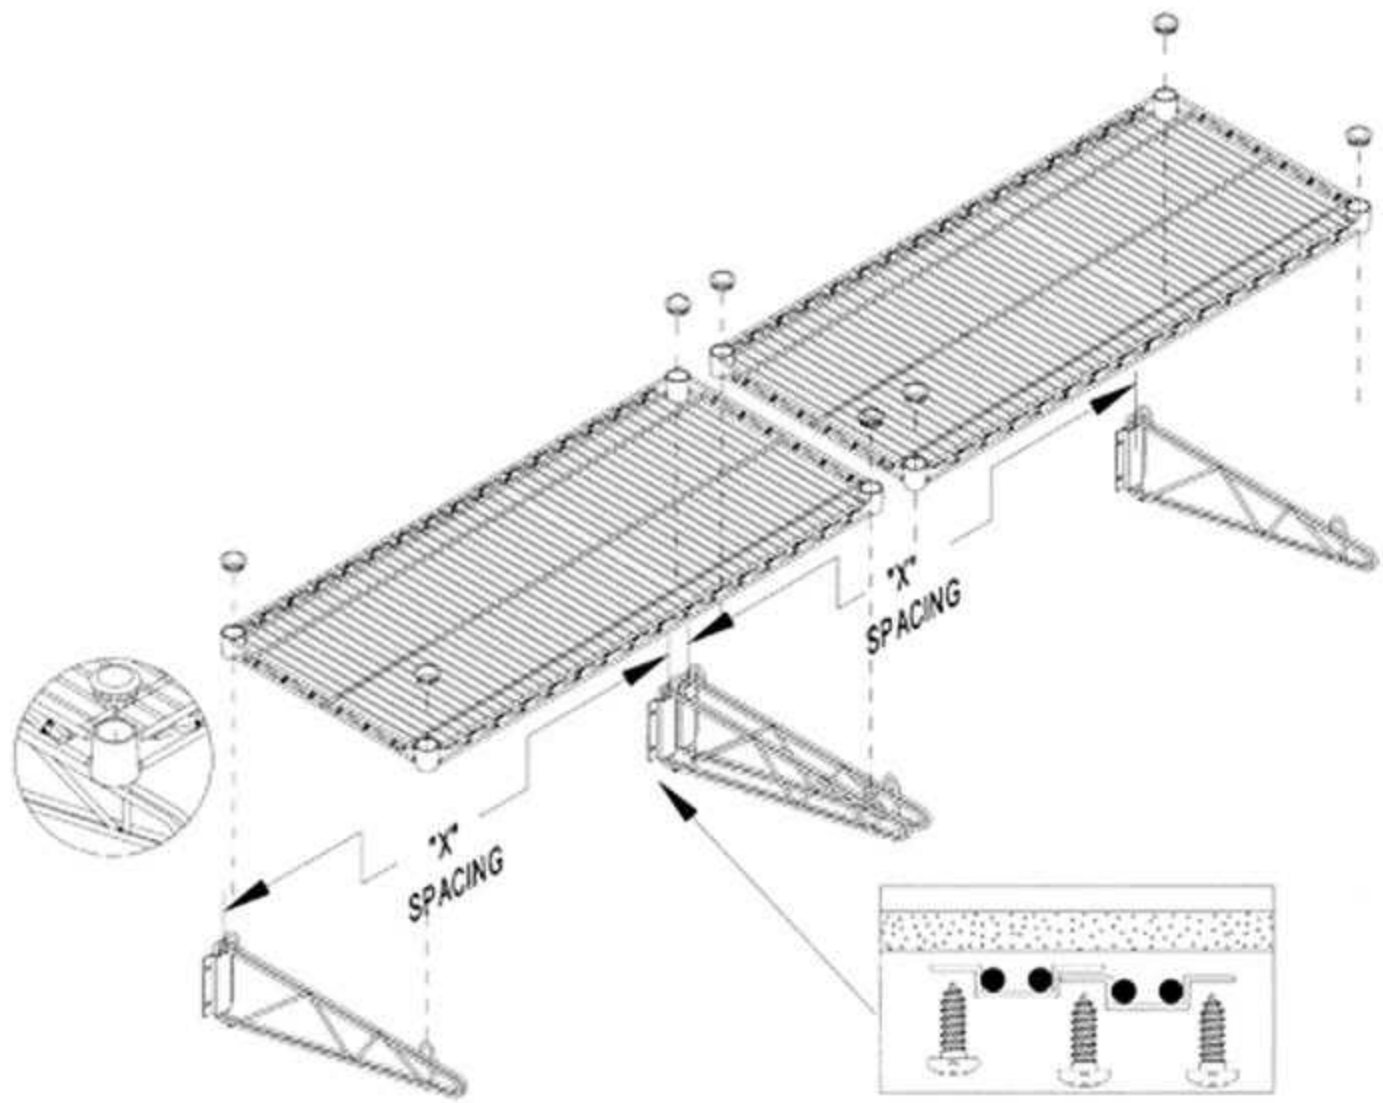

Non-adjustable wall brackets	Size (inch)	Chrome	Epoxy
Single	14"	GDSB14C	GDSB14E
	18"	GDSB18C	GDSB18E
	21"	GDSB21C	GDSB21E
	24"	GDSB24C	GDSB24E

Non-adjustable wall brackets	Size (inch)	Chrome	Epoxy
Double	14"	GDDB14C	GDDB14E
	18"	GDDB18C	GDDB18E
	21"	GDDB21C	GDDB21E
	24"	GDDB24C	GDDB24E

Adjustable Wall Brackets

Single Components [qty]

- 2 PCS Single adjustable Wall Brackets, separately packed in 2 poly bags.
- 4 PCS Chrome Collar Plugs.

Double Components [qty]

- 1 PCS Double adjustable Wall Bracket, packed in 1 poly bag.
- 4 PCS Chrome Collar Plugs.



Adjustable wall brackets	Size (inch)	Chrome	Epoxy
Single	14"	GDASB14C	GDASB14E
	18"	GDASB18C	GDASB18E
	21"	GDASB21C	GDASB21E
	24"	GDASB24C	GDASB24E

Non-adjustable wall brackets	Size (inch)	Chrome	Epoxy
Double	14"	GDADB14C	GDADB14E
	18"	GDADB18C	GDADB18E
	21"	GDADB21C	GDADB21E
	24"	GDADB24C	GDADB24E



PARTS & ACCESSORIES

SHELF DIVIDERS

Standard Features:

- Install easily without the use of bolts, nuts or clips.
- Attaches at any point along shelf. 8" high. Chrome or Epoxy finish.

Shelf dividers		Chrome	Epoxy
w x h (inch)	w x h (mm)	model no	model no
14" x 8"	355 x 200	GDAD14C	GDAD14E
18" x 8"	455 x 200	GDAD18C	GDAD18E
21" x 8"	535 x 200	GDAD21C	GDAD21E
24" x 8"	610 x 200	GDAD24C	GDAD24E




SHELF LEDGES

Standard Features:

- Snaps onto perimeter of shelf 4" high retaining ledge.

Ledges		Epoxy Finish	SS 304
w x h (inch)	w x h (mm)	model no	model no
14" x 4"	355 x 100	GDAL414C	GDAL414E
18" x 4"	455 x 100	GDAL418C	GDAL418E
21" x 4"	535 x 100	GDAL421C	GDAL421E
24" x 4"	610 x 100	GDAL424C	GDAL424E
30" x 4"	760 x 100	GDAL430C	GDAL430E
36" x 5"	910 x 100	GDAL436C	GDAL436E
42" x 4"	1070 x 100	GDAL442C	GDAL442E
48" x 4"	1220 x 100	GDAL448C	GDAL448E
54" x 4"	1370 x 100	GDAL454C	GDAL454E
60" x 4"	1520 x 100	GDAL460C	GDAL460E
72" x 4"	1830 x 100	GDAL472C	GDAL472E

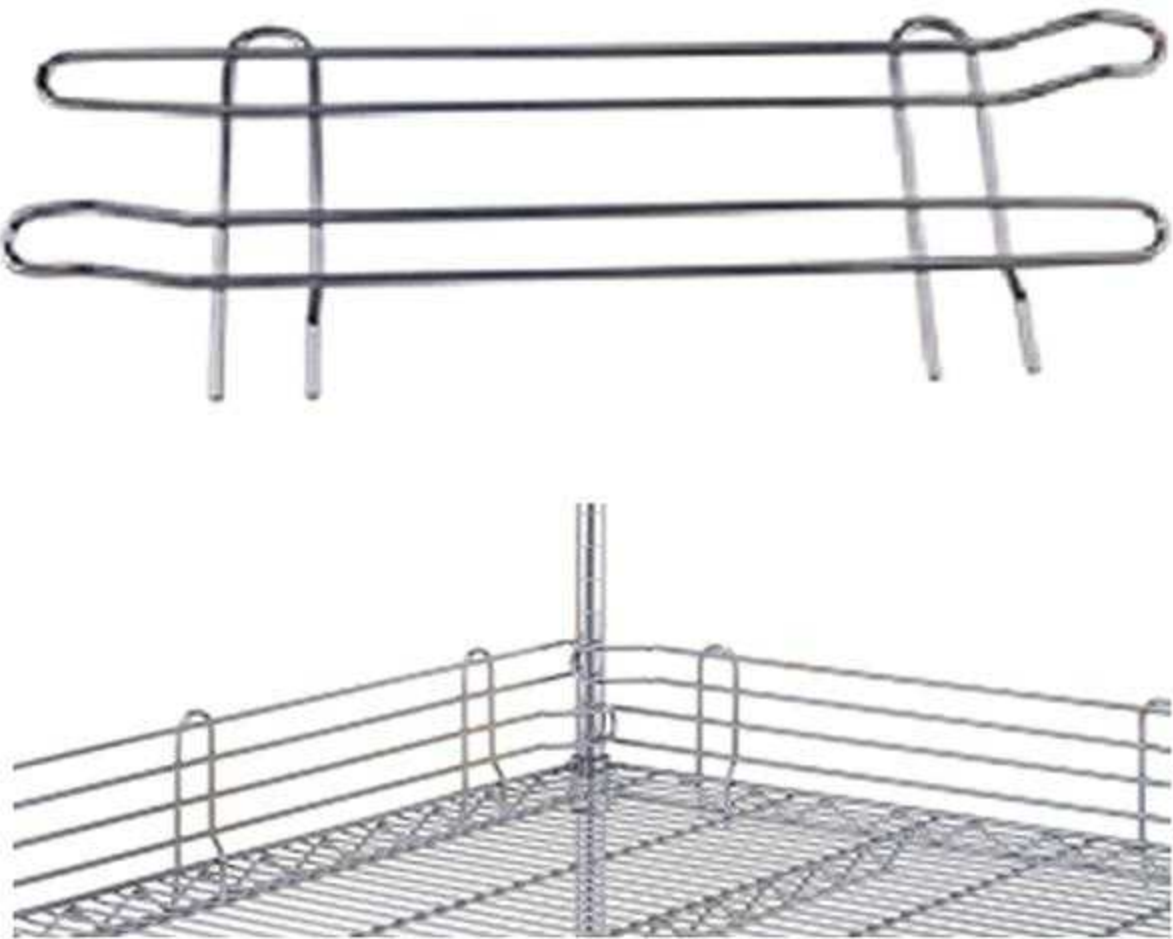

LABEL HOLDER : GDABM3



S HOOK : GDAS



POST CLAMP:GDAC



WALL MOUNT FOOD PREP AND DRYING STATION



Model no: GDWMTGRID

- Organized, convenient, sanitary.
- Grid system maximizes workstation by using vertical wall space.
- Increase efficiency and storage by keeping everything close at hand.
- Heavy duty commercial grade zinc undercoated with epoxy coating grids and components, besides some stainless steel 304 components.
- Versatile – all components fit on one grid or both.
- Mount grids horizontally or vertically to maximize wall space.



COMPONENTS



8 pcs SS 304 wall mounting brackets



6 pcs SS304 "J" hooks



6 pcs Zinc w/ Epoxy coated peg hooks



2 pcs Zinc w/Epoxy coated 24"x24"grids



1 pcs Zinc w/ Epoxy coated 13.5"x5"x7"basket



1 pcs Zinc w/ Epoxy coated 17.5"x5"x7"basket

BAKERY EQUIPMENT





DOUGH MIXER




Standard Features:

- High quality chain construction with heavy duty and high efficiency.
- Equipped with safely cover, which serve as safety cut-off.
- Complete strong stainless steel dough hook.
- Single speed, Double speed, Infinite speed for options.
- The strong stainless steel mixing bowl can revolve with the hook synchronously.



BMD8-S

Model no	Size (mm)	Bowl volume (L)	Voltage (v)	Max Flour Capacity (kg)	Max.Kneading capacity (kg)	Mixing speeding (r/min)	Net weight (kg)
BMD8-S	495*302*385	8	220V/50Hz	3	4.5	90~197r/min	45
BMD8	495*302*385	8	220V/50Hz	3	4.5	159r/min	45

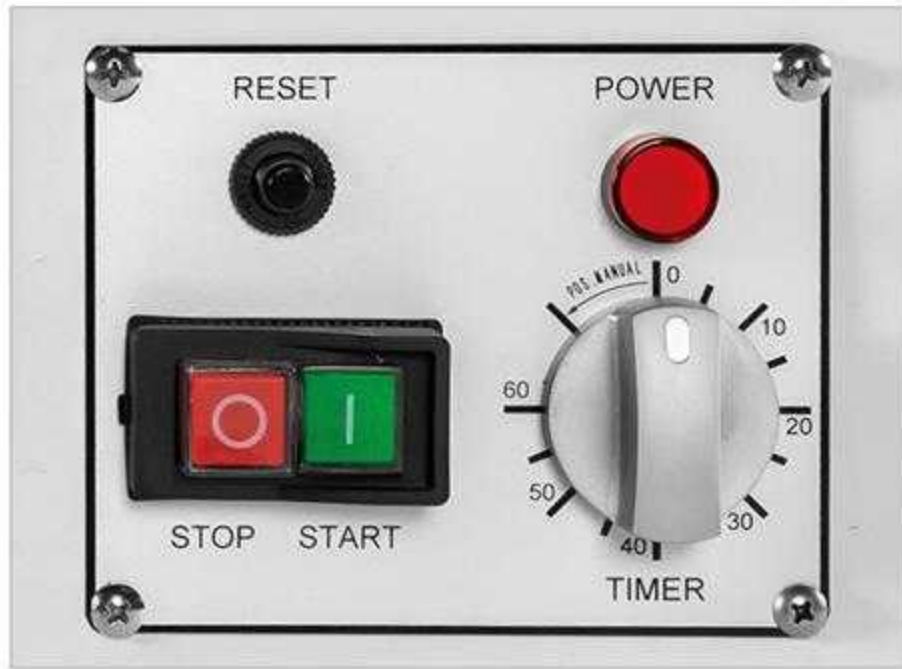

Standard Features:

- High quality chain construction with heavy duty and high efficiency.
- The lift up head design is fashion and easy to clean.
- Equipped with safely cover, which serve as safety cut-off.
- Complete strong stainless steel dough hook.
- Single speed, Double speed, Infinite speed for options.
- The strong stainless steel mixing bowl can revolve with the hook synchronously.



AT20F



AT20A



AT30F



AT30A

Model no	Size (mm)	Bowl volume (L)	Voltage (v)	Max Flour Capacity (kg)	Max.Kneading capacity (kg)	Mixing speeding (r/min)	Net weight (kg)
AT20F	753*395*705	20	220-240/380	1.1	8	158	148
AT30F	795*445*773	30	220-240/380	1.5	12	158	162
AT20A	753*395*705	20	220-240/380	1.1	8	158	127
AT30A	795*445*773	30	220-240/380	1.5	12	158	138

TABLE TOP FOOD MIXER



Standard Features:

- Table top line for different types of dough such as pizza, bread, biscuits, cream puffs, sponge cake, various sauces etc.
- Satin stainless steel casing 5 liter bowl and 7 liter bowl.
- 3 tools supplied: hook, spatula and whisk all made of stainless steel.
- A variety of colors are available.



Model no	Size (mm)	Bowl volume (L)	Voltage (v)	Power (kw)	Max.Kneading capacity (kg)	Mixing speeding (r/min)	N.W (kg)
BH5A	380*240*375	5	220-240	0.5	0.5	45-270	13.3
BH7A	380*240*405	7	220-240	0.5	1	45-270	13.8



Model no	Size (mm)	Bowl volume (L)	Voltage (v)	Power (kw)	Max.Kneading capacity (kg)	Mixing speeding (r/min)	N.W (kg)
BH5B	350*230*400	5.5	220-240	0.3	0.5	45-270	14.5
BH7B	400*250*410	7.5	220-240	0.325	1	45-270	17



Standard Features:

- Table top line for different types of dough such as pizza, bread, biscuits, cream puffs, sponge cake, various sauces etc.
- Satin stainless steel casing 5 liter bowl and 7 liter bowl.
- 3 tools supplied: hook, spatula and whisk all made of stainless steel.
- A variety of colors are available.



Model no	Size (mm)	Bowl volume (L)	Voltage (v)	Power (kw)	Max.Kneading capacity (kg)	Mixing speeding (r/min)	N.W (kg)
BH5C	410*250*425	5	220-240	0.3	0.2	45-270	12
BH7C	410*250*425	7	220-240	0.35	0.4	45-270	22

ACCESSORIES

- HOOK:** it's perfect partner with the dough, they move and touch as dance.
- BEATER:** It touch the ingredients gently and mixes to whatever you want.
- WHIP:** Mixing is an art. More air is whipped into the ingredients in less time is based in the shape,diameter,length,space, wire. And this is all about science.





PLANETARY MIXER

Notes:

- Please contact our sales team for further information and pricing on new products.
- We can also customize products according to customers' drawings.



Standard Features:

- Gear hard drive.
- All parts in contact with food are made of stainless steel 304.
- Easy operation and convenience for repairing.
- Machine is designed to do planetary motion inside the bowl in order to make the food fully blend.
- Mixers are complete with 3 types of agitator.
- They can be used for flour mixing, stuff mixing, egg beating, powder and liquid food etc.



BH10

BH50

BH80

Gear Drive Line

Model no	Size (mm)	Bowl volume (L)	Voltage (v)	Power(kw)	Flour Kneading capacity (kg)	Mixing speeding (r/min)	N.W (kg)
BH10	450*366*606	10	220	0.45	2	110/178/390	56
BH15	474*372*676	15	220	0.5	1.5	110/178/390	58
BH20	515*440*820	20	220	0.75	5	105/180/408	80
BH30	545*488*925	30	220	1.1	6	110/200/420	90

Belt Drive Line

Model no	Size (mm)	Bowl volume (L)	Voltage (v)	Power(kw)	Max.Kneading capacity (kg)	Mixing speeding (r/min)	N.W (kg)
BH40	620*630*1011	40	220	1.1	8	80/160/288	150
BH50	690*622*1200	50	380	1.5	10	74/150/288	195
BH60	724*652*1300	60	380	2.5	12	74/150/288	230
BH80	1300*840*1750	80	380	3.4	40	75/111/220	820



PLANETARY MIXER



Standard Features:

- This series is functioned through strong gear construction with American standard.
- ETL approved with every single electric part.
- Meat mincer is made of stainless steel with food hygiene approval and easy to assemble.
- Mixers are complete with 3 types of agitator for different food material operated.
- Safety system and food touchable material.

Optional:

- BJ10 without meat mincer function.
- BJ20 and BJ30 can choose meat mincer function.



Gear Driving Line

Model no	Size (mm)	Bowl volume (L)	Voltage (v)	Power(kw)	Mixing speeding (r/min)	N.W (kg)
BJ10	452*432*606	10	220	0.6	113/184/341	56
BJ20	535*496*780	20	220	1.1	108/199/382	58
BJ30	610*630*1155	30	220	1.8	84/151/270	80





DOUGH DIVIDER



Standard Features:

- Reasonable design for cutting dough evenly in range 30-180g each pcs.
- When you take out the tray machine will stop working automatically.
- Using stainless steel blades and dividing plate.
- Divided dough within 10 seconds.
- Non-stick surface, scratch resistance, sharp and durable blades.
- Cutting the dough into several flat sections.
- Powerful electric motor, low noise, enery saving.



DD-36



DD-30S

Model no	Size (mm)	Voltage (v)	Power (kw)	Capacity (g)	Dough weigh (g)	Net weight (kg)	Note
DD-36	520*410*1300	1220	0.75	36	30-100	195	hydraulic
DD-30S	650*730*1440	380	2	30	30-100	440	semi-automatic

PIZZA DOUGH ROLLER

Standard Features:

- CE standard ON/OFF switch.
- Transparant safety covers for the top and bottom rollers.
- Automatically turn the press dough, then continue the 2nd rolling process.
- Fully constructed by stainless steel.
- Roller made of resin suitable for contact food.
- Roller opening from 0.7mm to 5.4 mm max.



Model no	Size (mm)	Voltage (v)	Power (kw)	Pizza Dia. (cm)	Dough weigh (g)	Net weight (kg)
DR-30	495*490*640	220	0.37	30	50-500	37
DR-40	540*550*650	220	0.37	40	50-500	39

ELECTRIC PROOFER



Standard Features:

- Good partner for deck oven, speed up to wake up the dough.
- Strong power fan with good convection hot air inside chamber of proofer.
- Temperature and humidity can be adjustable, dough wake up more perfectly.
- Different size will be match for difference bakery shop's request.
- Automatic water in and out, prevent dry burning, easy to use.
- Mechanical knob, double adjustment of temperature and humidity, easy operation.
- The inside and outside of the machine body are all stainless steel sealing design, anti corrosion,rust resistance, fastening and durable.
- Large capacity and multi-layer, improve production efficiency.
- Easy to move the machine to every corner of the kitchen, with a lock to fix the machine.



GF-32L



GF-64L

Model no	Dimensions (mm)	Trays	Voltage (v)	Power (kw)	N.W (kg)	G.W (kg)
GF-15/16	500*705*2030	15/16	220	2600	42	60
GF-32L	684*920*2130	32	220	3000	87	127
GF-30/32	1030*705*2030	30/32	220	2800	61	80
GF-64L	1383*922*2130	64	220	4000	162	206

PIZZA OVEN



Standard Features:

- All stainless steel construction with glass door.
- Full insulated double wall body.
- Temperature range 65-400°C(150-750°F).
- Fit for 14"(35cm)/16"(40mm) frozen and fresh pizzas.
- Top and bottom heating with durable stainless steel heating element.
- Rechargeable multi protection thermostat.
- Power and ready indication lights.
- Fast cooking within 30 minutes with ready bell.



PO-12A



PO-13A

Model no	Dimensions (mm)	Cavity size (mm)	Voltage (v)	Power (w)	Pizza Dia (mm)	N.W (kg)	G.W (kg)
PO-12A	580*460*280	457*457*101.5	220-240	2200	35	19.1	20.6
PO-13A	580*460*510	350*350*100	220-240	4400	35	54.2	60
PO-16A	630*510*280	400*400*100	220-240	2400	40	22.6	24.6
PO-17A	630*510*510	400*400*100	220-240	4800	40	40.6	44.6



MACHANICAL OVEN



Standard Features:

- Heating element is evenly distributed, temperature of chamber very even, difference is in 3°C, baking product's color is evenly.
- Mechanical control panel, easy operation.
- High efficiency, only 20mins, it will take chamber temperature from room temperature to 200°C.
- Simple design, good appearance and durable, easy to clean.
- Stainless Steel body and chamber, high quality and durable.
- High quality insulation cotton makes the inner chamber insulation effect better and improves the baking quality.
- Time can be set according to request.
- Visual toughened glass can control the fermentation condition inside the box in real time, which is easy to adjust at any time.
- Built in high temperature explosion-proof bulb, can observe the whole baking state.
- The exhaust hole and heat dissipation hole can effectively prevent the high pressure in the box and prolong the service life of accessories.
- Anti scald handle can protect the baker's hands from heat, helping easily open and close the door.
- Easy to move the machine to every corner of the kitchen, with a lock to fix the machine.



GEB-11



GEB-22



GEB-36



GEB-12



GEB-24



GEB-39

Model no	Dimensions (mm)	Deck/Tray	Voltage (v)	Power (kw)	N.W.(kg)	G.W.(kg)
GEB-11	922*632*443	1/1	220	3000	48	64
GEB-12	1210*802*580	1/2	220/380	7000	80	95
GEB-13	1650*820*580	1/3	220/380	9000	96	121
GEB-22	922*650*777	2/2	220/380	6000	95	105
GEB-24	1211*806*1242	2/4	220/380	14000	150	170
GEB-26	1650*820*1300	2/6	380	18000	165	185
GEB-33	922*632*1500	3/3	220/380	9000	150	165
GEB-36	1210*810*1500	3/6	380	21000	180	200
GEB-39	1650*820*1500	3/9	380	27000	350	370

DIGITAL ELECTRIC OVEN



Standard Features:

- Heating element is evenly distributed, temperature of chamber very even, difference is in 3°C, baking product's color is evenly.
- With 12 kinds of memory menus, bring better use experience to the chef.
- High efficiency, only 20mins, it will take chamber temperature from room temperature to 200°C.
- Simple design, good appearance and durable, easy to clean.
- Stainless Steel body and chamber, high quality and durable.
- High quality insulation cotton makes the inner chamber insulation effect better and improves the baking quality.
- Time can be set according to request.
- Visual toughened glass can control the fermentation condition inside the box in realtime, which is easy to adjust at any time.
- Built in high temperature explosion-proof bulb, can observe the whole baking state.
- The exhaust hole and heat dissipation hole can effectively prevent the high pressure in the box and prolong the service life of accessories.
- Anti scald handle can protect the baker's hands from heat, helping easily open and close the door.
- Easy to move the machine to every corner of the kitchen, with a lock to fix the machine.



GED-11



GED-22



GED-12



GED-24



GED-36

Model no	Dimensions (mm)	Deck/Tray	Voltage (v)	Power (kw)	N.W.(kg)	G.W.(kg)
GED-11	922*632*443	1/1	220	3000	48	64
GED-12	1212*807*580	1/2	220/380	7000	80	95
GED-13	1650*820*580	1/3	220/380	9000	96	121
GED-22	922*632*777	2/2	220/380	6000	95	105
GED-24	1212*807*1140	2/4	220/380	14000	150	170
GED-26	1650*820*1300	2/6	380	18000	165	185
GED-33	922*632*1500	3/3	220/380	9000	150	165
GED-36	1212*807*1505	3/6	380	21000	180	200
GED-39	1650*820*1500	3/9	380	27000	350	370

MACHANICAL GAS OVEN

Standard Features:

- Special design stainless steel burner, high efficient, temperature of chamber very even, difference is within 3°C.
- Mechanical control panel, easy operation.
- High efficiency, the chamber temperature can be reach to 200°C in 20 minutes.
- Simple design, good appearance and durable, easy to clean.
- High quality insulation cotton makes the inner chamber insulation effect better andimproves the baking quality.
- Visual toughened glass can control the fermentation condition inside the box in realtime, which is easy to adjust at any time.
- Time can be set according to request.
- Built in high temperature explosion-proof bulb, can observe the whole baking state.
- High quality stainless steel body and chamber, high precision and long lasting.
- The exhaust hole and heat dissipation hole can effectively prevent the high pressure inthe box and prolong the service life of accessories.
- Anti scald handle can protect the baker's hands from heat, helping easily open andclose the door.
- Easy to move the machine to every corner of the kitchen, with a lock to fix the machine.



GGB-11



GGB-22



GGB-36



GGB-12



GGB-24



GGB-39

Model no	Dimensions (mm)	Deck/Tray	Voltage (v)	Power (kw)	Combustion power (mj/h)	N.W.(kg)	G.W.(kg)
GGB-11	1035*622*650	1/1	220	80	16	68	75
GGB-12	1310*825*645	1/2	220	100	25	80	95
GGB-13	1750*825*645	1/3	220	120	40	96	121
GGB-22	1035*622*1016	2/2	220	160	32	136	150
GGB-24	1310*825*1405	2/4	220	200	50	205	220
GGB-26	1750*825*1405	2/6	220	240	80	230	250
GGB-33	1035*622*1500	3/3	220	240	48	204	225
GGB-36	1310*825*1700	3/6	220	300	75	298	315
GGB-39	1750*825*1690	3/9	220	360	120	490	520

DIGITAL GAS OVEN

Standard Features:

- Special design stainless steel burner, high efficient, temperature of chamber very even, difference is within 3°C.
- Digital control panel, showing data more accurately. With 12 memory menus, bringbetter use experience to the chef.
- High efficiency, only 20mins, it will take chamber temperature from room temperatureto 200°C.
- Simple design, good appearance and durable, easy to clean.
- Stainless Steel body and chamber, high quality and durable.
- High quality insulation cotton makes the inner chamber insulation effect better andimproves the baking quality.
- Time can be set according to request.
- Visual toughened glass can control the fermentation condition inside the box in realtime, which is easy to adjust at any time.
- Built in high temperature explosion-proof bulb, can observe the whole baking state.
- The exhaust hole and heat dissipation hole can effectively prevent the high pressurein the box and prolong the service life of accessories.
- Anti scald handle can protect the baker's hands from heat, helping easily open andclose the door.
- Easy to move the machine to every corner of the kitchen, with a lock to fix the machine.



GGD-11



GGD-22



GGD-36



GGD-12



GGD-24



GGD-39

Model no	Dimensions (mm)	Deck/Tray	Voltage (v)	Power (kw)	Combustion power (mj/h)	N.W.(kg)	G.W.(kg)
GGD-11	1035*622*650	1/1	220	80	16	68	75
GGD-12	1310*825*645	1/2	220	100	25	80	95
GGD-13	1750*825*645	1/3	220	120	40	96	121
GGD-22	1035*622*1016	2/2	220	160	32	136	150
GGD-24	1310*825*1405	2/4	220	200	50	205	220
GGD-26	1750*825*1405	2/6	220	240	80	230	250
GGD-33	1035*622*1500	3/3	220	240	48	204	225
GGD-36	1310*825*1700	3/6	220	300	75	298	315
GGD-39	1750*825*1690	3/9	220	360	120	490	520



ALUMINUM PIZZA PEEL

Standard Features:

- Sharp edge for square pizza peel 12 inch 13 inch 14 inch available.
- Customized blade design available.
- Screw fixed.
- Grip with 360° rotating hook available.
- Colorful handle customized available.



Anodized aluminum square perforated pizza peel

Model no	Pizza Peel Dia (cm/inch)	Handle Length (cm)	Overall Length (cm)	MOQ
SP-1	30/12	36	66	50
SP-2	30/13	60	90	50
SP-3	30/14	90	120	50
SP-4	30/15	120	150	50
SP-5	30/16	150	180	50
SP-6	35/14	36	71	50
SP-7	35/14	60	95	50
SP-8	35/14	90	125	50
SP-9	35/14	120	155	50
SP-10	35/14	150	185	50
SP-11	40/16	36	76	50
SP-12	40/16	60	100	50
SP-13	40/16	90	130	50
SP-14	40/16	120	160	50
SP-15	40/16	150	190	50
SP-16	33/13	36	70	50
SP-17	33/13	60	95	50
SP-18	33/13	90	125	50
SP-19	33/13	120	153	50
SP-20	33/13	150	183	50



Stainless steel pizza peel detached-combine handle

Model no	Pizza Peel Dia (cm/inch)	Overall Length (cm)	MOQ
SSC-1	20	60-80	20
SSC-2	20	100-120	20



BRUSH



Cooper bristles stainless steel oven brush with ash rake function

Model no	Pizza Peel Dia (cm/inch)	Handle Length (cm)	Overall Length (cm)	MOQ
SOC-1	16	80	81	20
SOC-2	16	120	121	20

PIZZA CUTTER

CPizza cutter 4" black | 430SS +PP

Model no	MOQ
CBL	10
CDH	10
CSS	10



CBL

CDH

CSS

OIL CAN

Oil can cone | SS304

Model no	Capacity (L)	MOQ
OCC-1	0.35	24
OCC-2	0.5	24
OCC-3	1	24



TOOL KIT SET



FOOD PROCESSING EQUIPMENT





MEAT SLICER



Standard Features:

- Belt inside the machine also from Italy.
- Every slicer has a blade sharpener which will extend the service life of the blade.
- The blade we use is made of carbon steel with chrome coated, from Italy.
- Cutting thickness: 1-12mm.
- Cutting height: 145mm.



GD-195



GD-220

Model no	Dimensions (mm)	Blade	Cutting length (mm)	Voltage (v)	Power (kw)	N.W (kg)
GD-195	384*232*280	195mm(7 inches)	180	220-240	150	11.7
GD-195L	384*232*280	430 r/min	180	220-240	150	11.7
GD-220	420*265*390	220mm(8 inches)	200	220-240	240	14.8
GD-220 L	420*265*390	282 r/min	200	220-240	240	14.8



Standard Features:

- Belt inside the machine also from Italy.
- Every slicer has a blade sharpener which will extend the service life of the blade.
- The blade we use is made of carbon steel with chrome coated, from Italy.
- Cutting thickness: 1-12mm.
- Cutting height: 145mm.



GD-250



GD-275



GD-300

Model no	Dimensions (mm)	Blade	Cutting length (mm)	Voltage (v)	Power (kw)	N.W (kg)
GD-250	420*265*390	250mm(10 inches)	200	220-240	240	15.2
GD-250L	420*265*390	282r/min	200	220-240	240	15.2
GD-275	420*265*390	275mm(11 inches)	200	220-240	240	16.8
GD-275L	420*265*390	282r/min	200	220-240	240	16.8
GD-300	600*490*480	300mm(12 inches)	250	220-240	380	21.3
GD-300L	600*490*480	280r/min	250	220-240	380	21.3

ACCESSORIES



Italy carbon steel blade



Italy belt



Blade sharpener for free



L Style



KEBAB SLICER



Standard Features:

- Full stainless steel blade cover.
- Adjustment ring and screw for desired thickness.
- Metal anti-slip body, ergonomic design, safe and easy handling.
- Wear-resistant switch.
- The front part is easily detachable for cleaning.
- One smooth blade included in the unit and one serrated blade included in the package.
- An adapter included.




Model no	Voltage	Power (w)	Speed (rpm)	Cutting Depth (mm)	Blade Dia(mm)	Capacity	N.W (kg)
GDKS100E	220-240 110-120	80	6500	0-8	100	60 kg/h	1.4
GDKS100T	220-240 110-120	80	6500	0-8	100	60 kg/h	1.25
GDKS100C	220-240 110-120	80	6500	0-8	100	Li-ion 12 V 2.0 Ah	1.5

VEGETABLE CUTTER



Standard Features:

- Versatile and efficient: you can quickly process food to achieve different results with an excellent finish.
- Utmost hygiene: the components are manufactured from materials suitable for food handling and can be easily removed for fast cleaning.
- Ventilated motor: powerful and low-noise can perform all processes effortlessly.
- Controls with low voltage (24V) switch.
- Machines conforming to CE hygiene and safety standards.
- Discs and blades for all kinds of processing.

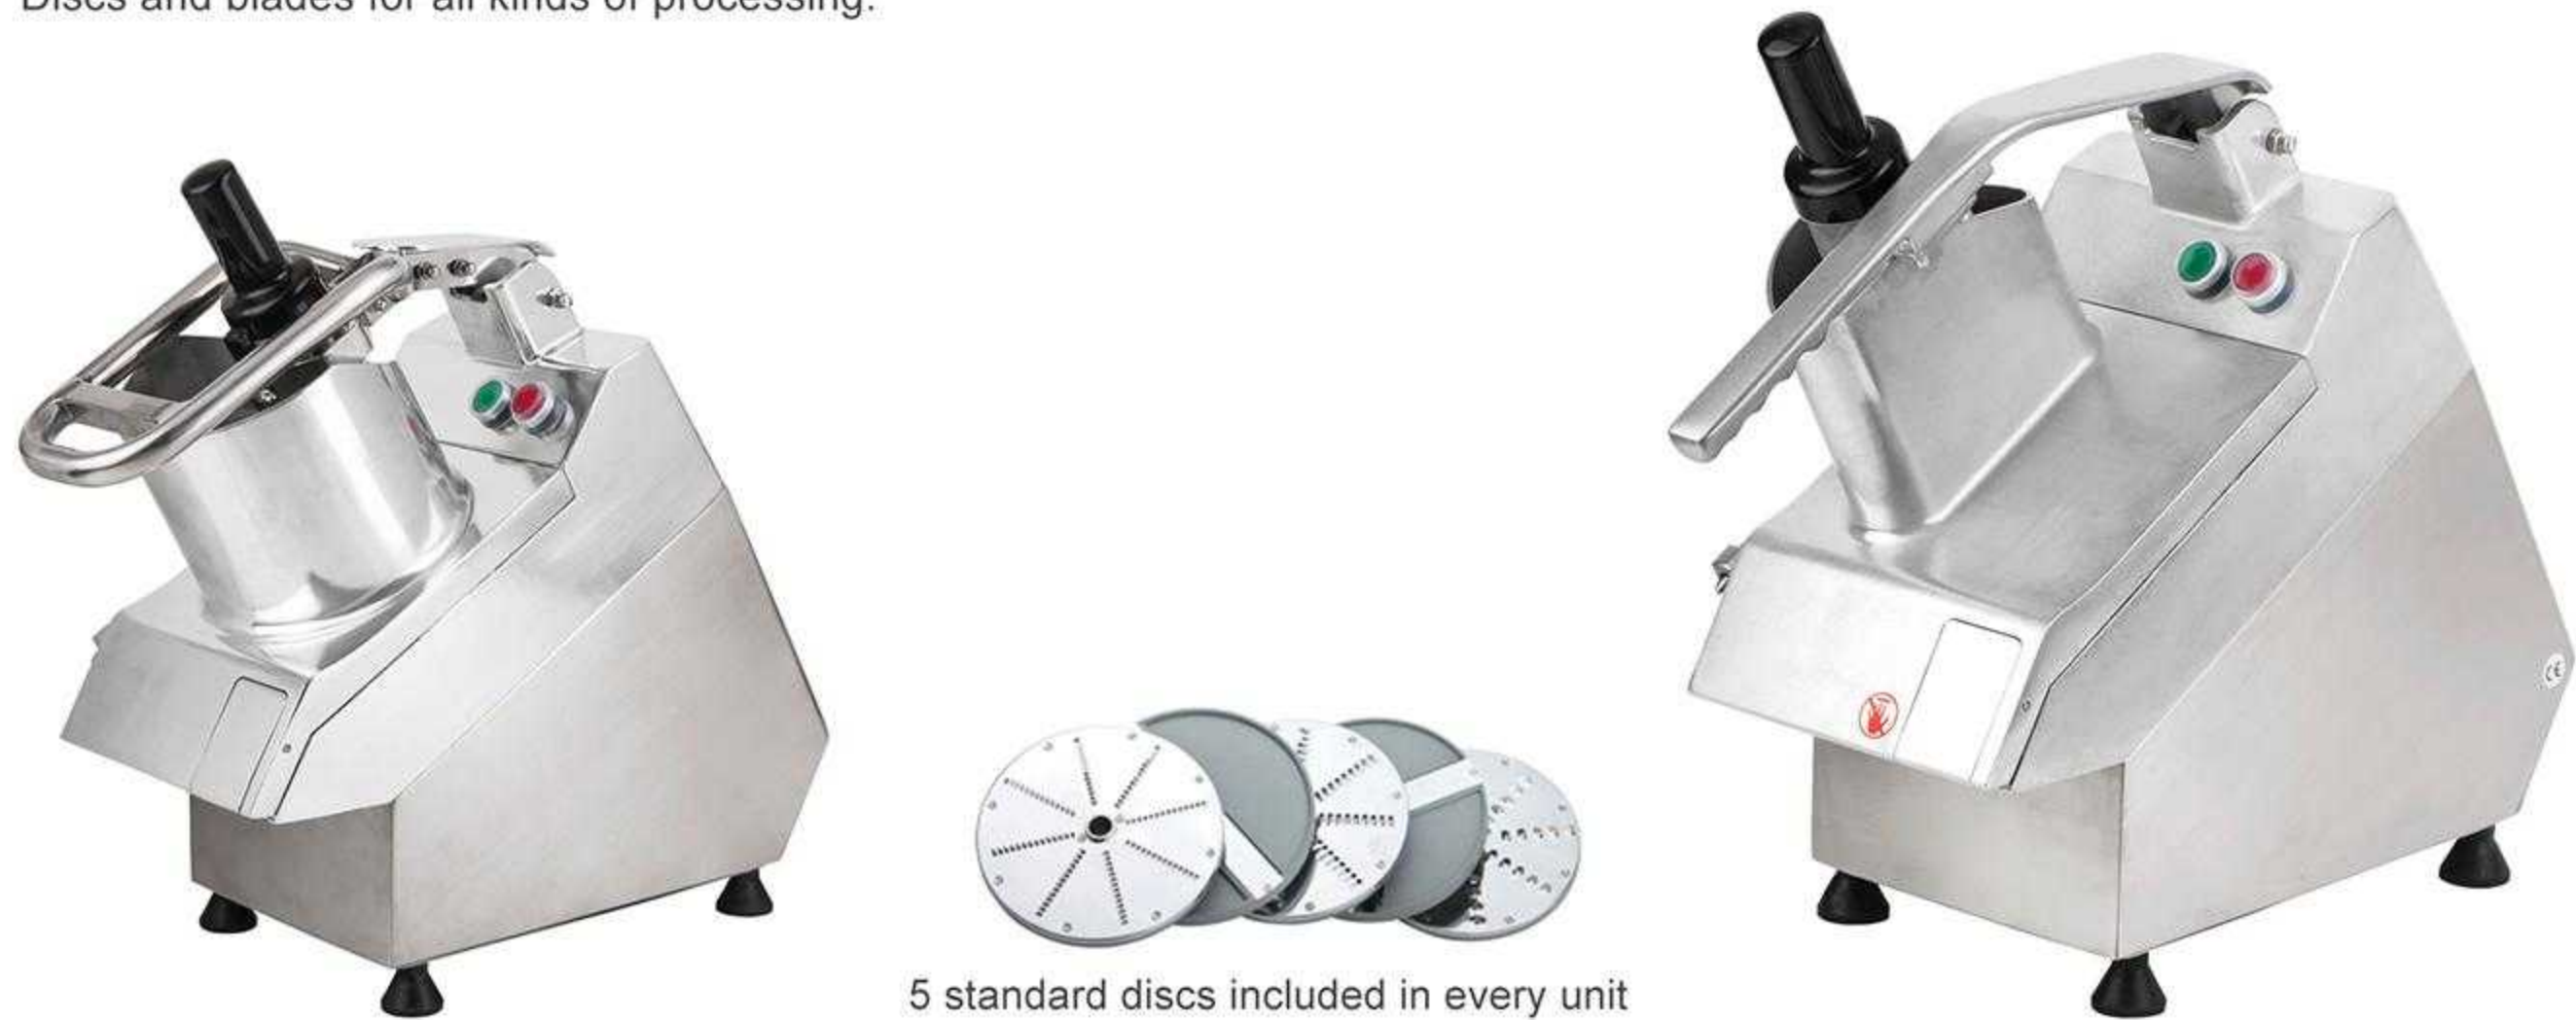

Model no	Voltage	Power (w)	N.W (kg)
GDVC60MS	220-240 110-120	550	24.4

Model no	Voltage	Power (w)	N.W (kg)
GDVC65MS	220-240 110-120	750	24.9

SAUSAGE SLICER



Standard Features:

- Currywurst slicer.
- Stainless steel corresponds to the european food product standards.
- Base plate with suction pads.
- Simple operation and easy to clean.



Model no	Dimensions (mm)	N.W (kg)	G.W (kg)	Packing Size (mm)
HSS8	340*155*210	2.32	2.62	340*175*235
HSC45	225*185*325	7.1	7.5	290*245*365

MEAT MINCER-ALUMINUM BODY



Standard Features:

- body made by aluminum-magnesium alloy.
- anodic oxidation treatment.
- all parts contacted food are made of stainless steel.



Model no	Dimensions (mm)	Output per hour(kg)	Voltage (v)	Power (w)	N.W (kg)
GDHM120	472*220*377	120	230 110	850	20.8
GDHM220	493*220*397	220	230 110	1100	23.2



CUTTING MIXER



Standard Features:

- Sepecially suitable for meat products.
- Simple operation and professional use.
- Bladespeed: 1450 rpm.



GDHLQ8



GDHLQ14

Model no	Dimensions (mm)	Bowl speed (rpm)	Bowl diameter (mm)	Max volume (kg)	Voltage (v)	Power (kw)	N.W (kg)
GDHLQ8	680*441*385	18	385	4	230V I 110V	550	37
GDHLQ14	760*515*452	17	460	7	230V I 110V	750	54

FOOD CUTTING MACHINE



Standard Features:

- Made by stainless steel.
- Continuous speed control.
- Dural safety protection.
- Food can be added at any time during working.
- Suitable for vegetables and fruits(including cut, chopped,stir, rubbing).



GDHR9



GDHR12

Model no	Dimensions (mm)	Volume (L)	Speed (rpm)	Voltage (v)	Power (kw)	N.W (kg)
GDHR6	317*523*394	6	1000-2000	230 I 110	1800	18.6
GDHR9	317*523*444	9	1000-2500	230 I 110	1800	20.4
GDHR12	317*523*489	12	1000-2500	230 I 110	2000	21.75

HAMBURGER MACHINE



Standard Features:

- Hamburger machine 100 /130/150mm.
- Patty thickness: 15-18mm.
- Manual operation.



Model no	Dimensions (mm)	Meat diameter (mm)	N.W (kg)
GDHBM100	290*210*275	100	5.24
GDHBM130	290*210*275	130	5.62
GDHBM150	290*210*275	150	5.82

TOMATO CUTTER



Model no	Dimensions (mm)	Meat diameter (mm)	N.W (kg)
GDTC400	430*200*195	4	5.18
GDTC550	430*200*195	5	4.92



IMMERSION BLENDER



Standard Features:

- Particulaly suited for ice cream shops, confectionery, restaurants and hotels etc.
- Elegant design and available in 4 motor sizes to meet the demands of any kitchens.
- Ventilated motor, thermal overload protection.
- Fixed speed and variable speed option.
- Fully detachable stainless steel tubes available in 9 lengths.
- All food contact parts in stainless steel.



GDIB220MF GDBLD160 GDWIK185

GDIB220MF/GDIB220MV	
Power	220W
Speed	20000rpm / 4000-20000rpm
Voltage	220V-240V~ 50/60Hz 110V-120V~ 60Hz
N.W./G.W.	1.14kg
Packing Size	112*75*304mm

GDBLD160	
Length	160mm
Dia.	Ø25mm
N.W.	0.51kg

GDWIK185	
Length	185mm
N.W.	0.83kg
Use for IB220MV only	/



GDIB350CF GDIBLF500

GDIB350CF/GDIB350CV	
Power	350W
Speed	16000rpm / 4000-16000rpm
Voltage	220V-240V~ 50/60Hz 110V-120V~ 60Hz
N.W./G.W.	1.80kg
Packing Size	163*91*359mm

GDIB500LF/GDIB500LV	
Power	500W
Speed	16000rpm / 4000-16000rpm
Voltage	220V-240V~ 50/60Hz 110V-120V~ 60Hz
N.W./G.W.	1.95kg
Packing Size	163*91*359mm

IMMERSION BLENDER



Use for GDIB350CV / GDIB500LV only

Model No	BLD200	BLD250	BLD300	BLD350	BLD400	BLD450	BLD500	BLD550	WLK250
Length (mm)	200	250	300	350	400	450	500	550	250
Dia. (mm)	Ø35	Ø35	Ø35	Ø35	Ø35	Ø35	Ø35	Ø35	/
N.W. (kg)	0.75	0.84	1	1.16	1.33	1.48	1.63	1.78	0.9

OPTIONAL ATTACHMENTS



Wall Hanger for immersion blender



Support bracket for immersion blender

COOKING EQUIPMENT






HOT PLATES




Standard Features:


- High quality stainless steel, corrosion resistant and easy cleaning.
- Heavy duty cast iron grates and burner, great cooking performance.
- Adjustable pilot light.
- Chromed knob, efficient control.
- Natural gas/LP conversion kit included.
- Adjustable stainless steel feet.
- Slide in and out oil tray.
- 3/4" NPT rear gas connection inlet.
- Mounting type: freestanding.
- Gas type and Pressure: 4"Natural/10"propane gas.
- ETL certificate.
- Usage scenario: Kitchen, Outdoor.

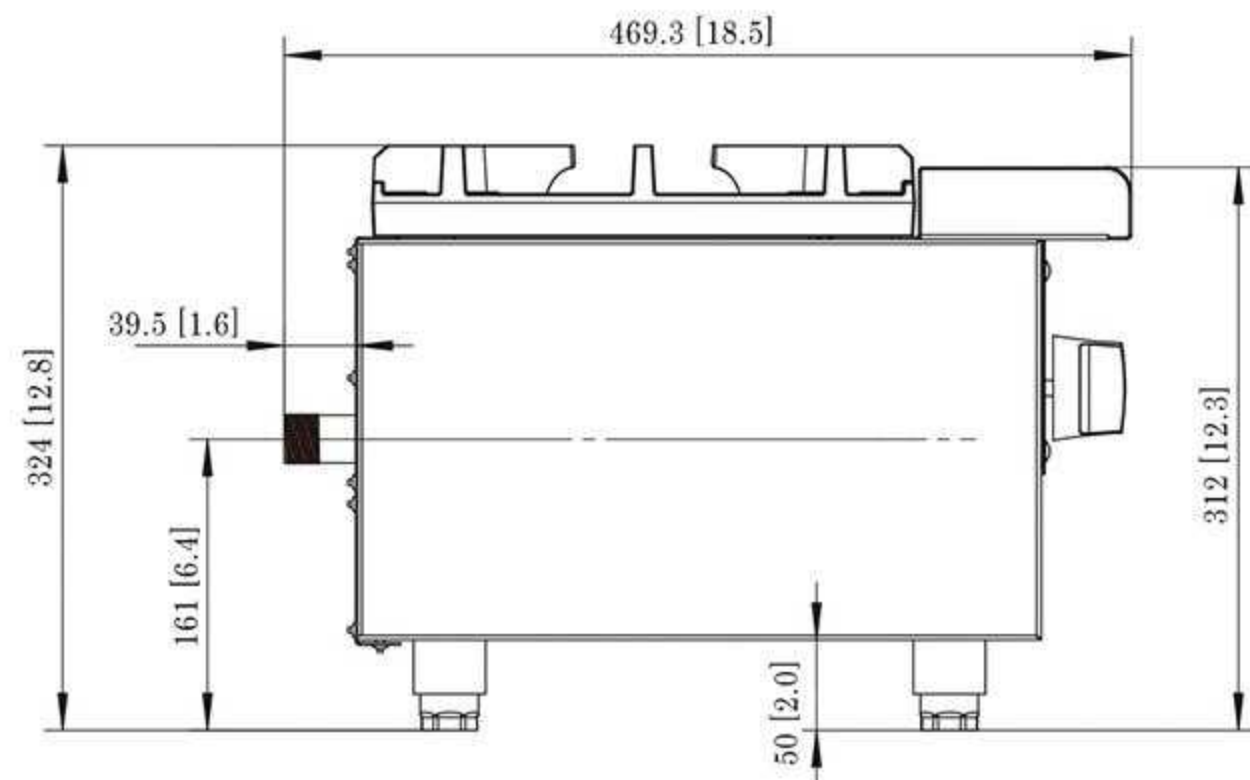


GDHP112

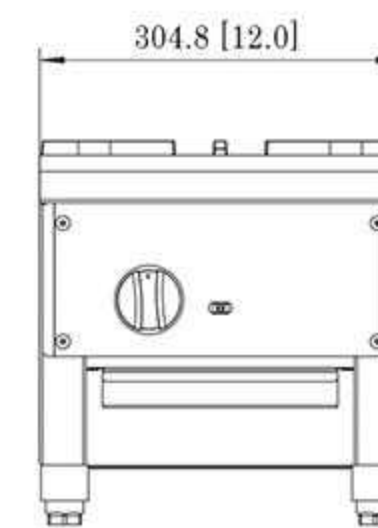


GDHP112

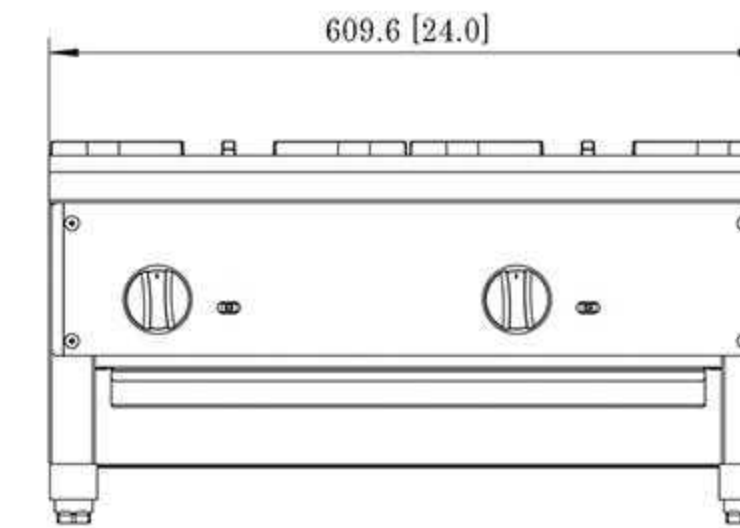

GDHP224

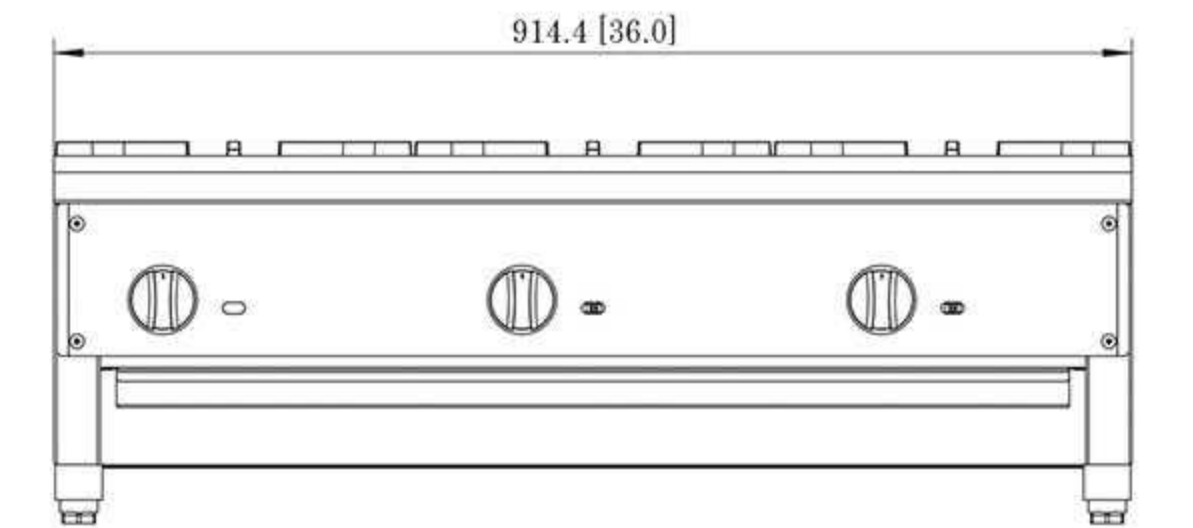

GDHP336

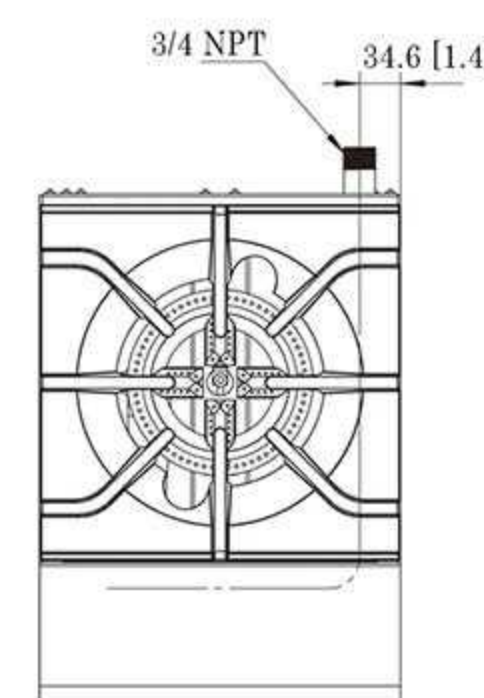

GDHP224



GDHP336

Model no	Product Dimensions WxDxH (inch)	Burners and Control method	Gas type	Intake-tube Pressure (in.W.C.)	Total BTU B.T.U./h	Power (kw)	Gross Weight (lb)	40HQ load capacity
GDHP-112	12*18.5*13	1 burner,independent manual control	3NG	4	28000	8.2	35	900
			LP	10	28000			
GDHP-224	24*18.5*13	2 burner,independent manual control	NG	4	56000	16.4	60	520
			LP	10	56000			
GDHP-336	36*18.5*13	3 burner,independent manual control	NG	4	84000	24.6	85	350
			LP	10	84000			










HOT PLATES



Standard Features:

- High quality stainless steel, corrosion resistant and easy cleaning.
- Heavy duty cast iron grates and burner, great cooking performance.
- Adjustable pilot light.
- Chromed knob, efficient control.
- Natural gas/LP conversion kit included.
- Adjustable stainless steel feet.
- Slide in and out oil tray.
- 3/4" NPT rear gas connection inlet.
- Mounting type: freestanding.
- Gas type and Pressure: 4"Natural/10"propane gas.
- ETL certificate.
- Usage scenario: Kitchen, Outdoor.

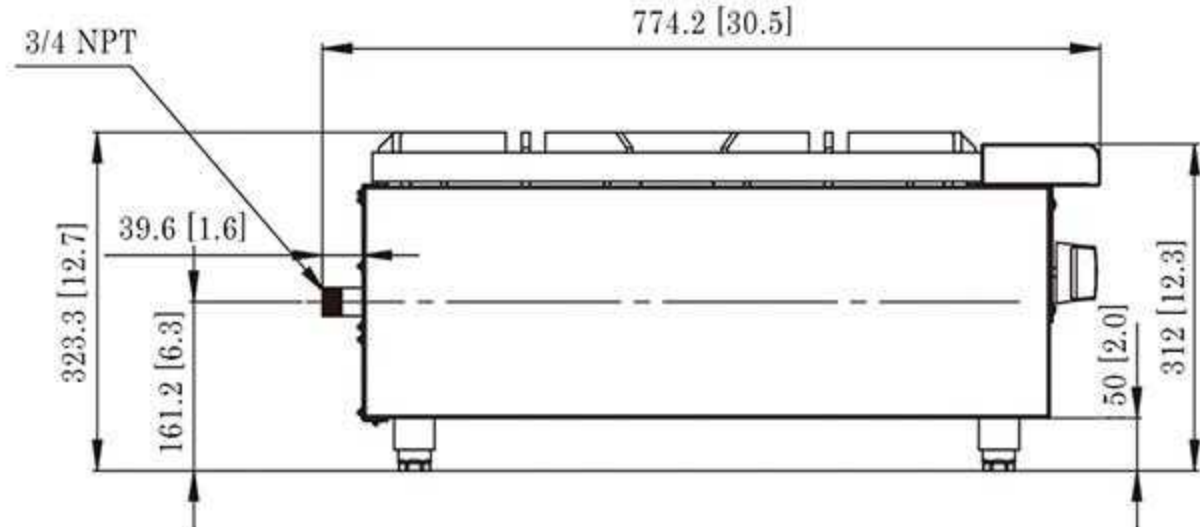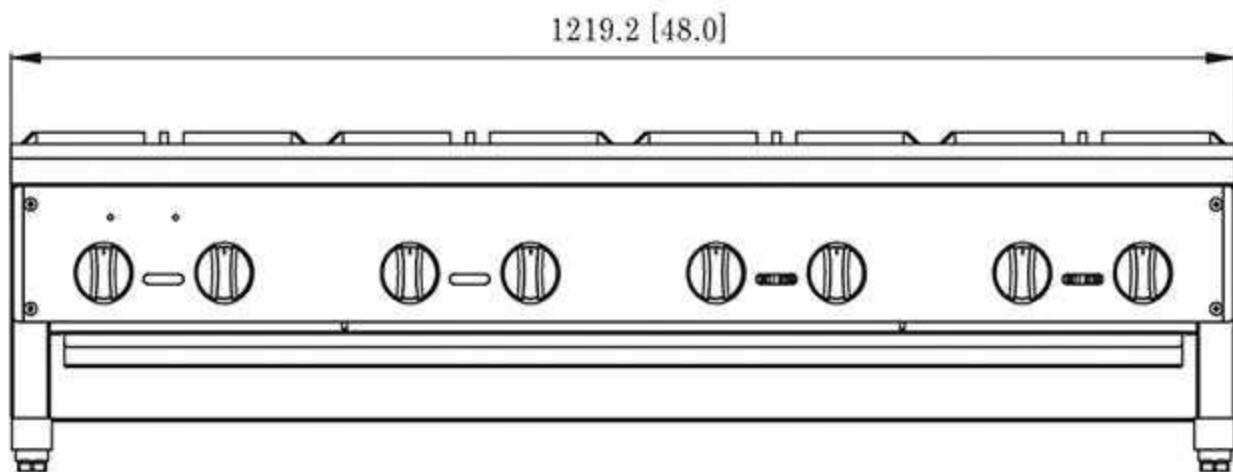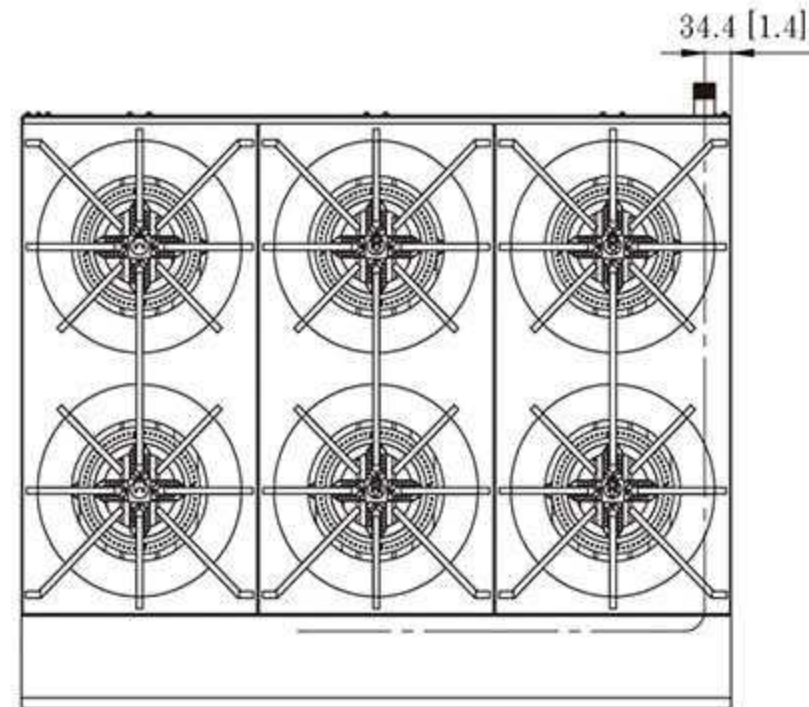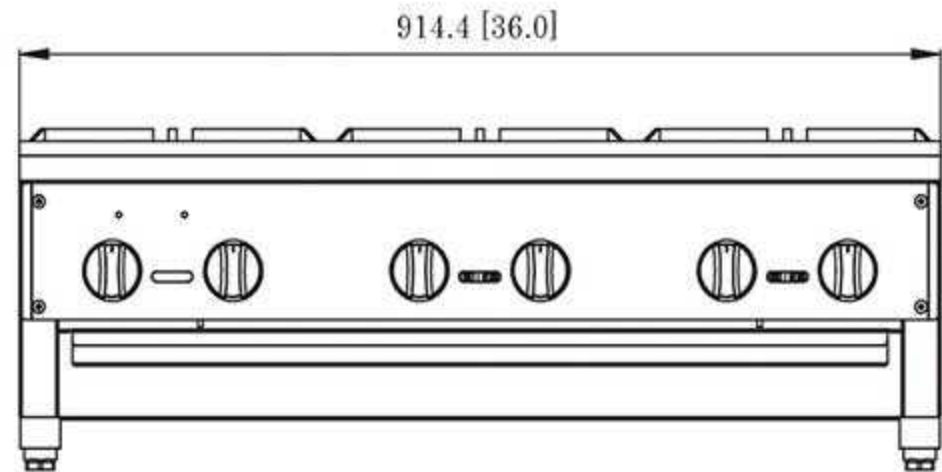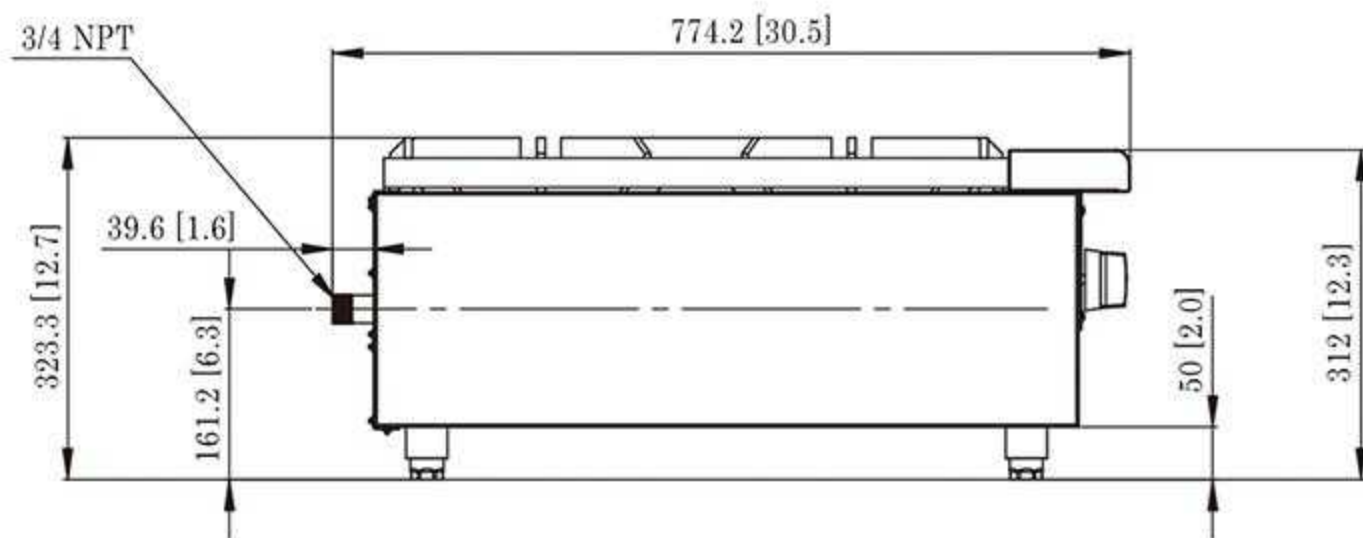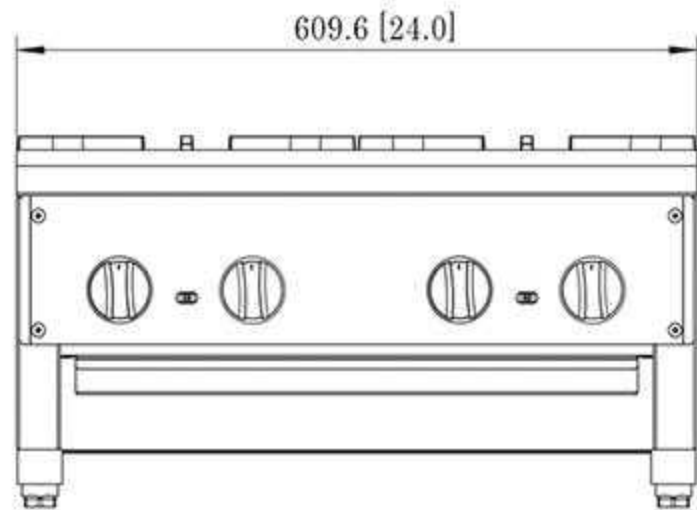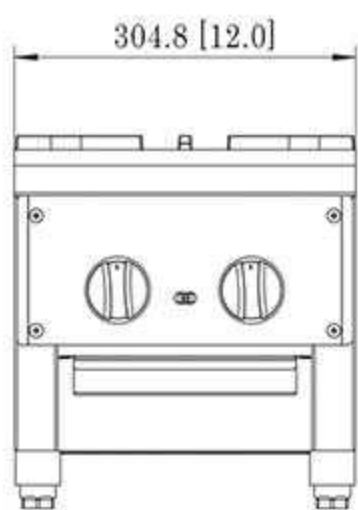

GDHP212



GDHP424



GDHP636



GDHP848

Model no	Product Dimensions WxDxH (inch)	Burners and Control method	Gas type	Intake-tube Pressure (in.W.C.)	Total BTU B.T.U./h	Power (kw)	Gross Weight (lb)	40HQ load capacity
GDHP212	12*30.5*13	2 burner,independent manual control	NG LP	4 10	56000 56000	16.4	67.4	620
GDHP424	24*30.5*13	4 burner,independent manual control	NG LP	4 10	112000 112000	32.8	110.2	310
GDHP636	36*30.5*13	6 burner,independent manual control	NG LP	4 10	168000 168000	49.2	160	130
GDHP848	36*30.5*13	8 burner,independent manual control	NG LP	4 10	224000 224000	65.6	210	90



Burner control valve



Connecting hole



Adjustable stainless steel legs





GAS GRIDDLES



Standard Features:

- High quality stainless steel, corrosion resistant and easy cleaning.
- Heavy duty cast iron grates and burner, great cooking performance.
- Adjustable pilot light.
- Chromed knob, efficient control.
- Natural gas/LP conversion kit included.
- Adjustable stainless steel feet.
- Slide in and out oil tray.
- 3/4" NPT rear gas connection inlet.
- Mounting type: freestanding.
- Gas type and Pressure: 4"Natural/10"propane gas.
- ETL certificate.
- Usage scenario: Kitchen, Outdoor.



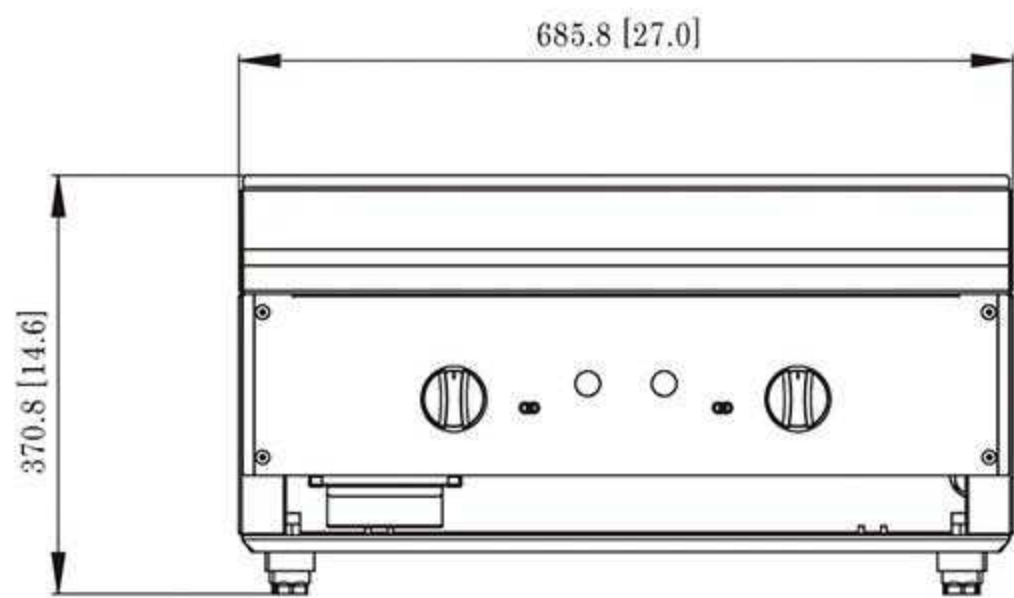
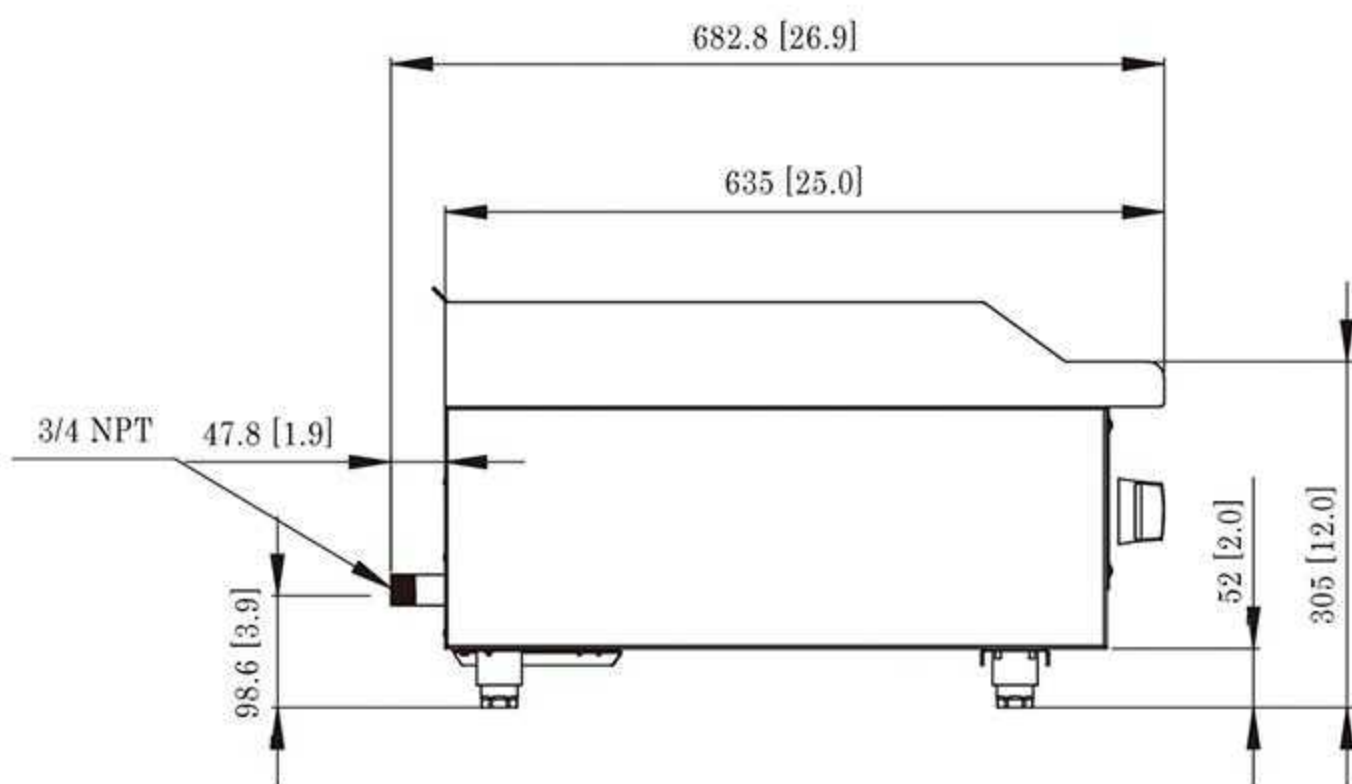


GDGEG12



GDGEG24

Model no	Product Dimensions WxDxH (inch)	Burners and Control method	Gas type	Intake-tube Pressure (in.W.C.)	Total BTU B.T.U./h	Power (kw)	Gross Weight (lb)	40HQ load capacity
GDGEG12	12*27*15	1 burner,independent manual control	NG	4	22000	6.4	82	558
			LP	10	22000			
GDGEG24	24*27*15	2 burner,independent manual control	NG	4	44000	12.9	130	270
			LP	10	44000			

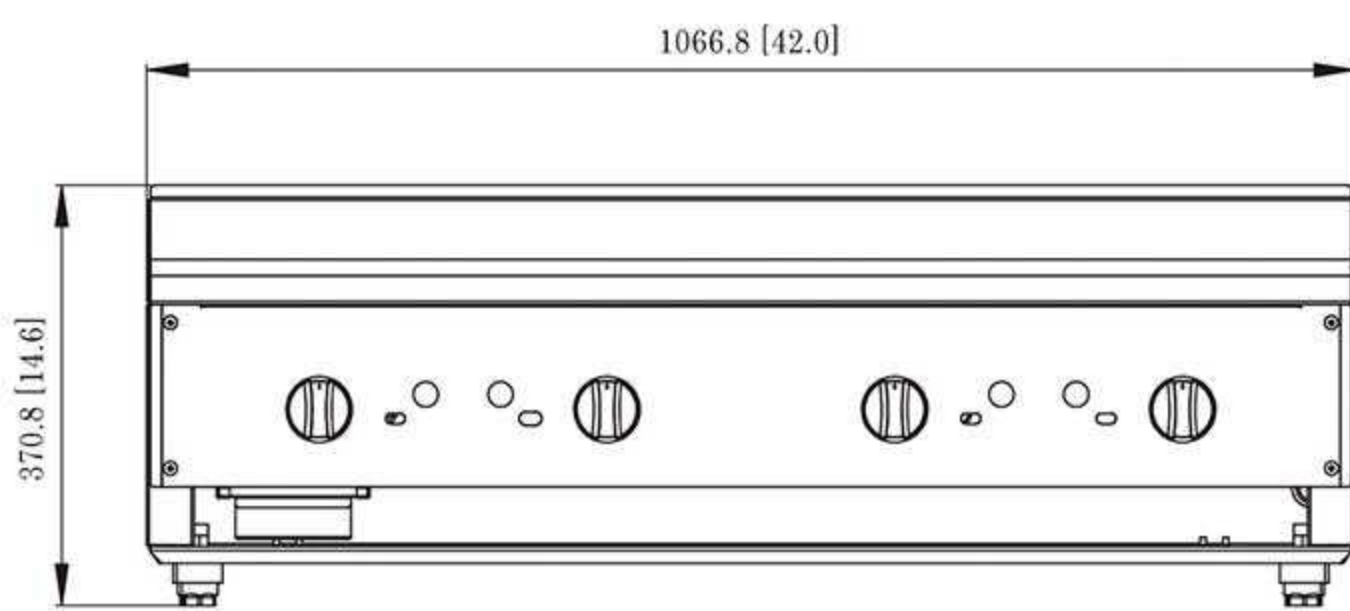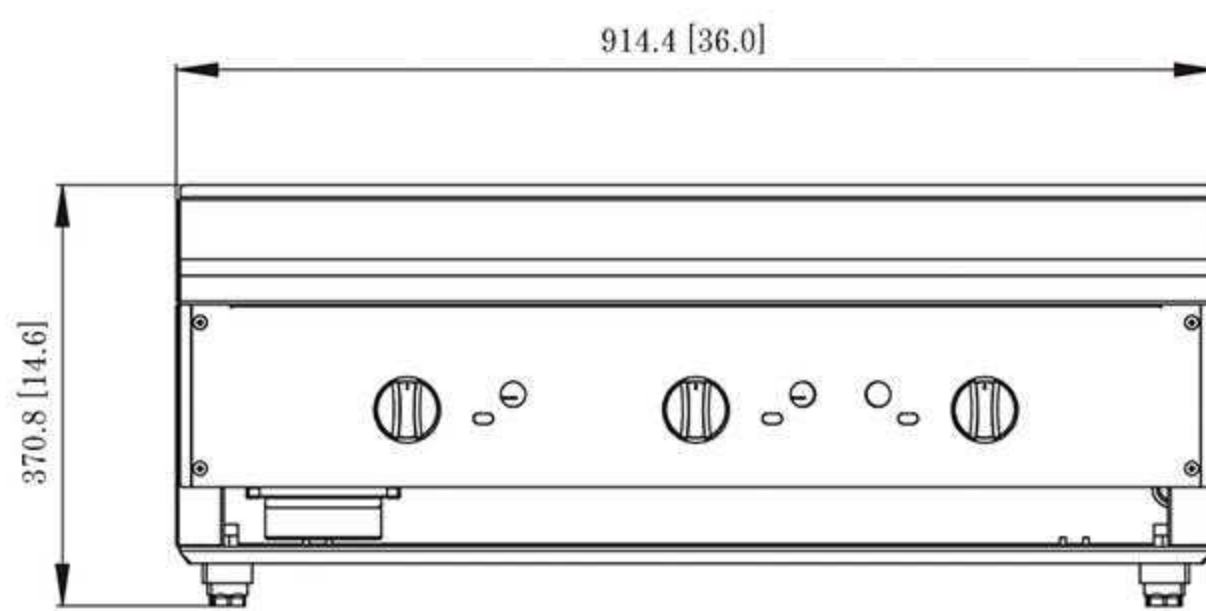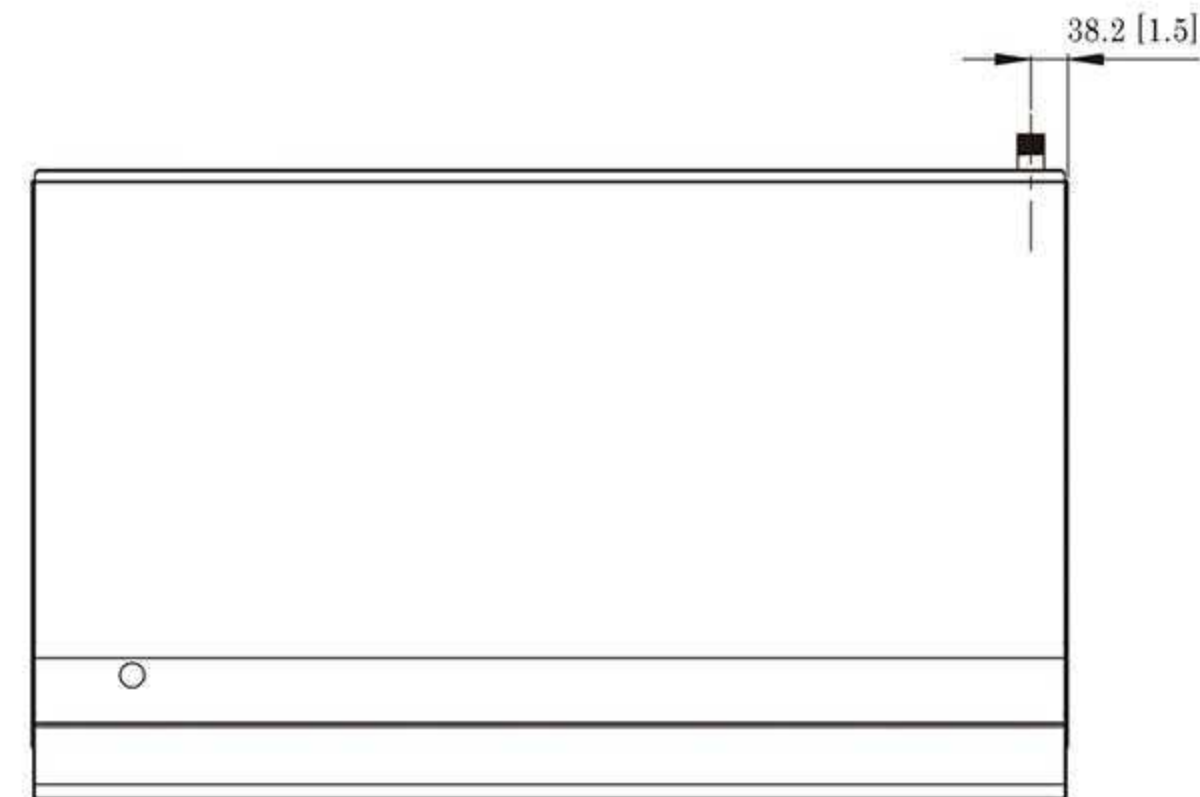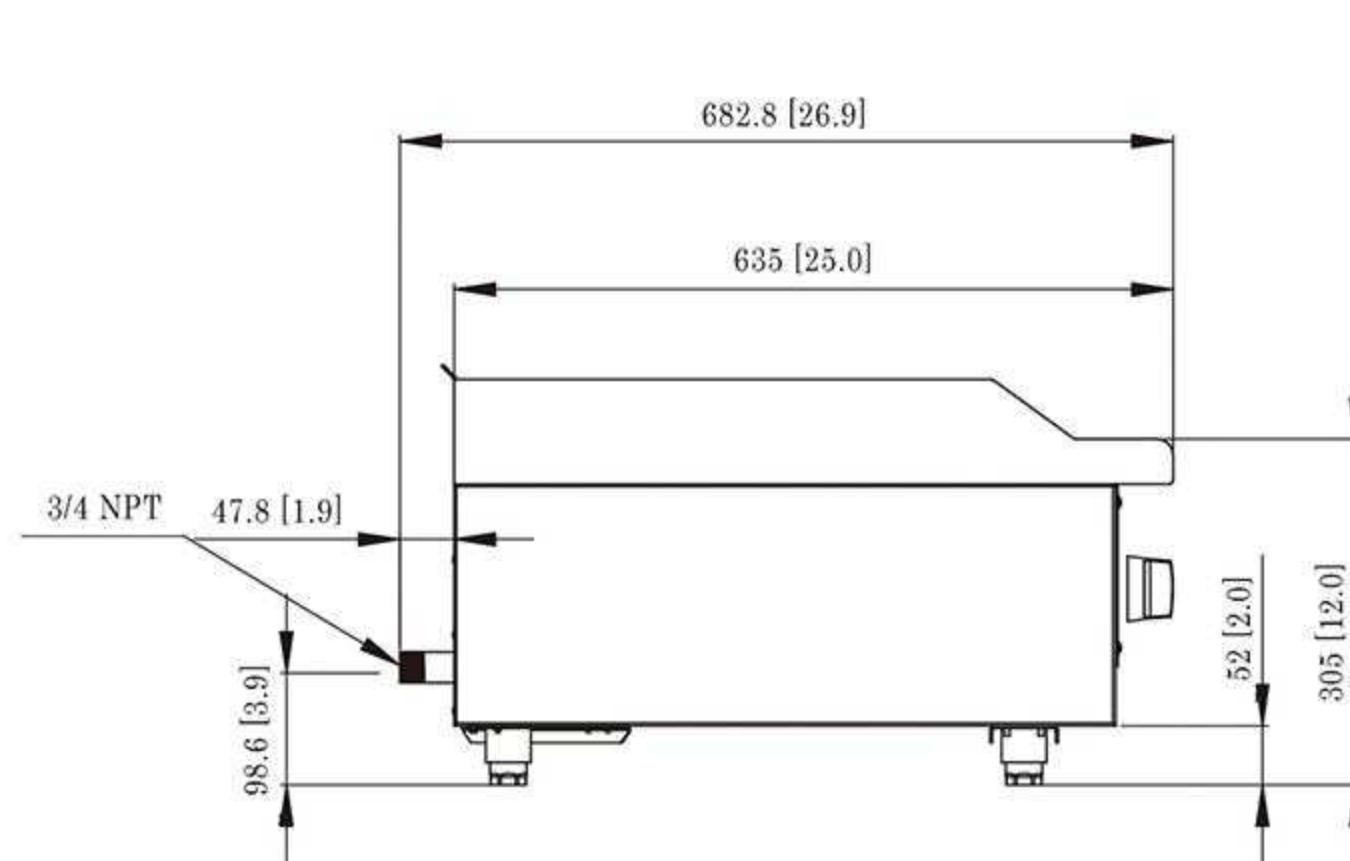

GDGEG36



GDGEG48

Model no	Product Dimensions WxDxH (inch)	Burners and Control method	Gas type	Intake-tube Pressure (in.W.C.)	Total BTU B.T.U./h	Power (kw)	Gross Weight (lb)	40HQ load capacity
GDGEG36	36*27*15	3 burner,independent manual control	NG	4	66000	19.3	188	165
			LP	10	66000			
GDGEG48	47*27*15	4 burner,independent manual control	NG	4	88000	25.6	250	135
			LP	10	88000			



GAS CHARBROILERS



Standard Features:

- High quality stainless steel, corrosion resistant and easy cleaning.
- U shape burner provides even heat distribution, great cooking performance.
- Adjustable pilot light.
- Chromed knob, efficient control.
- Adjustable stainless steel feet.
- Slide in and out oil tray.
- 3/4" NPT rear gas connection and regulator standard.
- Mounting type: freestanding.
- Gas type and Pressure: 4"Natural/10"propane gas.
- ETL certificate.
- Usage scenario: Kitchen, Outdoor



GDLRB12



GDLRB24

Model no	Product Dimensions WxDxH (inch)	Burners and Control method	Gas type	Intake-tube Pressure (in.W.C.)	Total BTU B.T.U./h	Power (kw)	Gross Weight (lb)	40HQ load capacity
GDLRB12	12*27*15	1 burner,independent manual control	NG	4	28000	8.2	68	558
			LP	10	28000			
GDLRB24	24*27*15	2 burner,independent manual control	NG	4	56000	16.4	108	306
			LP	10	56000			
GDLRB36	36*27*15	3 burner,independent manual control	NG	4	84000	24.6	188	165
			LP	10	84000			
GDLRB48	47*27*15	4 burner,independent manual control	NG	4	112000	32.8	295	135
			LP	10	112000			













GAS STOCK POT STOVES



Standard Features:

- High quality stainless steel, corrosion resistant and easy cleaning.
- Heavy duty cast iron grates and burner, great cooking performance.
- Adjustable pilot light.
- Storage cabinet.
- Adjustable stainless steel feet.
- Slide in and out oil tray.
- 3/4" NPT rear gas connection and regulator standard.
- Mounting type: freestanding.
- Gas type and Pressure: 4"Natural/10"propane gas.
- ETL certificate.
- Usage scenario: Kitchen, Outdoor

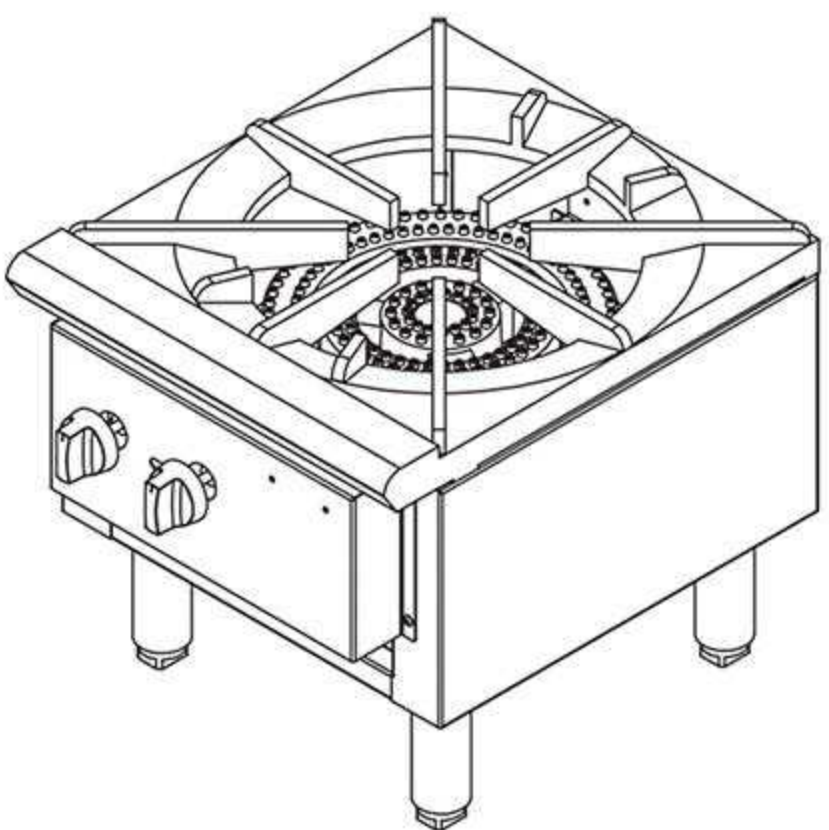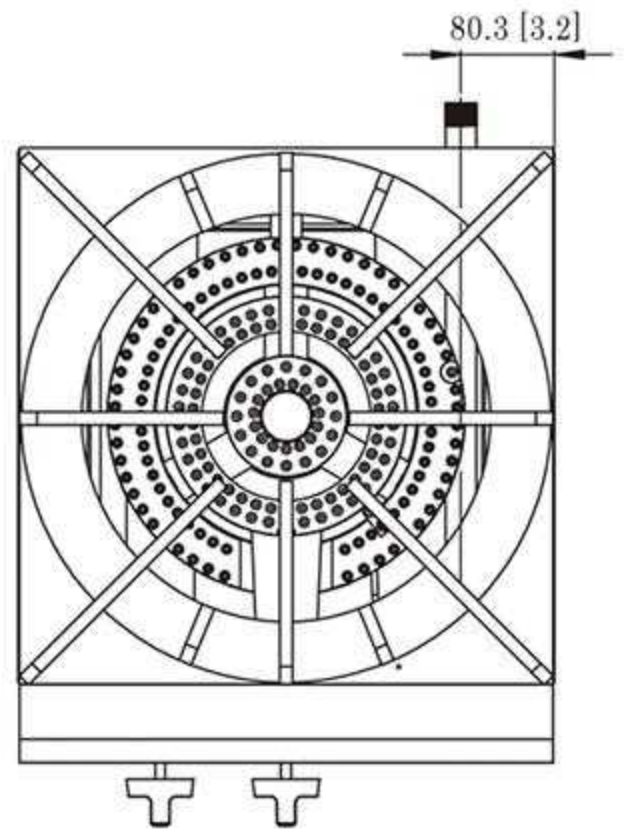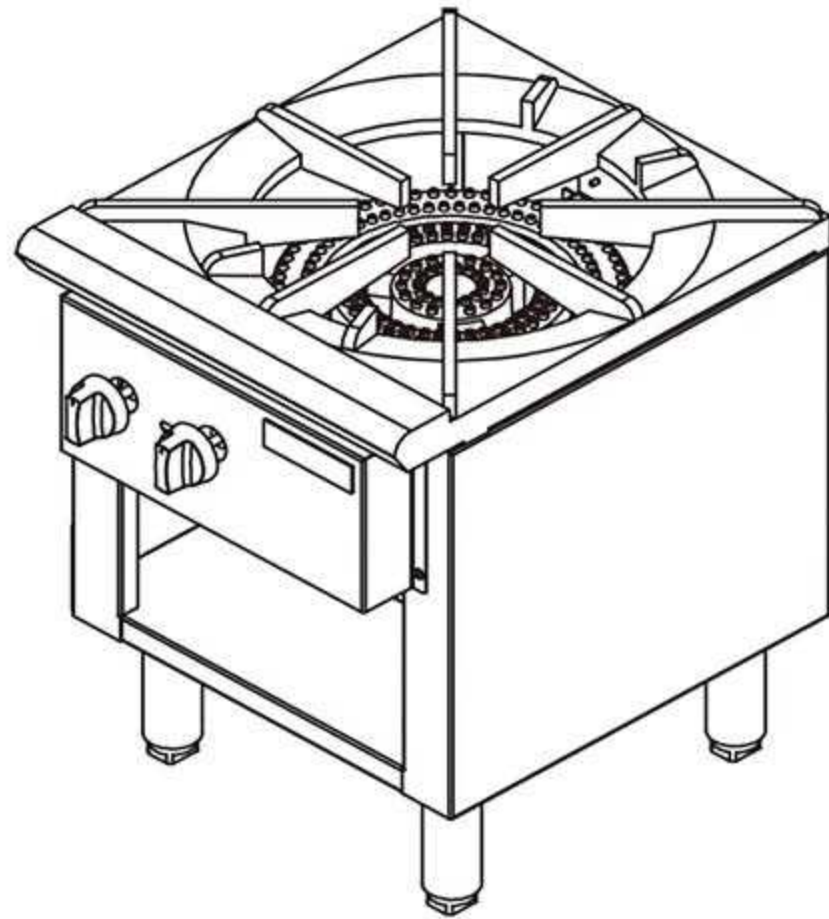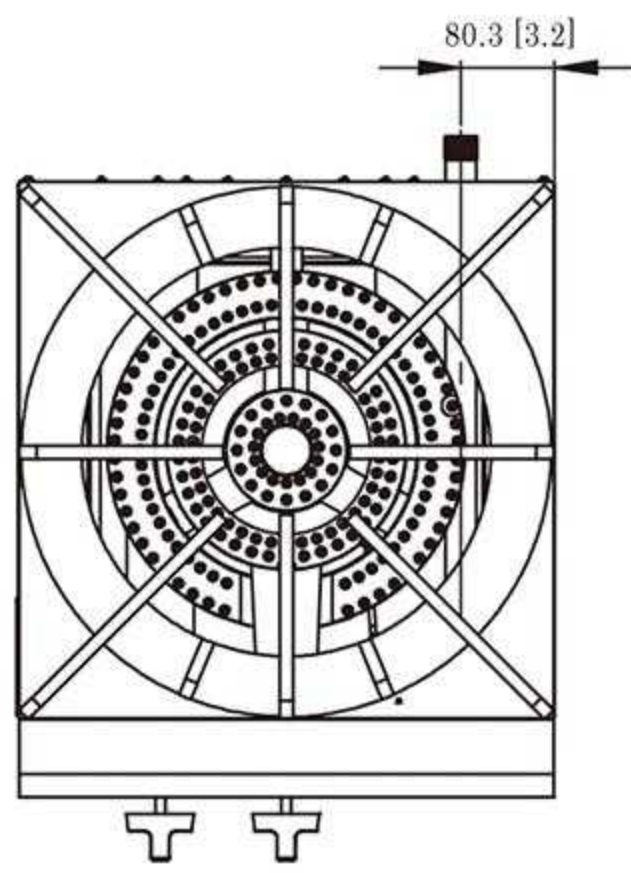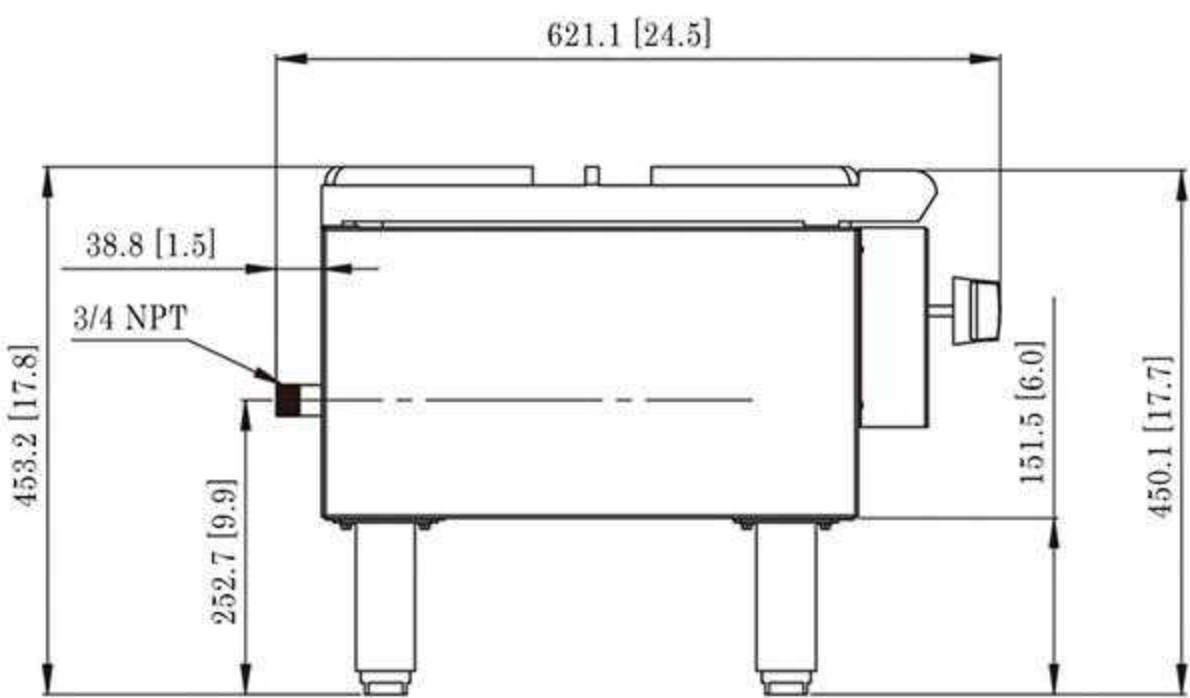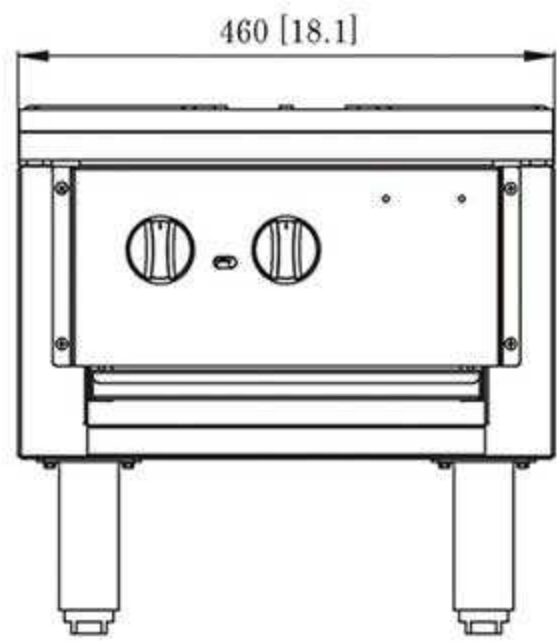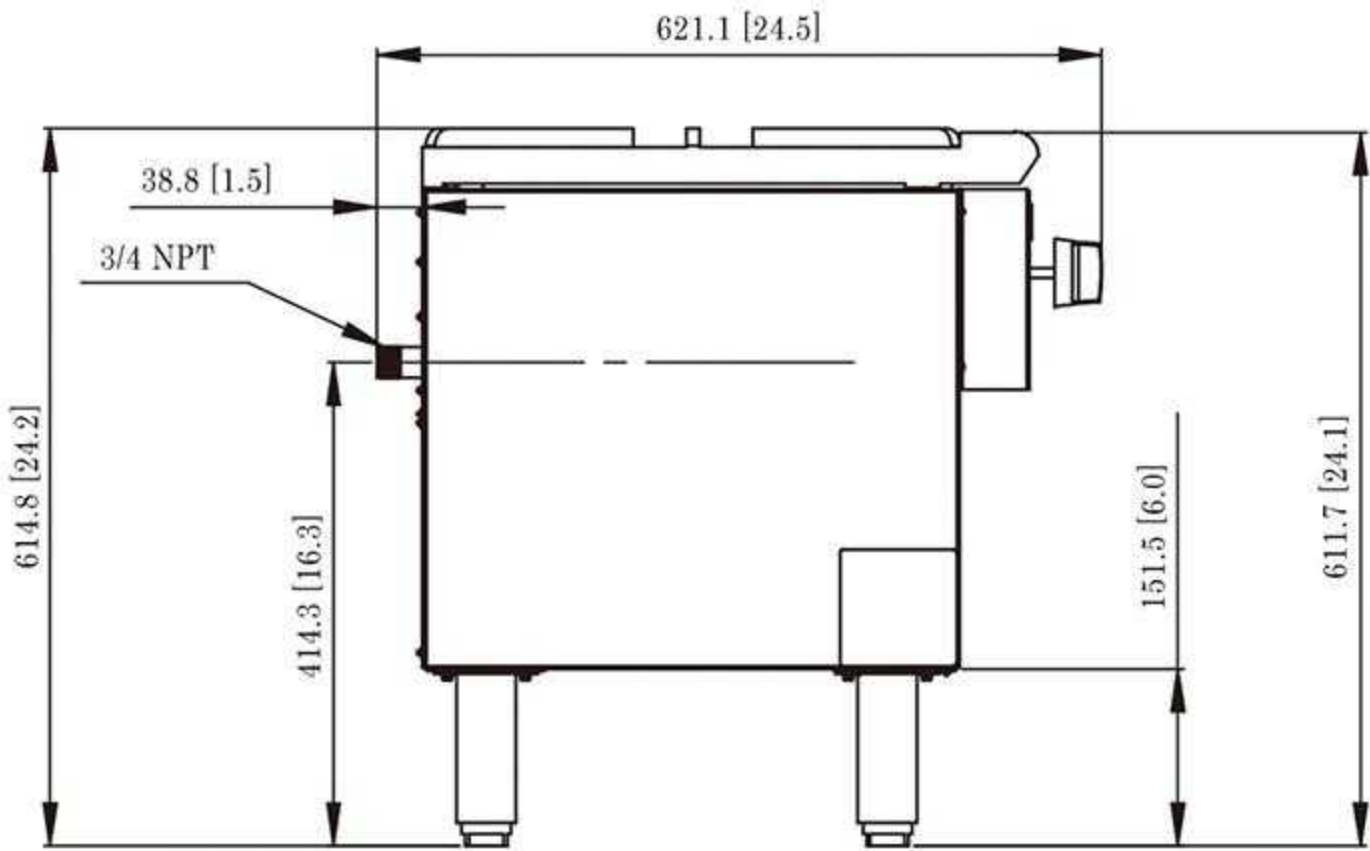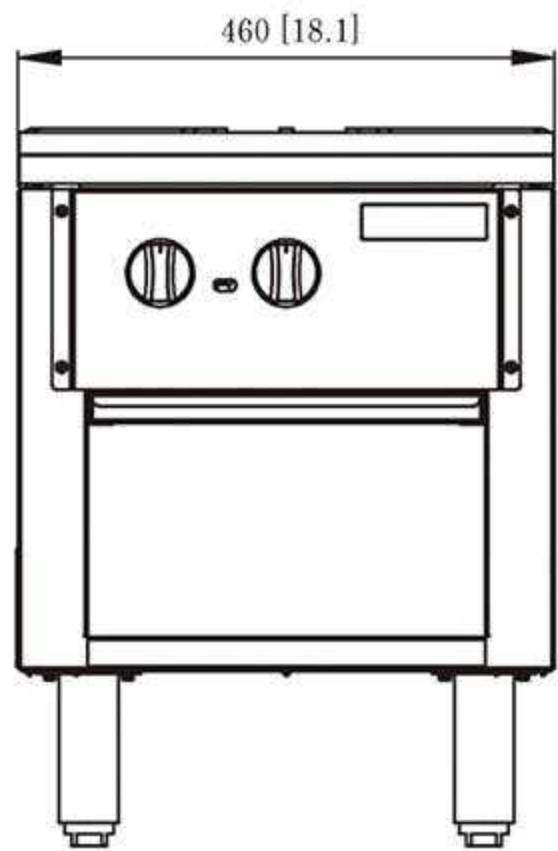

GDSP18-18

Model no	Product Dimensions WxDxH (inch)	Burners and Control method	Gas type	Intake-tube Pressure (in.W.C.)	Total BTU B.T.U./h	Power (kw)	Gross Weight (lb)	40HQ load capacity
GDSP18-18	18*21*18	2 burner,independent manual control	NG	4	90000	26.4	98	298
			LP	10	90000			
GDSP18-25	18*21*25	2 burner,independent manual control	NG	4	90000	26.4	104	224
			LP	10	90000			





GAS RANGES

4, 6 & 8 BURNER MODELS



Range

- High quality stainless steel, corrosion resistant and easy cleaning.
- Heavy-duty 12" x 12" removable cast-iron grates.
- Stainless steel removable crumb drawer under burners.
- Selfing cleaning burners rated at 32000 BTU / burner.
- One pilot light for each burner.
- 6" Adjustable stainless steel legs.
- 3/4" NPT rear gas connection and regulator provided.
- Natural gas/LP conversion kit.

Oven-Standard

- 25000 BTU/h 24" oven and 35000 BTU/h 36" oven.
- Oven temperature range from 175 °F to 550 °F.
- Oven pilot with 100% safety shut off.
- The standard oven has one shelf and one baking tray.



GR24-4



GR36-6



GR48-8

Model no	Product Dimensions WxDxH (inch)	Burners Name	Total BTU B.T.U./h	Number of Burners	Gas type	Intake-tube Pressure (in.W.C.)	Gross Weight (lb)	40HQ load capacity
GDGR24-4	24*34*59	Hot Plates	128000	4	NG	5	302	56
		Oven	25000	1	LP	10		
GDGR36-6	36*34*59	Hot Plates	192000	6	NG	5	362	44
		Oven	35000	1	LP	10		
GDGR48-8	48*34*59	Hot Plates	256000	8	NG	5	540	42
		Oven	50000	2	LP	10		

GAS RANGES

WITH GRIDDLE TOPS



Griddle

- Stainless steel front, sides and splash guards.
- Fully welded griddle plate.
- Heavy duty , highly polished 3/4" griddle plate.
- Drip tray provided under burners to catch grease drippings.
- 18000 BTU /h griddle burners.
- 6" Adjustable stainless steel legs.
- 3/4" NPT rear gas connection and regulator provided.
- Natural gas/LP conversion kit.

Oven-Standard

- 25000 BTU/h 24" oven and 35000 BTU/h 36" oven.
- Oven temperature range from 175 °F to 550 °F.
- Oven pilot with 100% safety shut off.
- The standard oven has one shelf and one baking tray.



GDGR24-24G



GDGR36-36G

Model no	Product Dimensions WxDxH (inch)	Burners Name	Total BTU B.T.U./h	Number of Burners	Valve Types	Gross Weight (lb)	40HQ load capacity
GDGR24-24G	24*34*59	Griddle	36000	2	Pilot light	377	56
		Oven	25000	1			
GDGR36-36G	36*34*59	Griddle	54000	3	Pilot light	474	44
		Oven	35000	1			
GDGR48-48G	48*34*59	Griddle	72000	4	Pilot light	701	42
		Oven	50000	2			



GAS RANGES

24" AND 36" COMBINATION

Standard Features:

- Stainless steel front, sides, kick plate, back guard and over shelf.
- 24" combination ranges with 2 burners and a 12" griddle.
- 36" combination ranges with 2 burners and a 24" griddle or 4 burners and a 12" griddle.
- Heavy duty , highly polished 3/4" griddle plate.
- Stainless steel removable crumb drawer under burners.
- 32000 BTU / h top burners, 18000 BTU /h griddle & 25000 BTU/h 24" oven or 35000BTU/ h 36" oven.
- Oven temperature range from 175 °F to 550 °F.
- 6" Adjustable stainless steel legs.
- Standarding pilot for open top burners.
- Oven pilot with 100% safety shut off.
- Multiple position oven rack guides.
- The standard oven has one shelf and one baking tray.
- 3/4" NPT rear gas connection and regulator provided.
- Natural gas/LP conversion kit.



GDGR24-2-12G



GDGR36-2-24G

Model no	Product Dimensions WxDxH (inch)	Burners Name	Total BTU B.T.U./h	Number of Burners	Valve Types	Gross Weight (lb)	40HQ load capacity
GDGR24-2-12G	24*34*59	Hot plates	64000	2	Pilot light	331	56
		Griddle	18000	1			
		Oven	25000	1			
GDGR36-4-12G	36*34*59	Hot plates	128000	4	Pilot light	399	44
		Griddle	18000	1			
		Oven	35000	1			
GDGR36-2-24G	36*34*59	Hot plates	64000	2	Pilot light	437	44
		Griddle	36000	2			
		Oven	35000	1			

GAS RANGES

48" COMBINATION

Standard Features:

- Stainless steel front, sides, kick plate, back guard and over shelf.
- 48" combination ranges with 6 burners & a 12" griddle & two 24" ovens.
- 4 burners & a 24"griddle & two 24" ovens.
- 2 burners & a 36"griddle & two 24" ovens.
- Heavy duty , highly polished 3/4" griddle plate.
- Stainless steel removable crumb drawer under burners.
- 32000 BTU / h top burners, 18000 BTU /h griddle & 25000 BTU/h 24" oven.
- Oven temperature range from 175 °F to 550 °F.
- 6" Adjustable stainless steel legs.
- Standarding pilot for open top burners.
- Oven pilot with 100% safety shut off.
- Multiple position oven rack guides.
- The standard oven has one shelf and one baking tray.
- 3/4" NPT rear gas connection and regulator provided.
- Natural gas/LP conversion kit.



GDGR48-4-24G

Model no	Product Dimensions WxDxH (inch)	Burners Name	Total BTU B.T.U./h	Number of Burners	Valve Types	Gross Weight (lb)	40HQ load capacity
GDGR48-6-12G	48*34*59	Hot plates	192000	6	Pilot light	580	42
		Griddle	18000	1			
		Oven	50000	2			
GDGR48-4-24G	48*34*59	Hot plates	128000	4	Pilot light	620	42
		Griddle	36000	2			
		Oven	50000	2			
GDGR36-2-36G	48*34*59	Hot plates	64000	2	Pilot light	662	42
		Griddle	54000	3			
		Oven	50000	2			



GAS RANGES

60" COMBINATION

Standard Features:

- Stainless steel front, sides, kick plate, back guard and over shelf.
- 60" combination ranges with.
- 6 burners & a 24" griddle & one24" oven+one 36" oven.
- 4 burners & a 36" griddle & one24" oven+one 36" oven.
- 2 burners & a 48"griddle & one24" oven+one 36" oven.
- Heavy duty , highly polished 3/4" griddle plate.
- Stainless steel removable crumb drawer under burners.
- 32000 BTU / h top burners, 18000 BTU /h griddle. & 25000 BTU/h 24" oven or 35000BTU/ h 36" oven.
- Oven temperature range from 175 °F to 550 °F.
- 6" Adjustable stainless steel legs.
- Standarding pilot for open top burners.
- Oven pilot with 100% safety shut off.
- Multiple position oven rack guides.
- The standard oven has one shelf and one baking tray.
- 3/4" NPT rear gas connection and regulator provided.
- Natural gas/LP conversion kit.



GDGR60-6-24G



GDGR60-4-36G

Model no	Product Dimensions WxDxH (inch)	Burners Name	Total BTU B.T.U./h	Number of Burners	Valve Types	Gross Weight (lb)	40HQ load capacity
GDGR60-6-24G	60*34*59	Hot plates	192000	6	Pilot light	677	38
		Griddle	36000	2			
		Oven	60000	2			
GDGR60-4-36G	60*34*59	Hot plates	128000	4	Pilot light	717	38
		Griddle	54000	3			
		Oven	60000	2			
GDGR60-2-48G	60*34*59	Hot plates	64000	2	Pilot light	756	38
		Griddle	72000	4			
		Oven	60000	2			

GAS FRYER



Standard Features:

- High quality stainless steel, corrosion resistant and easy cleaning.
- Tank fully peened for easy cleaning and great cooking performance.
- Key componets have CSA / ETL certificate.
- 6" adjustable stainless steel legs can be removed when packing to reduce the transportation cost.
- Solid state control,200°F to 400°F.
- Natural gas /LP conversion kit included.
- Castors optional.
- Mounting type: freestanding.
- Usage scenrio: Kitchen, Outdoor.
- 3/4" NPT rear gas connection and regulator standard.
- Heavy duty cast-iron burners.



GDF5S

GDF4S

GDF3S

Model no	Product Dimensions WxDxH (inch)	Burners	Gas type	Intake-tube Pressure (in.W.C.)	Total BTU B.T.U./h	Fryer Baskets	Capacity (l)	Gross Weight (lb)	40HQ load capacity
GDF3S	15.5*31.3*45.3	3	NG	4	90000	2	18.5-23	126	210
			LP	10	90000				
GDF4S	15.5*31.3*45.3	4	NG	4	120000	2	21.3-25	139	210
			LP	10	120000				
GDF5S	21*35.3*45.3	5	NG	4	150000	2	31-37	183	168
			LP	10	150000				



ELECTRIC CREPE MAKER



Standard Features:

- Full stainless steel structure.
- Adjustable temperature control from 0 to 300°C.
- Teflon non-stick layer, rapid heat transfer.
- Removable tempered protective glass.



ECM-410Y



CSS-B62

Electric Crepe Maker

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
ECM-410Y	400*400*125	220-240	2200	15.5	17	450*450*190

Crepe Serving Station

Model no	Dimensions (mm)	N.W (kg)	G.W (kg)	Packing Size (mm)
CSS-B62	850*600*420	23	24	900*650*240



Electric Crepe Maker

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
ECM-1Y/350	380*440*210	220-240	3000	15	16.5	520*420*230
ECM-1Y/400	420*470*210	220-240	3000	22.5	24.2	560*520*230
ECM-2Y/350	760*440*210	220-240	6000	28.2	30.1	820*520*230
ECM-2Y/400	870*470*210	220-240	6000	40	43.5	920*520*230



ECM-01



ECM-02

Electric Crepe Maker

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
ECM-01	485*450*220	220-240	3000	15.2	16.3	500*530*260
ECM-02	860*450*220	220-240	6000	30	32	530*940*260



WM-H30



WM-H40

Platen halberd furnace

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-H30	570*330*205	220-240	2000	11.8	13.5	580*390*260
WM-H40	670*430*205	220-240	2400	19.3	21.3	680*490*260

ELECTRIC SALAMANDER



Standard Features:

- Stainless steel structure.
- Particular suitable for restaurant, pub, snack bar etc.
- Chromed grid easy to clean.
- Ideal for grilling or heating up dishes or sandwiches.
- CE approved.



Counter Top electric salamander

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
SA-936	610*340*280	220-240	2000	13.5	15	670*360*310
SA-937	800*450*470	220-240	4000	29	31	860*500*460
SA-938	580*390*390	220-240	2200	19	20.5	640*440*390



Electric Lift-up salamander

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
SA-450S	450*480*500	220-240	2800	37	38.5	520*560*580
SA-600S	600*480*520	220-240	4000	47	48.5	670*560*580
SA-800S	800*480*520	220-240	5600	60	62	870*560*580

ELECTRIC GRIDDLE



Standard Features:

- All stainless steel construction, easy clean surface.
- High efficient, energy-saving & useful.
- Solid 12mm thick steel cooking plate.
- Full sized cooking area.
- Auto constant temperature control.



EG-410



EG-410-2



EG-410D

Electric Griddle | all flat surface

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
EG-410	415*500*255	220-240	2500	29	30.5	465*560*280
EG-600	600*520*310	220-240	5000	33	35	650*580*340
EG-1000	1000*520*310	220-240	6000	50	53	1050*580*340

Electric Griddle | half flat & half grooved surface

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
EG-410-2	415*500*255	220-240	2500	29	30.5	465*560*280
EG-600-2	600*520*310	220-240	5000	33	35	650*580*340
EG-1000-2	1000*520*310	220-240	6000	50	53	1050*580*340

Electric Griddle | chrome surface

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
EG-410D	415*500*255	220-240	2500	29	30.5	465*560*280
EG-600D	600*520*310	220-240	5000	33	35	650*580*340
EG-1000D	1000*520*310	220-240	6000	50	53	1050*580*340



ELECTRIC CONTACT GRILL



Standard Features:

- Stainless steel frame.
- Grill plate made of cast iron for ideal heat transfer.
- Large grooved plates.
- Thermostat set up to a maximum of 300°C.
- Heating indicator light.
- Operating light on/off.



CG811
Upper Plate Size:214 x 214mm
Bottom Plate Size:235 x 225mm

Counter Top electric salamander

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
CG811	310*410*210	220-240	1800	13	14	395*420*245



CG811E
Upper Plate Size:338 x 235mm
Bottom Plate Size:345 x 235mm



CG813
Upper Plate Size:214 x 214mm
Bottom Plate Size:485 x 235mm

Counter Top electric salamander

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
CG811E	435*100*210	220-240	2200	19	20	510*420*245

Counter Top electric salamander

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
CG813	570*410*210	220-240	3600	25.5	27	670*420*245



Standard Features:

- Stainless steel frame.
- Non-stick grill plate.
- Thermostat set up to a maximum of 300°C.
- Heating indicator light.
- Operating light on/off.



Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
CG-U320	280*220*560	220-240	1000	9	10.5	620*330*180



Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
CG-353+U320	500*305*630	220-240	3200	23.5	25	560*355*460
CG-705+U320	605*500*630	220-240	6400	35.5	37	660*560*460





WAFFLE MAKER



Standard Features:

- Stainless steel frame.
- Cast iron round shape portionable in 4.
- Heating indicator light.
- Adjustable thermostat from 0 °C to 250 °C.
- Plate diameter: 180mm.
- Tooth depth: 8mm.



Counter Top electric salamander

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-1	390*250*260	220-240	1300	5.5	6.2	430*305*295
WM-2	500*390*260	220-240	2600	13	14	550*425*282

Standard Features:

- Stainless steel frame.
- Cast iron rectangle shape portionable in 2.
- Heating indicator light.
- Adjustable thermostat from 0 °C to 250 °C.
- Entire board size :252 x 252mm.
- Board dimension: 170 x 105mm.



Counter Top electric salamander

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-4	440*305*225	220-240	2000	19	20.5	525*350*320



Ballcrisp Maker

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-2250-D	405*500*250	220-240	2000	21	22.5	560*465*305

Round Waffle Maker

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-2250-E	310*380*240	220-240	1750	9.2	10.7	430*360*290



Firecrackers

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-2273	410*305*240	220-240	1750	9.5	11	450*350*280



ROTARY WAFFLE MAKER



Standard Features:

- Stainless steel frame.
- Cast iron round shape portionable in 4.
- 180° plate rotation.
- Heating indicator light.
- Adjustable thermostat from 0 °C to 250 °C.



WM-2001

Round professional waffle maker 180° opening

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-2001	265*415*245	220-240	1200	8.3	9.8	470*315*295

PEPLACEABLE PLATE WAFFLE MAKER

Standard Features:

- Stainless steel frame.
- Cast iron plate.
- 180° plate rotation.
- Heating indicator light.
- Adjustable thermostat from 0 °C to 250 °C.
- Waffle plate can be changed.



WM-2003



WM-2004

Cat's Paw waffle maker 180° opening

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-2003	250*540*265	220-240	1400	11	12.5	510*350*320

Series Firing waffle maker 180° opening

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-2004	250*540*265	220-240	1400	11.4	12.9	510*350*320

PEPLACEABLE PLATE WAFFLE MAKER



Standard Features:

- Stainless steel frame.
- Cast iron plate.
- 180° plate rotation.
- Heating indicator light.
- Adjustable thermostat from 0 °C to 250 °C.
- Waffle plate can be changed.



WM-2005



WM-2006

Waffle Maker 180° opening

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-2005	255*530*250	220-240	1400	10.8	12.3	505*285*360

Crispy Waffle Maker 180° opening

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
WM-2006	255*530*250	220-240	1400	10.8	12.3	505*285*360

Optional :

- Plate can be changed.





SOUS VIDE COOKER



Standard Features:

- Can memory the working status before disconnecting and the last setting working temperature.
- Stainless steel body design: high-end quality , solid , durable and occupy only a little space of the conister.
- The lowest water level and the highest water level protection device , safe and reliable.
- Strong water circulation capacity and more balanced water temperature.
- Two temperture mode setting (°C/°F) for different usage habits.
- Touch buttons for easy operation.
- IPX7 waterproof , more secure.
- 100% anti-dry, high safety.
- Optional WIFI control, smarter.



GDSV130



GDSV340

Model no	Dimensions (mm)	Voltage (v)	Power (Kw)	Temperature (°C)	Suggest volume	N.W (kg)
GDSV130	71*145.4*340	110-120V~60Hz I 220-240V~50Hz	1.5	5-99	≤ 20L ≤ 30L	1.3
GDSV340	173*142*328	110-120V~60Hz I 220-240V~50Hz	2.3	5-95	≤ 60L ≤ 80L	3.1

VACUUM PACKAGE MACHINE

Standard Features:

- Add bag-clamp device inside the vacuum champer, users can place and fix the bag easily.
- Save time: use large displacement pump to increase vacuum speed.
- Compact size, suitable for commercial and household use.
- Effectively vacuum seals liquid and wet food.
- Can use with ordinary plastic bag, save cost.
- Vacuum gauge display vacuum level directly.
- Adjustable cycle time and seal time.
- Extends the shelf life of food.
- No need of normal filler plates.
- Instant seal function.



Model no	Dimensions (mm)	Voltage (v)	Power (Kw)	Pump pressure	Chamber size (mm)	N.W (kg)
GDYS822	425*359*345	110-120V~60Hz I 220-240V~50Hz	0.63	-29.5" Hg/ -999mba	350*300*110	24.4

ELECTRIC FRYER



Standard Features:

- Casing and oil container made of stainless steel.
- Ideally suited for restaurant, pub, snack bar etc.
- Removable oil container make it easier to clean.
- Heating indicator light.
- Frying basket and lid are dishwasher-safe.
- Overheat protection with reset.



GDEF4L



GDEF4L2

Model no	Dimensions (mm)	Voltage (v)	Power (Kw)	Capacity (L)	Temperature (°C)	N.W (kg)
GDEF4L	215*548*323	220-240	2	4	50-190	4.5
GDEF4L2	437*487*323	220-240	2 x 2	4+4	50-190	8.5
GDEF8L	263*658*349	220-240	2.85	8	50-190	6
GDEF8L2	540*658*349	220-240	2.85 x 2	8+8	50-190	11.5

DEEP FRYER WITH DRAIN TAP

Standard Features:

- Made of stainless steel
- With frying basket and lid
- With drain tap for easy to change the oil
- Stamping oil container easy to clean
- Indicator light and with over-heating protection



Model no	Dimensions (mm)	Voltage (v)	Power (Kw)	Capacity (L)	Chamber size (mm)	N.W (kg)
FY-8LFE	340*540*460	220-240	3.25	7.5-8.25	50-190	9
FY-8LFE2	635*540*460	220-240	3.25 x 2	15-16.5	50-190	15.7



TOASTER



Standard Features:

- Stainless steel housing.
- Front and back output.
- From 180 up tp 720 slices of toast per hour.
- 3 level heat setting.
- Height adjustable feet.



TS-2

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
TS-2	275*220*220	220-240	1110	3.8	5.3	290*265*270



TS-4



TS-6

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
TS-4	315*275*220	220-240	1850	4.8	6.3	360*290*270
TS-6	405*275*220	220-240	2590	5.8	7.3	460*290*270

CONVEYOR TOASTER



Standard Features:

- Stainless steel.
- Heating indicator light.
- Adjustable thermostat.
- Adjustable speed belt control.
- From 180 up tp 720 slices of toast per hour.



TS-150

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
TS-150	290*560*415	220-240	1300	12	14	360*510*380



TS-300



TS-450

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
TS-300	370*560*405	220-240	2200	13.2	16	440*510*380
TS-450	470*560*415	220-240	2600	30.5	33.5	540*510*380



INDUCTION COOKER



Standard Features:

- Stainless steel body.
- Glass hob/Schott ceran hob / Eurokera France Hob.
- Touch control panel with safety lock.
- Electronic overheating protection.
- 1-10 temperature setting.
- Timer, LCD display (0-180 mins).



Model no	Dimensions (mm)	Voltage (v)	Power (w)	Temperature (°C)
IC-HBE35	340*432*125	220-240V 50~60Hz	500-3500	60-240
IC-E500F	390*490*140	380-400V 3N-50~60Hz	500-5000	60-240
IC-E800B	440*540*145	380-400V 3N-50~60Hz	500-8000	60-240

Standard Features:

- Stainless steel body.
- Wok induction.
- Touch control panel with safety lock.
- Half bridge technology.
- Electronic overheating protection.
- 1-10 temperature setting.
- Timer, LCD display (0-180 mins).



Model no	Dimensions (mm)	Voltage (v)	Power (w)	Temperature (°C)
IC-HBE35-1	340*432*125	220-240V 50~60Hz	500-3500	60-240

Standard Features:

- Stainless steel body.
- Wok induction.
- Touch control panel with safety lock.
- Half bridge technology.
- Electronic overheating protection.
- 1-10 temperature setting.
- Timer, LCD display (0-180 mins).



Model no	Dimensions (mm)	Voltage (v)	Power (w)	Temperature (°C)
IC-HBE35-1	340*432*125	220-240V 50~60Hz	500-3500	60-240



Standard Features:

- Stainless steel body.
- Glass hob/Schott ceran hob / Eurokera France Hob.
- Temperature controlled by knob.
- Electronic overheating protection.



Model no	Dimensions (mm)	Voltage (v)	Power (w)	Temperature (°C)
IC-HBE35-1	340*432*125	220-240V 50~60Hz	500-3500	60-240

INDUCTION DEEP FRYER

Standard Features:

- Stainless steel body.
- Touch control.
- With cold zone.
- Electronic overheating protection.
- Timer, LCD display (0-120 mins).



Model no	Dimensions (mm)	Voltage (v)	Power (w)	Temperature (°C)
IC-HBE35-1	340*432*125	220-240V 50~60Hz	500-3500	60-240

INDUCTION WARMING PLATE

Standard Features:

- Glass hob.
- Stainless steel body with two stainless steel handles.
- Power regulation knob.
- Temperature display on the right corner of the glassplate.
- Electronic overheating protection.



Model no	Dimensions (mm)	Voltage (v)	Power (w)	Temperature (°C)
IC-HBE35	340*432*125	220-240V 50~60Hz	500-3500	60-240
IC-E500F	390*490*140	380-400V 3N-50~60Hz	500-5000	60-240
IC-E800B	440*540*145	380-400V 3N-50~60Hz	500-8000	60-240



COMMERCIAL INDUCTION STOVE



Standard Features:

- Large area heating area, can cook a variety of ingredients at the same time, no need to wait.
- Each burner has an independent controlling cassette mechanism to improve product heating efficiency.
- Easily control the power at any level,easy cooking.
- Strong exhausting fans, low noise design.
- IGBT imported from Germany.
- Suitable for various types of kitchen enviroment free combination.
- 304 Stainless steel material, 1.5 mm thickness, glass thickness: 6mm.
- Adust the temperature and timer by knob.
- 0-180 minute timer.



Commercial Double Induction Stove

Model no	Dimensions (mm)	Voltage (v)	Power (w)	Temperature (°C)
ISG2-D-H7	400*700*(860~900)	380 V 3N~	5000 x 2	60~240
ISG4-D-H7-W1	800*700*(860~900)	380 V 3N~	5000 x 4	60~240

COMMERCIAL INDUCTION GRILL



Model no	Dimensions (mm)	Voltage (v)	Power (w)	Temperature (°C)
SIG-H7N	800*700*980	380 V 3N~	10000	60~300
SIG-H9N	800*900*980	380 V 3N~	10000	60~300
SIG-H7T	800*700*980	380 V 3N~	10000 x 2	60~300
SIG-H9T	800*900*980	380 V 3N~	10000 x 2	60~300

COMMERCIAL INDUCTION DEEP FRYER



Standard Features:

- Solid stianless steel body design.
- Clear LED display.
- Easy control panel.
- Overheat protection.
- Timer range from 0 to 120 mins.



SIDF-H7



SIDF-H7x2

Model no	Dimensions (mm)	Voltage (v)	Power (w)	Temperature (°C)	Capacity (L)
SIDF-H7	400*700*980	380 V 3N~	10000	60~190	30
SIDF-H9	400*900*980	380 V 3N~	10000	60~190	30
SIDF-H7x2	800*700*980	380 V 3N~	10000 x 2	60~190	30+30
SIDF-H9x2	800*900*980	380 V 3N~	10000 x 2	60~190	30+30

RICE COOKER

Standard Features:

- Easy use mechanical control.
- Cooking rice and keeping it warm automatically.
- Measuring cup, rice spoon included.
- Silicone non-stick pad included for 10L and 14L.
- Indicator light for cooking and keeping warm.



Commercial Double Induction Stove

Model no	Dimensions (mm)	Voltage (v)	Power (w)	Temperature (°C)
ISG2-D-H7	400*700*(860~900)	380 V 3N~	5000 x 2	60~240
ISG4-D-H7-W1	800*700*(860~900)	380 V 3N~	5000 x 4	60~240



POPCORN MACHINE



Standard Features:

- Temperature range:30℃~245℃.
- Popcorn maximum capacity: 490X350X120mm.
- Stainless steel kettle size: Ø215X64mm.
- Warming light:230V 100W.
- Motor: 220V 50Hz 20W 22rpm.
- Popcorn kettle is easy to install, dismantle and clean.
- All sides glass can show the popcorn productive progress comprehensively.
- Efficiency heating and warming system make the working process convenient and fast.



PCM-1608



PCM-817

8OZ Popcorn Machine

Model no	Voltage (v)	Power (kw)	Dimension (mm)
PCM-1608	220v 50Hz	1.3	560*420*680
PCM-817	220v 50Hz	1.3	560*420*750



MC-300



PWS-68

8OZ popcorn machine cart

Model no	Dimension (mm)
MC-300	500*360*680

Pop warming showcase

Model no	Dimension (mm)	Voltage (v)	Power (kw)
PWS-68	450*470*500	220v 50Hz	0.85

CANDY FLOSS MACHINE



Standard Features:

- Output: can make one candy floss in 30 seconds.
- Pink and gold color are available.



MF08



MF01H

Mini Candy Floss Machine

Model no	Voltage (v)	Power (kw)	Dimension (mm)
MF08	220v 50Hz	0.42	285*285*165

Electric Candy Floss Machine

Model no	Voltage (v)	Power (kw)	Dimension (mm)
MF01HA	220v 50Hz	1.08	520*520*480
MF01HB	220v 50Hz	1.08	720*720*500



MF03H



MF05

Electric Candy Floss Machine

Model no	Voltage (v)	Power (kw)	Dimension (mm)
MF03HA	220v 50Hz	1.08	520*520*390
MF03HB	220v 50Hz	1.08	720*720*400

Electric Candy Floss Machine With Cart

Model no	Voltage (v)	Power (kw)	Dimension (mm)
MF05A	220v 50Hz	1.08	960*520*870
MF05B	220v 50Hz	1.08	960*720*895



WATER BOILER



Standard Features:

- Material: SS304/ single wall.
- ABS handle.
- Plastic water tap.
- Visual water gauge.
- On/off switch with silicone rubber cover.
- Heating and keep warm indicator light.
- Maintenance window in the middle of the plastic base.
- Skid-proof rubber feet.
- Automatic shut-off and keep warm features.
- Double over heat safety protection.



Model no	Dimensions (mm)	Capacity (L)	Voltage (v)	Power (w)	Packing Size (mm)
WB-50D-A1	Φ220*420 H	5	220-240	1500	290*290*450
WB-68D-A1	Φ220*430 H	6.8	220-240	1500	290*290*468
WB-88D-A1	Φ220*465 H	8.8	220-240	1500	290*290*502
WB-100D-A1	Φ220*490 H	10	220-240	1500	290*290*530
WB-150D-A1	Φ290*460 H	15	220-240	2500	350*350*515
WB-180D-A1	Φ290*500 H	18	220-240	2500	350*350*550
WB-220D-A1	Φ290*560 H	22	220-240	2500	350*350*610
WB-250D-A1	Φ290*620 H	25	220-240	2500	350*350*675

COFFEE PERCOLATOR



Standard Features:

- Material: SS304 for the internal , SS430 for the outside.
- Stainless steel lid.
- ABS handle.
- Plastic water tap.
- Visual water gauge.
- On/off switch with silicone rubber cover.
- Heating and keep warm indicator light.
- Maintenance window in the middle of the plastic base.
- Skid-proof rubber feet.
- Automatic shut-off and keep warm features.
- Double over heat safety protection.



Model no	Dimensions (mm)	Capacity (L)	Voltage (v)	Power (w)	Packing Size (mm)
CU-5L	Φ220*420 H	5	220-240	950	290*290*450
CU-6L	Φ220*437 H	6	220-240	950	290*290*468
CU-7L	Φ220*472 H	7	220-240	950	290*290*502
CU-8L	Φ220*504 H	8	220-240	950	290*290*550
CU-12L	Φ290*485 H	12	220-240	1500	350*350*535
CU-14L	Φ290*517 H	14	220-240	1500	350*350*570
CU-18L	Φ290*581 H	18	220-240	1500	350*350*630



PORTABLE DISPLAY WARMING PLATE FOR BUFFET



Standard Features:

- Portable Display Warming Plate For Buffet.
- The portable display warming plate for buffet keep the prepared food in the right temperature without affecting the quality.
- They are the perfect choice for the self-service area and the customer service area.
- Keep food in a safe supply temperature.
- The bottom of the equipment is controlled by constant temperature device, and the device is with digital temperature indication.
- The top of GD-01 type is equipped with the halogen lamp which emits heat and lighting, and the halogen lamp is controlled by the standard toggle switch.
- GD-01 contains a GN1/1 size food dish of 65mm high.
- It is equipped with removable apparatus plate which is easy to clean.
- All models have a wire of 1829mm (72') long and a plug.
- It is equipped with a transparent glass dust cover.
- GD-01 with a single transparent glass dust cover, with food plate as accessory.



GD-01

INFRARED THERMAL INSULATION STATION

Standard Features:

- The color will be black if the color is not designated.
- GD-03 infrared thermal insulation station, black, with light and food dish.



GD-03

Model no	Dimensions (mm)	Capacity	Temperature (°C)	Power (w)	N.W (kg)
GD-01	825*660*580	1* GN 1/1 65mm deep	30-90	800	27
GD-03	641*330*448	26L	50	530	9

CUP WARMER



Standard Features:

- Material: stainless steel.
- Tray for cups, saucers etc.
- Temperature range from 0 to 75 °C.



CW-1



CW-2



CW-3

Model no	Dimensions (mm)	Voltage (v)	Power (w)	N.W (kg)	G.W (kg)	Packing Size (mm)
CW-1	360*250*250	220-240	140	8.5	10	385*290*570
CW-2	360*320*550	220-240	140	11.7	13.2	385*360*570
CW-3	395*430*695	220-240	210	20.5	22.2	490*445*745

TELESCOPIC FOOD WARMING LAMP

Standard Features:

- Telescopic design, can adjust from 600 to 1500mm.
- With 1 pcs 250w anti-explosion bulb.



Plating			
Model no	Voltage (v)	Power (kw)	Lamp dia (mm)
HL-A	220-240	0.25	175
HL-B	220-240	0.25	175
HL-C	220-240	0.25	270
HL-D	220-240	0.25	290
HL-E	220-240	0.25	290
HL-F	220-240	0.25	290

Electroplate			
Model no	Voltage (v)	Power (kw)	Lamp dia (mm)
HLE-A	220-240	0.25	175
HLE-B	220-240	0.25	175
HLE-C	220-240	0.25	270
HLE-D	220-240	0.25	290
HLE-E	220-240	0.25	290
HLE-F	220-240	0.25	290